

WS 40 FS SERIES

Characteristics




- One-stage gas burner.



Power kW	Model	Article No.	Powe supply	Motor power W	Package size LxPxH(mm)	Weight kg
42~116	WS 40 FS10	101 011 002	230V 50Hz	90	490x480x325	16
81~220	WS 40 FS20	101 011 003	230V 50Hz	150	560x460x370	20


*60 Hz can be cusomized

Size

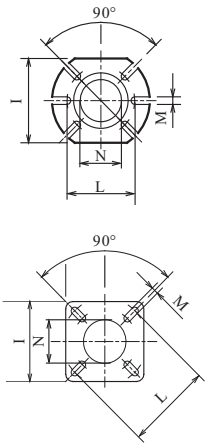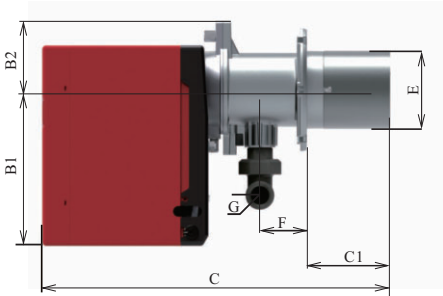

Model	A1	A2	B1	B2	C	C1	E	F	G	I	L	M	N
	mm	mm	mm	mm	mm	mm	Φmm	mm	mm	mm	Φmm	M	Φmm
WS 40 FS10	156	154	204	90	458	110	105	61	Rp314	160	152	11	110
WS 40 FS20	179	177	230	102	509	120	125	67	Rp314	169	171	12	130

Firing Rates

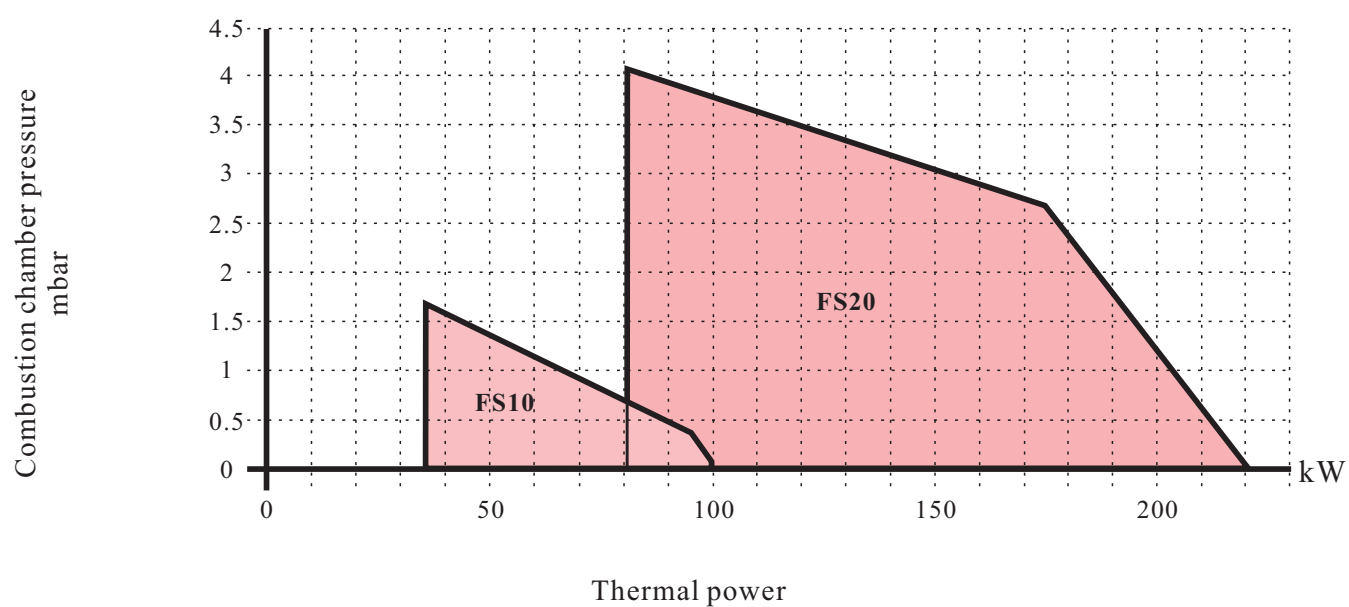

Useful firing rates for choosing the burner

Test condition conforming to en676
Temperature: 20°C
Pressure: 1013.5
Mbar altitude: 0 m a.s.l