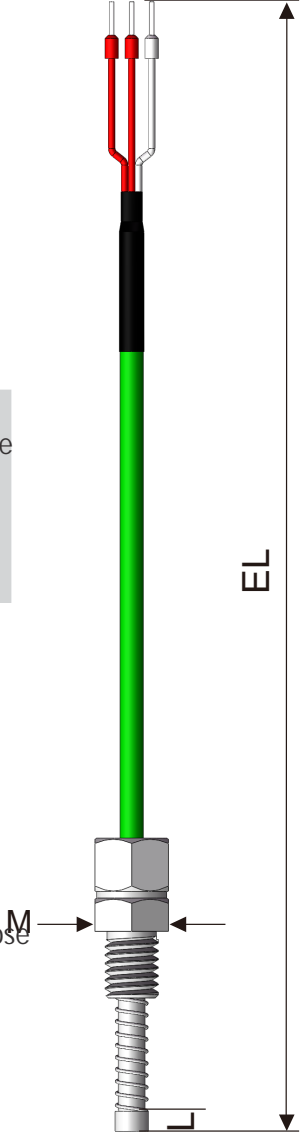


INDUSTRIAL TEMPERATURE SENSOR

16 Spring loaded temperature sensor

A movable screw mounted temperature sensor with tightening threaded mounting, adjustable insertion depth, and can be well close to the temperature measuring point. Used for motor bearings, food machinery, experimental equipment, power molds and other industries.

NO.	Parameters	Specification	Product diagram
1	Index No.	Platinum resistance: pt100, pt1000, pt500, pt200 Thermocouple: K/J/N/E/S/T/R/B Thermistor: 5K, 10K, 100K, 50K, 2.2K DS18B20	
2	Accuracy	Platinum resistance: Class A, Class B, 1/3 Class B Thermocouple: Class I, Class II Thermistor: 1%, 2%, 3% DS18B20: None	
3	Temperature range	Platinum resistance: Specify within -200~850°C range Thermocouple: Specify within -280~1820°C range Thermistor: Specify within -50~300°C range DS18B20: Specify within -55~125°C range	
4	Wiring method	Platinum resistance: T = two-wire system; S = two-wire system; F = four-wire system Thermocouple: None Thermistor: None DS18B20: None	
5	Tail wiring mode	L=bare, U=U terminal, Z=needle terminal, Q=connector O=0 terminal	
6	Anti-bending protection	W = no anti-bending protection; T = spring; R = hose	
7	Cable length EL (mm)	500, 1000, 2000 or specify	
8	Probe diameter D (mm)	2,3,4,5,6,8,10....20 or specify	
9	Probe length L (mm)	10~2000 or specify	
10	Thread Size	M5,M6,M8,M10,M12,M14,M20,or specify	