9dBi 4400-5850MHz Omni Fiberglass Antenna



Cowin Antenna

Electrical Specifications 电性指标

Part Number 料号	**CWBLG4458V9SGN-U**
Frequency Range 频率范围	**4400-5850MHz**
Bandwidth 带宽	**1450**
Peak Gain 峰值增益	**9dBi**
Radiation Direction 辐射方向	**Omnidirectional**
Polarization 极化方式	**Vertical**
Electrical Downtilt 电下倾角	**/**
Half Power Beamwidths 半功率波瓣宽度	**/**
First Upper Sidelobe Suppression 第一上旁瓣抑制	**/**
Front-to-rear ratio 前后比	**/**
Impedance 输入阻抗	**50Ω**
VSWR 电压驻波比	**≤2.5**
Maximum Power 最大功率	**50W**
Lightning Protection 雷电保护	**DC Grounding**

Mechanical Specifications 机械性能	
Connector Type 接头类型	**Rotatable N Male**
Connector Position 接头位置	**Bottom**
Cable type 线材类型	**/**
Antenna Size 天线尺寸	**800*20MM**
Antenna Weight 天线重量	**0.4KG**
Radome Material 外罩材料	**Fiberglass**
Radome Colour 外罩颜色	**Gray**
Mechanically Adjustable Tilt Angle 机械可调倾角	**/**
Temperature Range 温度	**-40-85℃**
Extreme Wind Speed 极限风速	**60m/s**
Pole Diameter 抱杆直径	**35-50MM**
Mounting Method 安装方式	**Pole Mount**
Mounting Model 安装件型号	**2*HXJM004.02/03/Dacromet**
Environmental Standards 环保标准	**ROHS/REACH**

Cowin Antenna

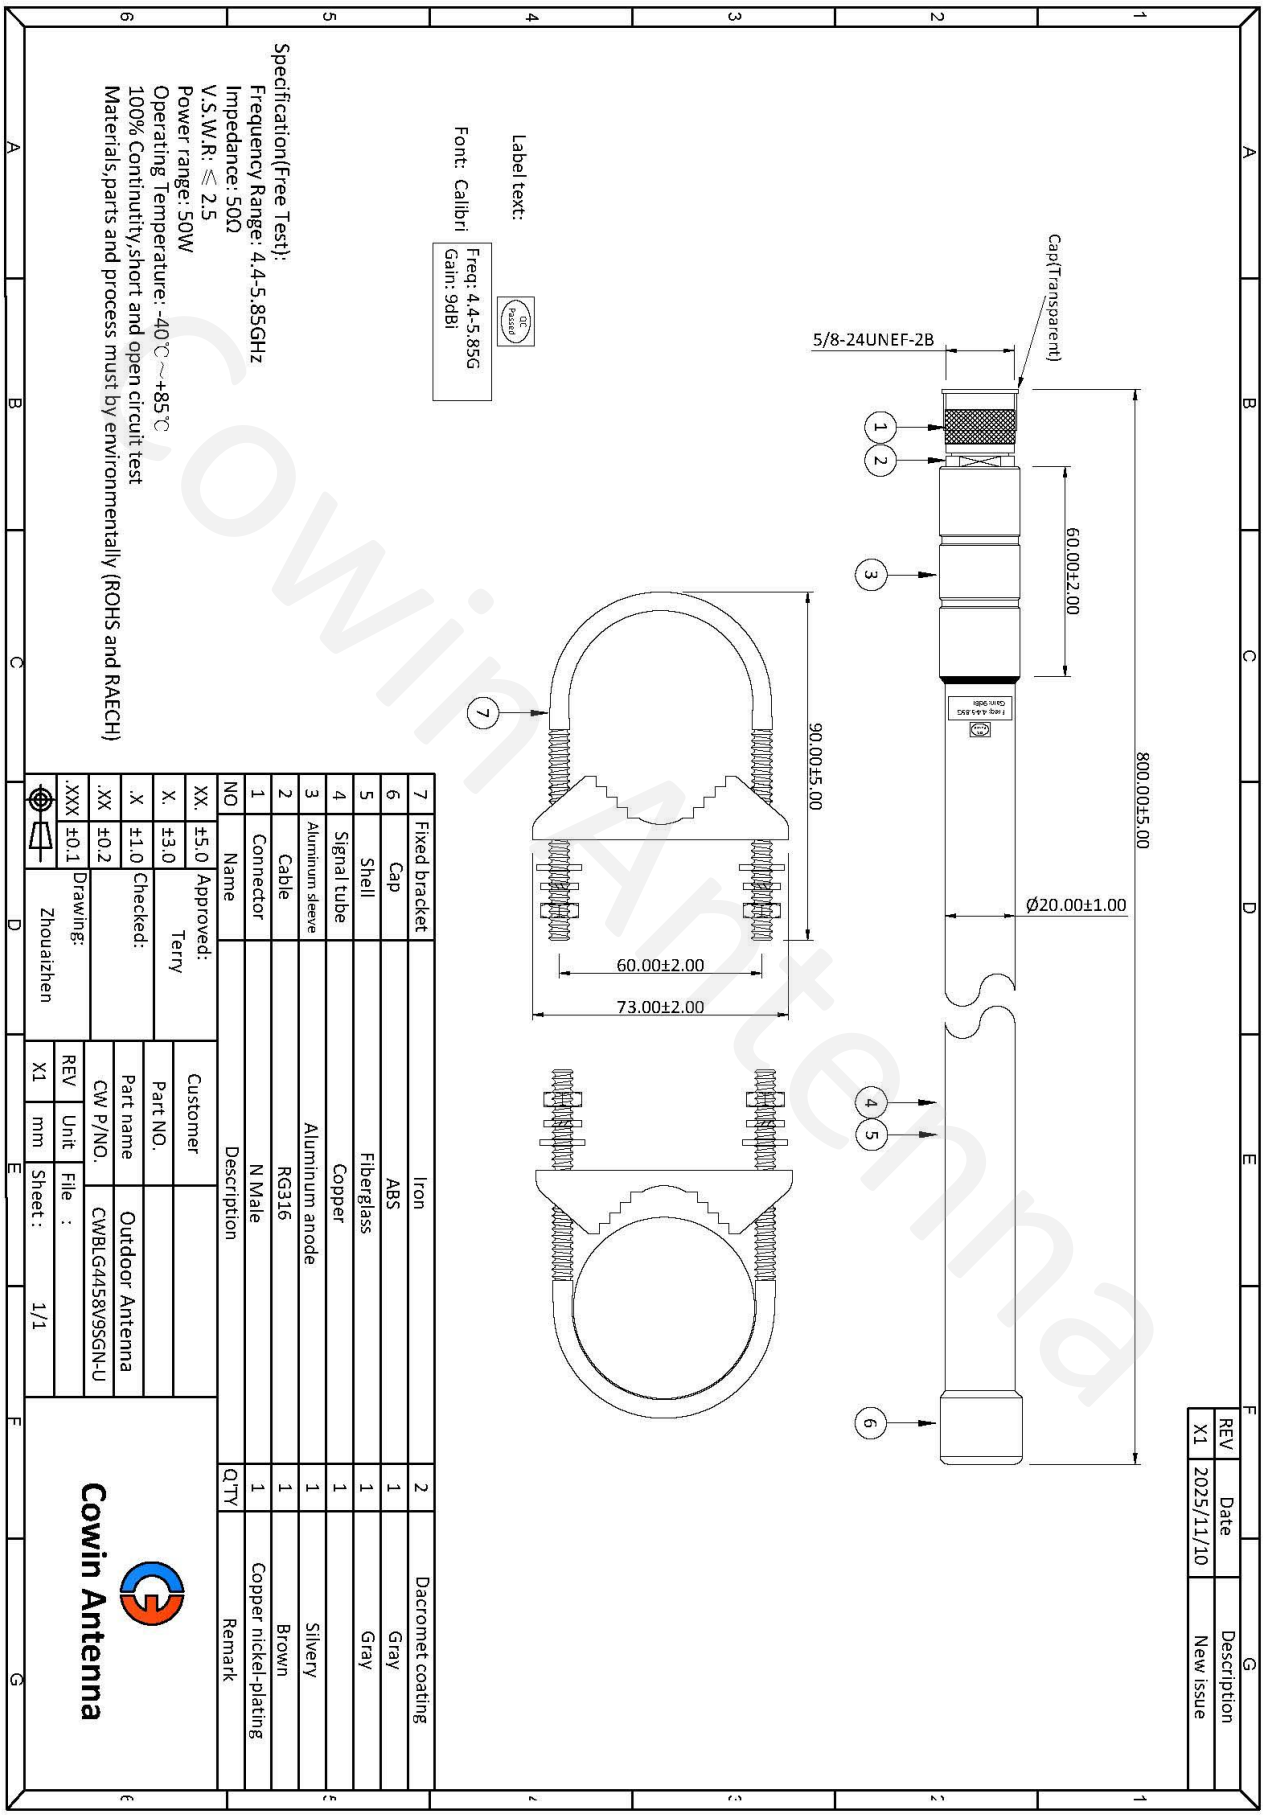

Cowin Antenna

V.S.W.R

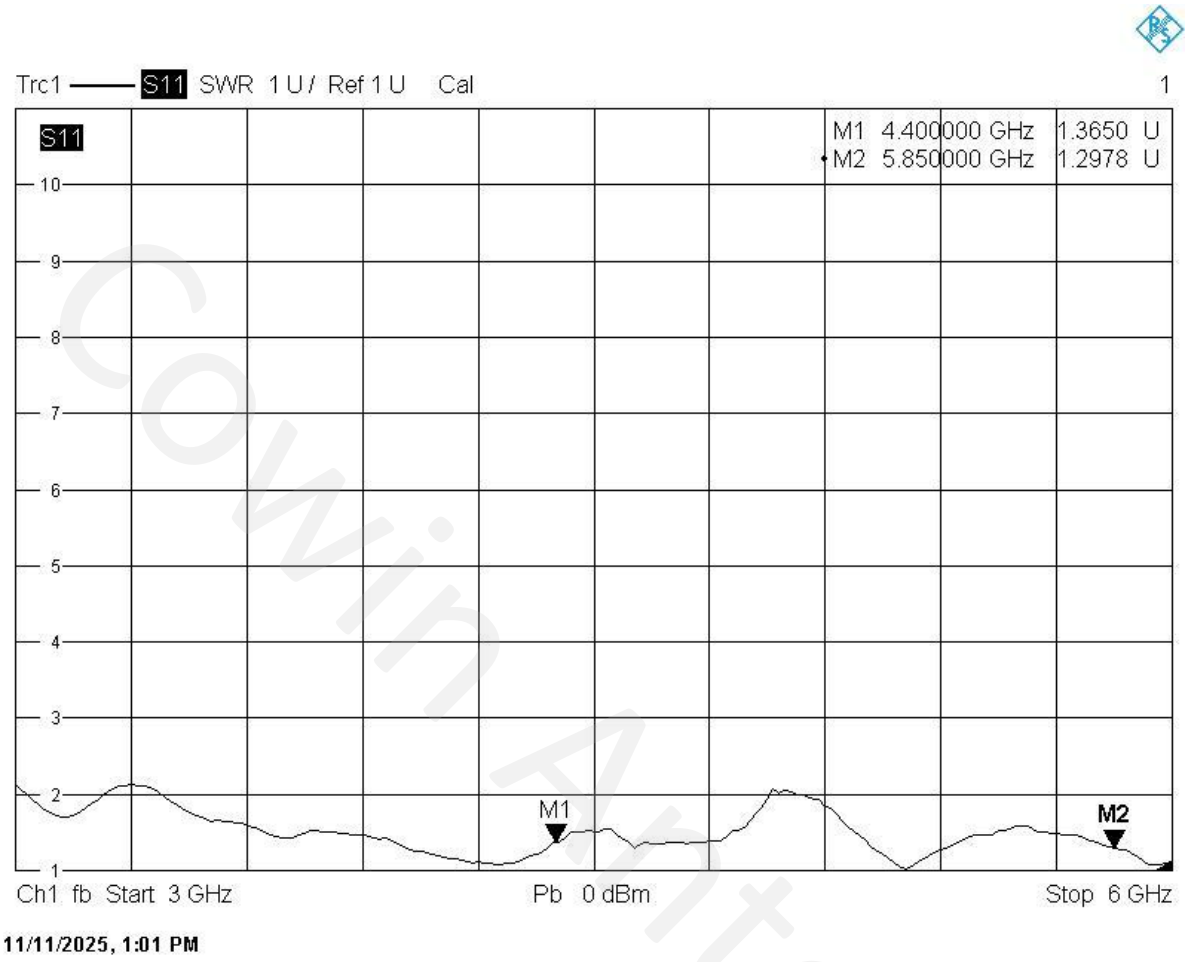

Cowin Antenna

Efficiency

Frequency (MHz)	Efficiency (%)
4400	60.35
5125	60.95
5850	61.25

Cowin Antenna

Peak Gain

Frequency (MHz)	Max Gain (dBi)
4400	8.77
5125	8.62
5850	8.54

Cowin Antenna

2D Radiation Patterns

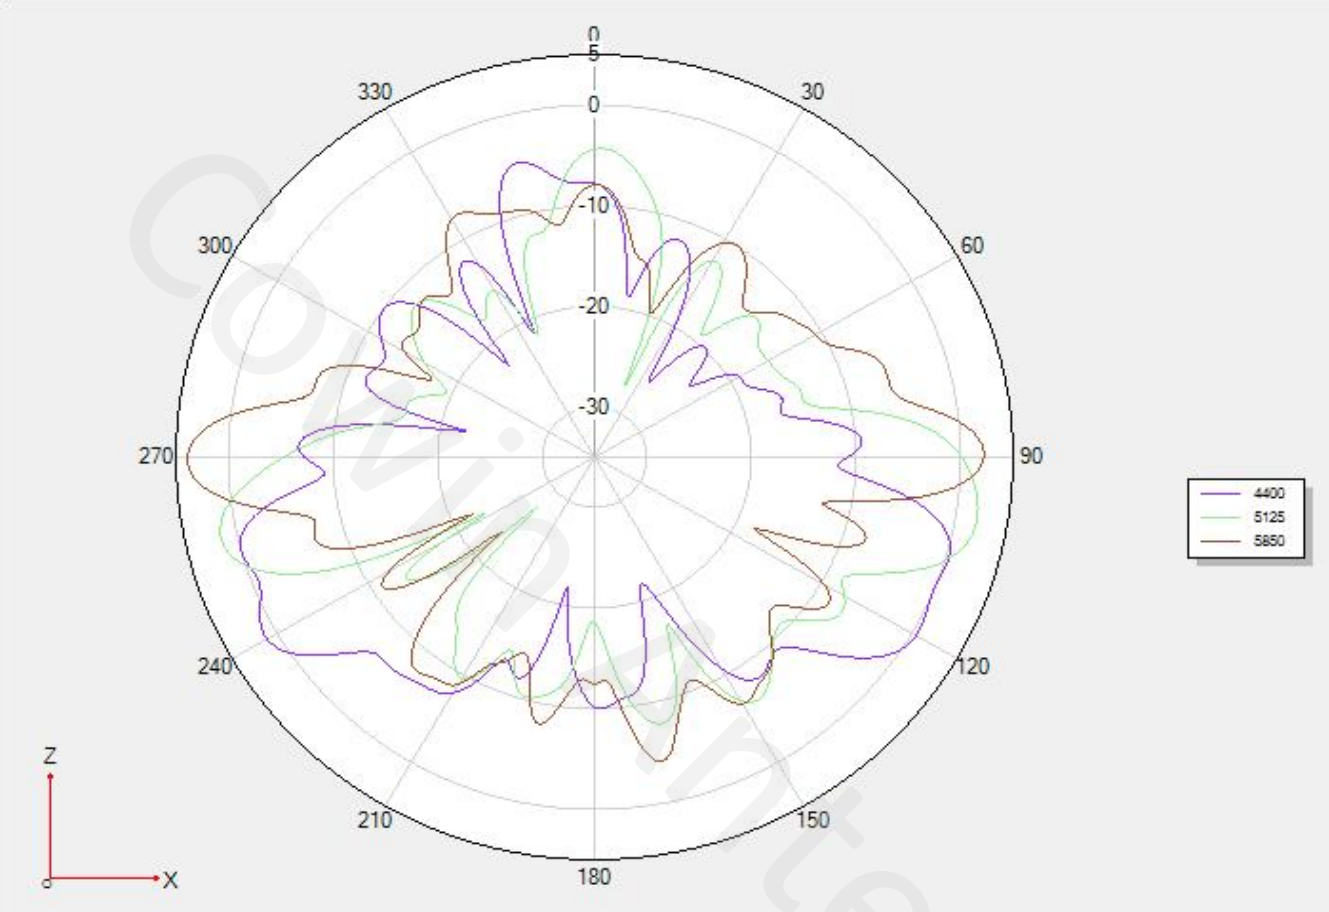

Cowinantenna

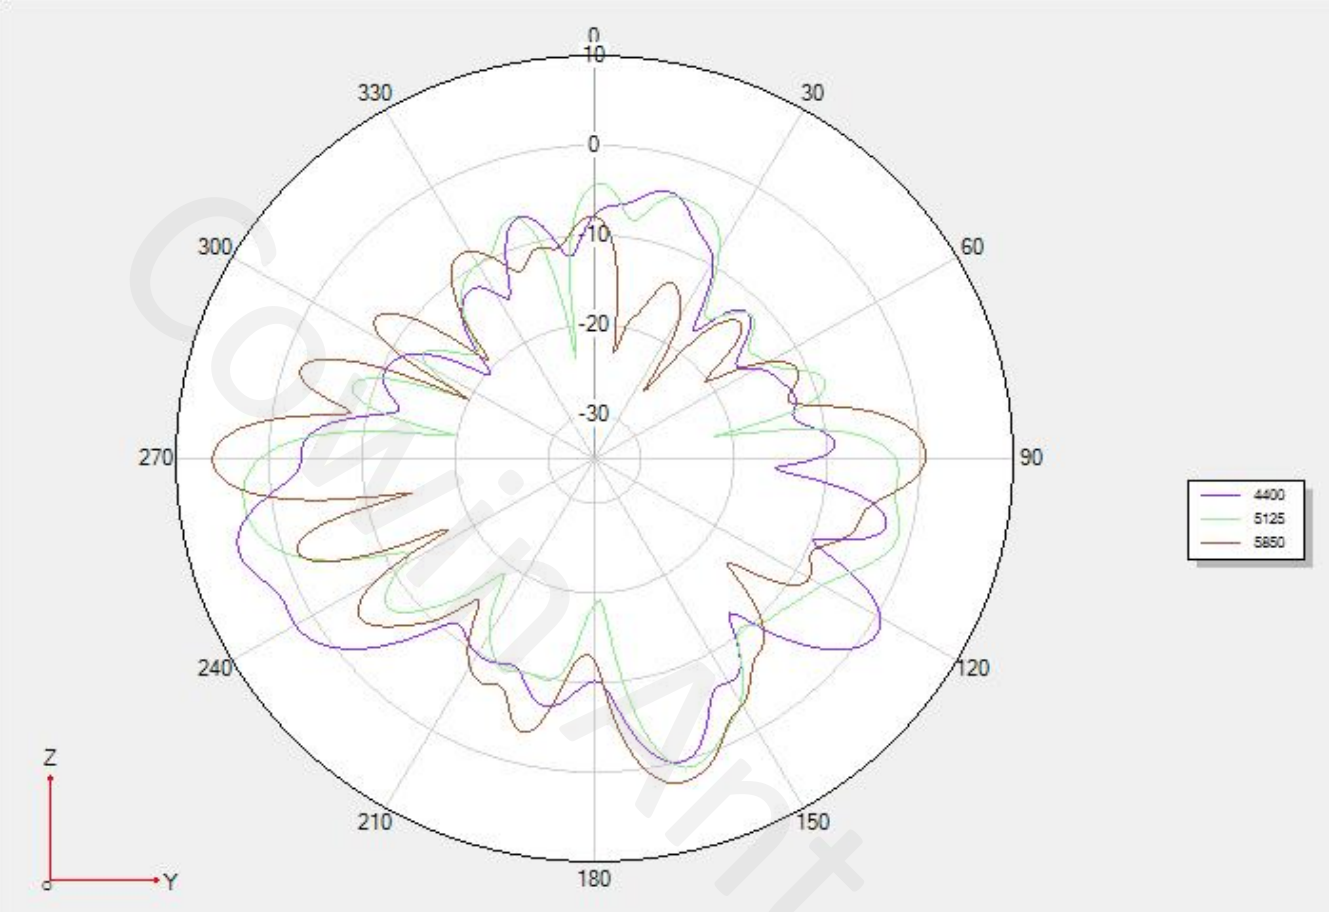

Cowinantenna

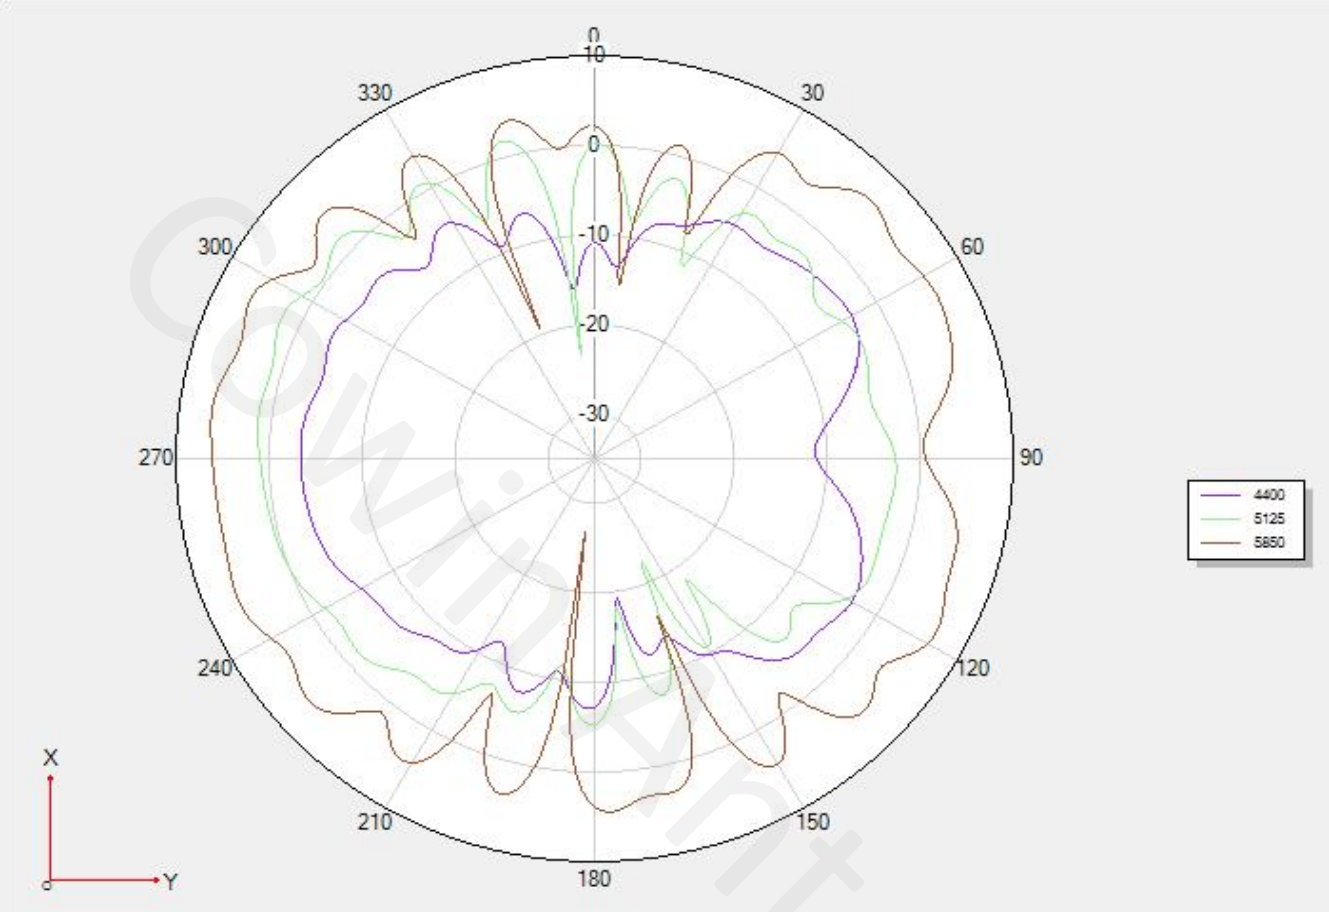

Cowin Antenna