


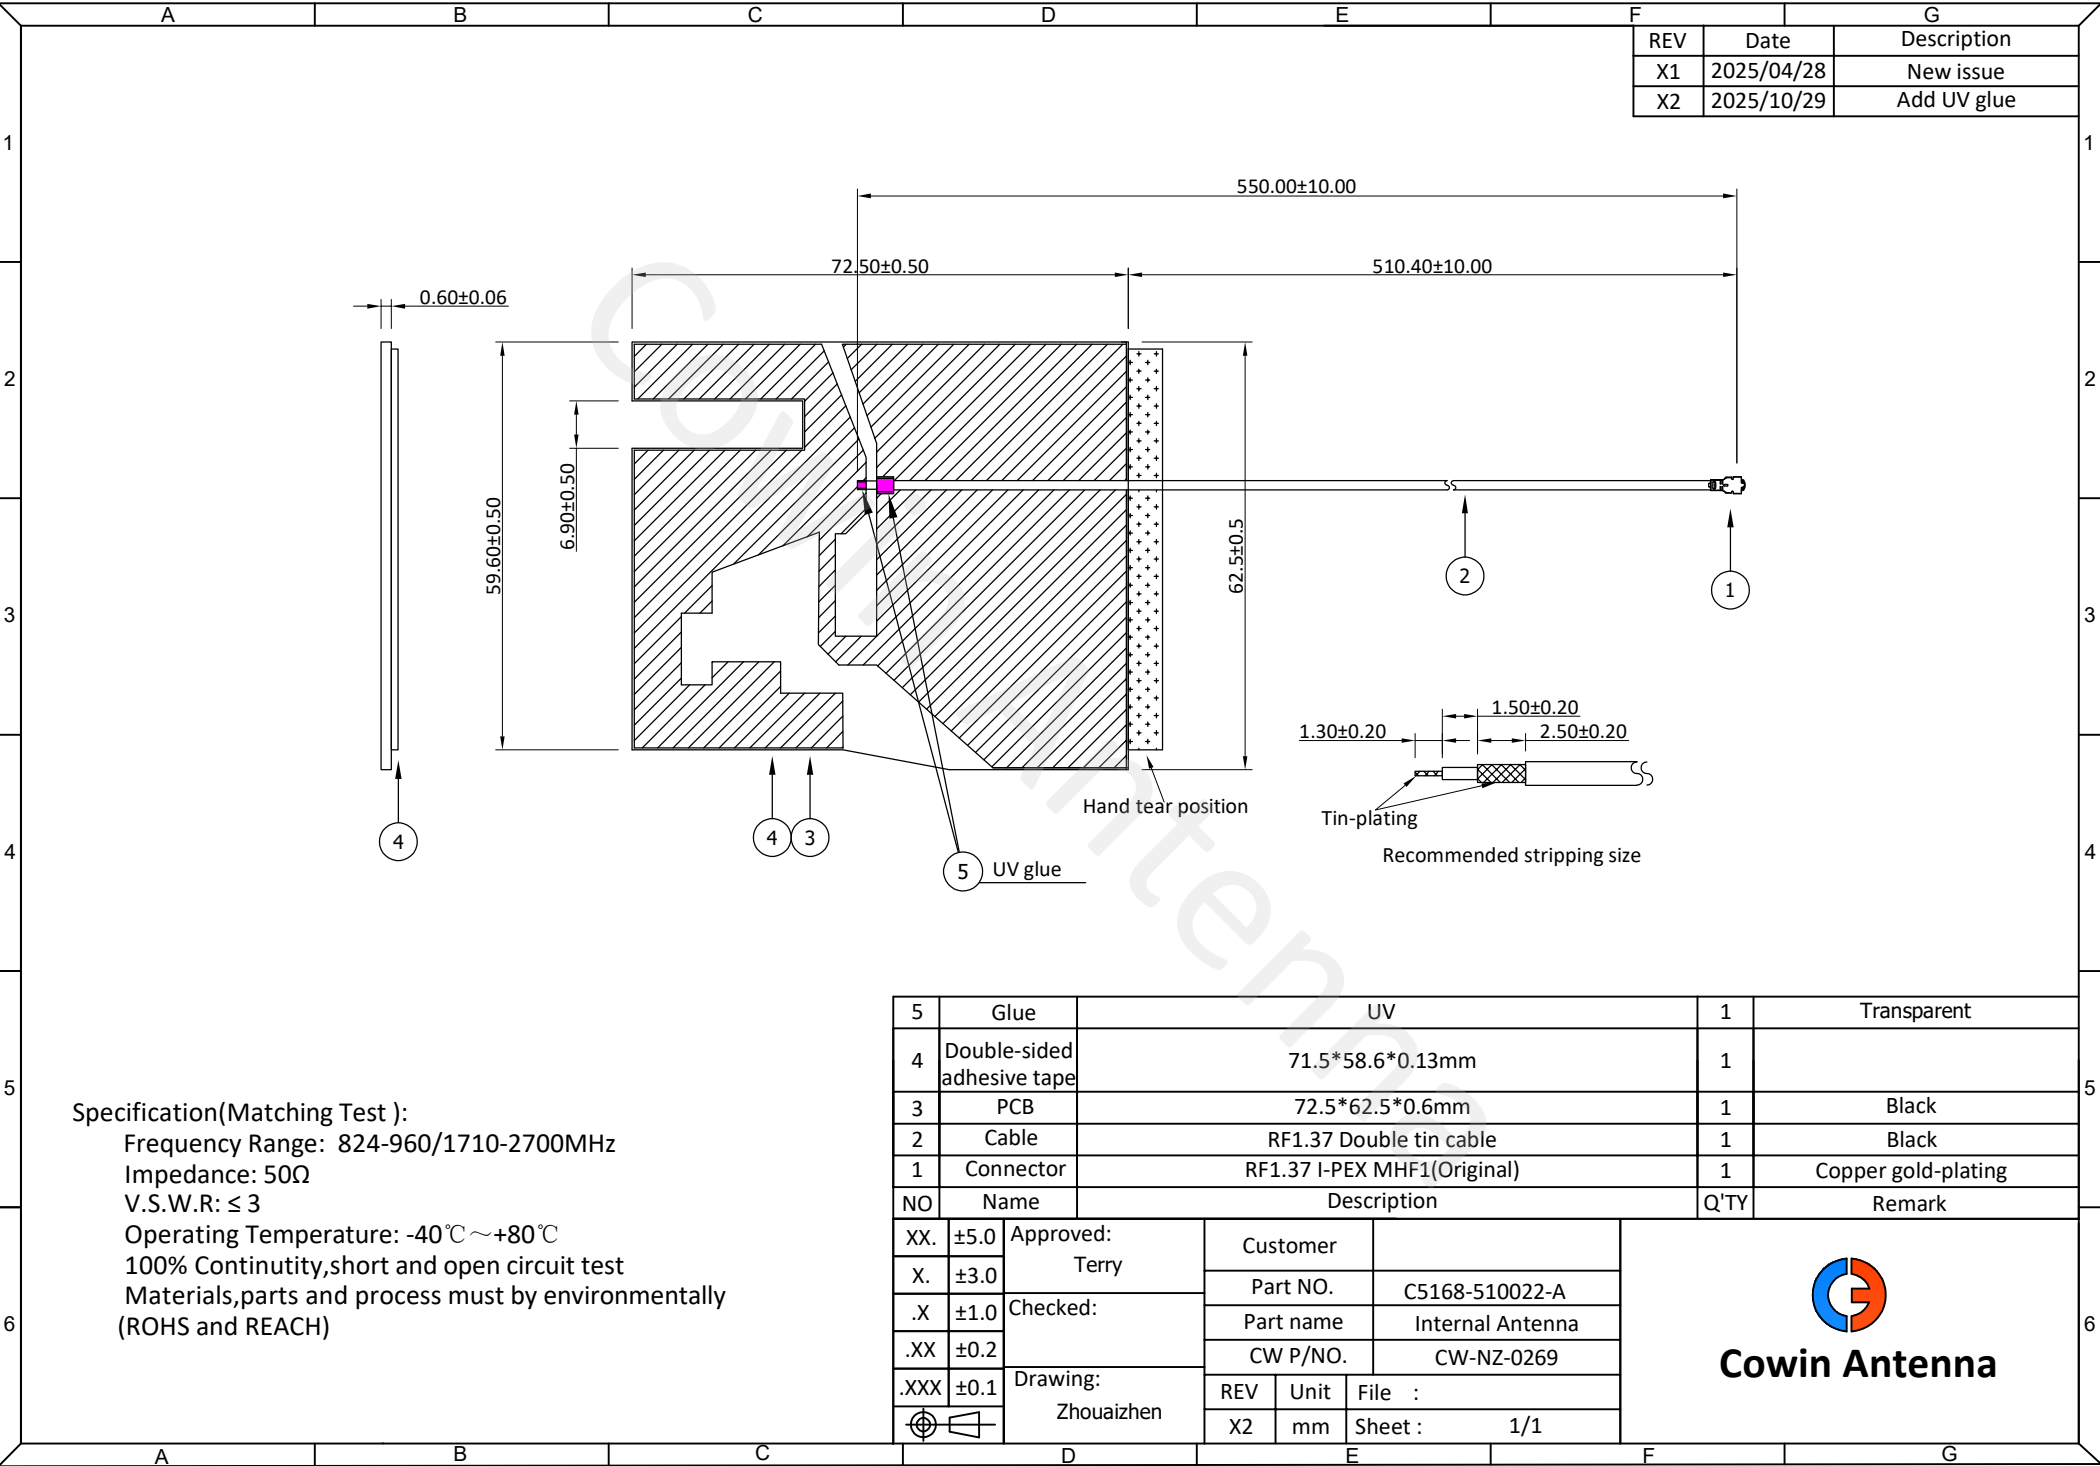

REV	Date	Description
X1	2025/04/28	New issue
X2	2025/10/29	Add UV glue

Specification(Matching Test):
Frequency Range: 824-960/1710-2700MHz
Impedance: 50Ω
V.S.W.R: ≤ 3
Operating Temperature: -40℃~+80℃
100% Continuity,short and open circuit test
Materials,parts and process must by environmentally
(ROHS and REACH)

5	Glue	UV	1	Transparent
4	Double-sided adhesive tape	71.5*58.6*0.13mm	1	
3	PCB	72.5*62.5*0.6mm	1	Black
2	Cable	RF1.37 Double tin cable	1	Black
1	Connector	RF1.37 I-PEX MHF1(Original)	1	Copper gold-plating
NO	Name	Description	Q'TY	Remark
XX.	±5.0	Approved:	 Cowin Antenna	
X.	±3.0	Terry		
.X	±1.0	Checked:		
.XX	±0.2			
.XXX	±0.1	Drawing:		
		Zhouaizhen		
		Customer	Part NO. C5168-510022-A Part name Internal Antenna CW P/NO. CW-NZ-0269	
		REV	Unit	File :
		X2	mm	Sheet : 1/1