
Coupler System

- AAR approved couplers, yokes, and E and F-M216 knuckles
- Castings are 100% hardness tested, gaged, MPI inspected, fit and operated to ensure quality
- Available as individual coupler bodies or completely assembled fits



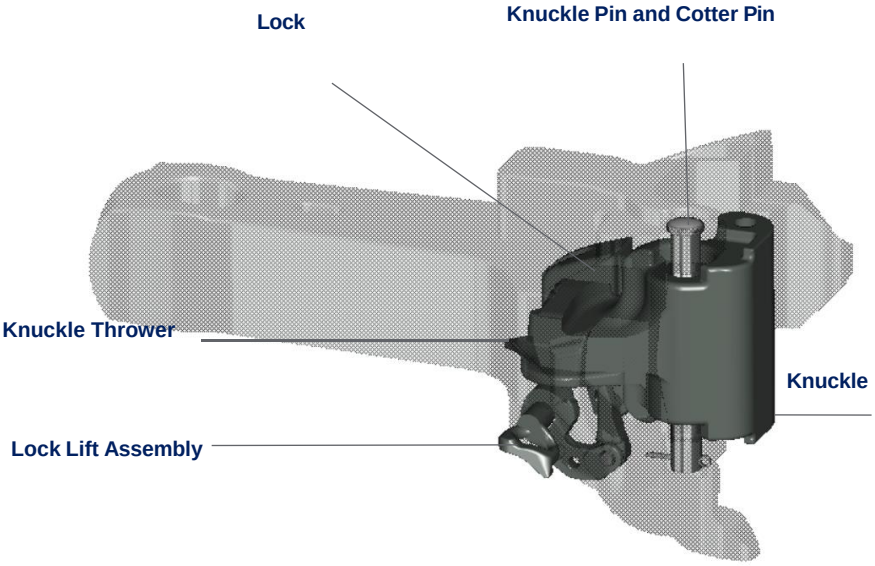

Type	AAR E Type Coupler Body		
			
Model#	E60EE	SBE60EE	SE60EE
Shank Length	21.5"	21.5"	21.5"
Shelf Configuration	None	Bottom	Top & Bottom

Type	AAR E/F Type Coupler Body
	
Model#	SBE68DE
Shank Length	31"
Shelf Configuration	Bottom

Type	AAR F Type Coupler Body		AAR F Type Rotary Coupler Body
			
Model#	F70DE	SF70DE	FR210E
Shank Length	17.25"	17.25"	17.125"
Shelf Configuration	Bottom	Top & Bottom	Bottom
			Interchangeable with FR207E & FR209E rotary couplers

Coupler Operating Parts



E50BEV



F51AEV

- M216 E and F knuckles



Knuckle Throwers



Locks



Lock Lifters



C10 Y47 AAR S-121 E

Coupler Connection Pins

Yokes



SY40AE – Type E



Y45AE – Type F



RY210E – Rotary

Followers



Y44A – Type E



Y46AE – Type F



RF210 – Rotary

Part Name	AAR E & E/F	AAR F	Rotary
Knuckles	E50BEV	F51AEV	F51AEV
Locks	E42BE	F41AE	F400AE
Lifters	E24B	F7, F8A	RLL
Throwers	E30A	F31A	F31A
Yokes	SY40AE	Y45AE	RY210E
Followers	Y44A	Y46AE	RF210