Draft gears

- CRCC approved draft gears
- Castings and springs are 100% hardness tested, gaged, MPI inspected, fit and operated to ensure quality



Model #	MT-3	MT-2	HM-1
Maximum resistance force	≤2.0 MN	≤2.27 MN	≤2.45 MN
Rated capacity	≥45 kJ	≥50 kJ	≥80 kJ
Travel	≤83 mm	≤83 mm	≤83 mm
Energy absorption ratio	≥80%		
Initial force	≤250 kN		
Rated impact speed	≥7 km/h	≥7 km/h	≥9.5 km/h
Overall dimensions (including follower)	Standard pocket; length ≥625 mm, width ≤322 mm, height ≤234 mm 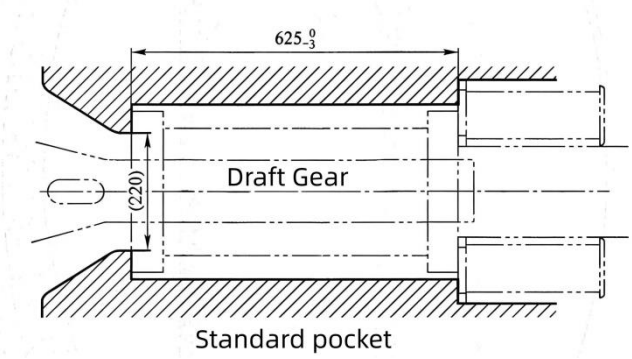		
Applicable standard	·TB/T 1961		