

双龙集团有限公司

上海 | 总部
地址: 上海市嘉定区南翔工业开发区德力西路299号
电话: 0086-21-69178818 / 69178808 / 69178817

北京 | 办事处
地址: 北京朝阳区东四环华腾国际3号楼9B
电话: 010-87952663

广州 | 办事处
地址: 广州市广州大道南金穗雅园B1栋402室
电话: 020-89000670

SHUANGLONG GROUP CO., LTD.

Shanghai (Headquarters)
Address: No. 299, Delixi Rd., Jiading District, Shanghai
Tel: 0086-21-69178818 / 69178808 / 69178817

Beijing (Office)
Address: Beijing chaoyang district east fourth ring
hua teng international 3 floor 9 b
Tel: 010-87952663

Guangzhou (Office)
Address: Guangzhou guangzhou avenue south
Jin Sui graceland in B1 building, room 402
Tel: 020-89000670

Further products-更多产品, 详见官网www.shuanglong.com



* 因发展需要, 本公司保留设备规格、外形、配置变更的权利(资料如有不符, 以实物为准)。
* 本资料中图片和数据归我公司所有, 未经允许, 任何公司和个人不得使用, 否则, 追究其法律责任。




双龙集团官方微信



双龙集团官方网站

干混砂浆搅拌主机
Dry Mortar Mixer

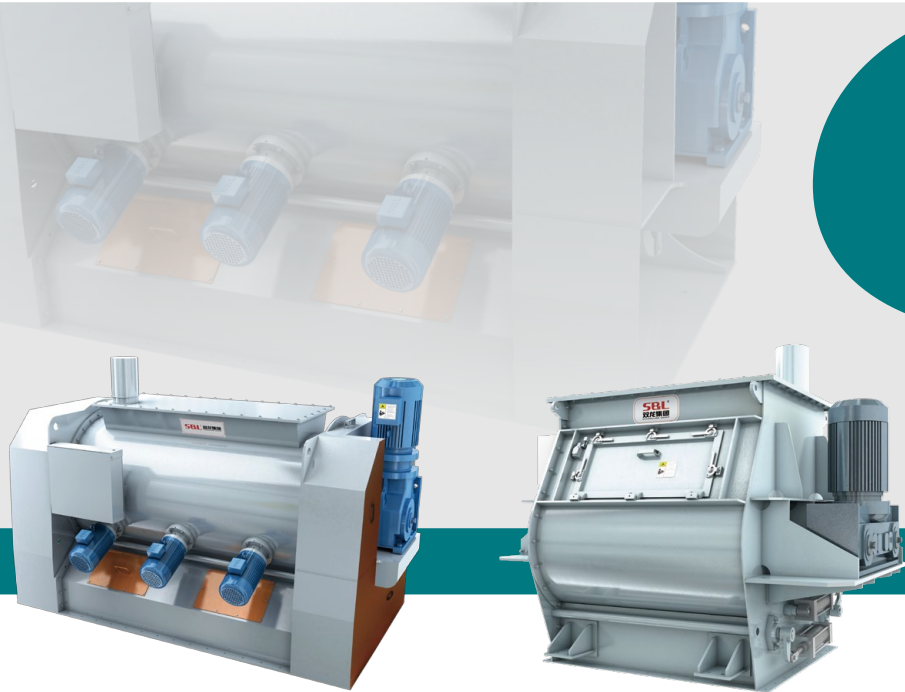

LDH-S系列 高速犁刀式混合机
HIGH PLOUGHSHARE MIXER

- 高速犁刀式混合机是根据我公司长期生产经验, 结合国外先进技术推出的犁刀式混合机改进后的新机型。
- 耐磨材料制成的搅拌件、飞刀、筒体, 延长了这些部件的使用寿命。
- 可靠的宽大形气动大开门出料形式, 极大缩短了出料时间, 最大限度减少残留。
- 在每分钟120转左右的主轴和每分钟2800转的飞刀共同作用下, 在极短的时间内达到均匀混合的目的。
- 此种机型广泛用于建材、特种砂浆、地坪、墙面涂料等行业。

- High Plough Share Mixer is a new developed model from our many years' mfg. experience and overseas advanced technology.
- Wear-resistant materials are used to fabricate the agitator, chopper and vessel to prolong their service life.
- Reliable pneumatic operated bomb door for discharge system can shorten the discharge time and avoid residues.
- The homogeneity can be achieved within an extremely short time because of main shaft @ 120rpm and chopper @ 2800 rpm.
- This kind of mixer can be applied into many industries such as building materials, special mortars, floor coatings, wall coatings and etc.

参数表 | Data Table

型号 Model	全容积 Total Volume (M³)	装载量 Loading Factor (kg)	搅拌时间 Mixing Time (s)	设备理论净重量 (kg)	搅拌功率 Power (KW)	飞刀数量 Chopper Qty (套)
LDHS-1	1	600~900	90~150	2200	18.5+4×2	2
LDHS-1.5	1.5	900~1200	90~150	2500	22+4×3	3
LDHS-2	2	1200~1600	90~150	3000	30+4×3	3
LDHS-3	3	1600~2300	90~150	3700	37+4×3	3
LDHS-4	4	2300~3200	90~150	5000	45+4×4	4
LDHS-6	6	3200~4700	90~150	7000	55+4×4	4

注: 上表参数会随被混合物料特性不同而有所变化。
Note: The above parameters vary depending on the characteristics of the mixed material.



高速耐磨飞刀
Wear-resistant high-speed chopper
延长部件的使用寿命
Prolong service life




平衡组合密封
Counter-balanced air purge seal
确保主轴可靠的密封性
Ensure reliable seal for main shaft




出料回气口
Air return port
排出成品料仓内的气体
Release air from finished product silo



密封可靠的大开门出料口
Bomb door for discharge system with reliable seal
快速出料且无余料
Make fast discharge and no residues

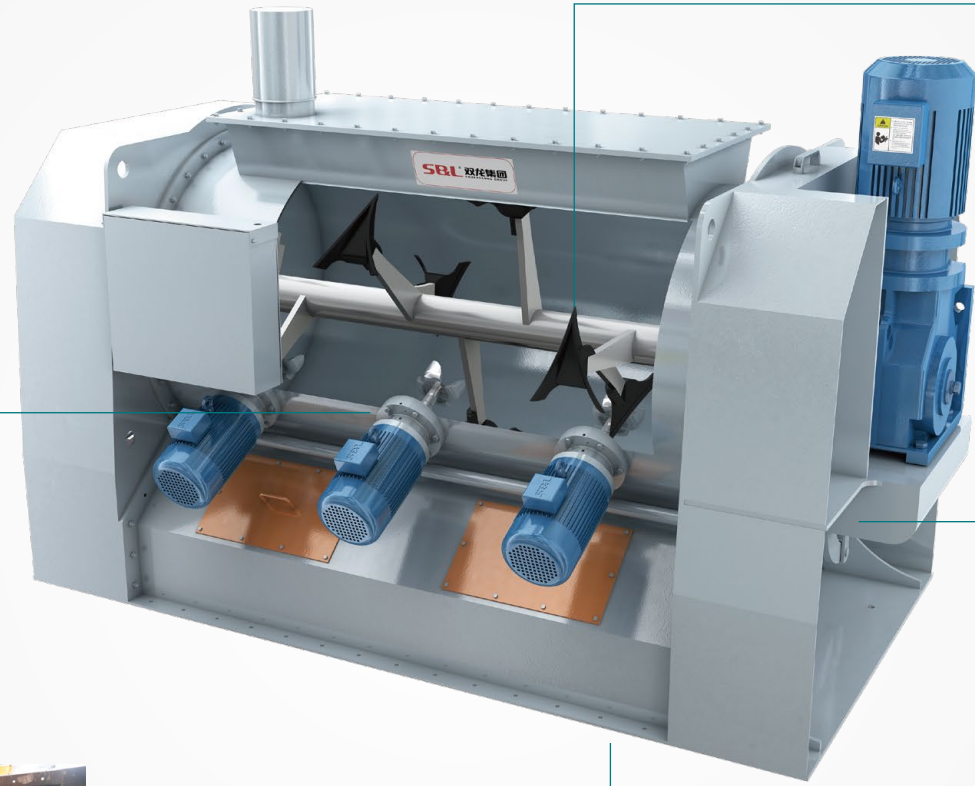

耐磨犁头
Wear-resistant plowshare
延长部件的使用寿命
Prolong service life

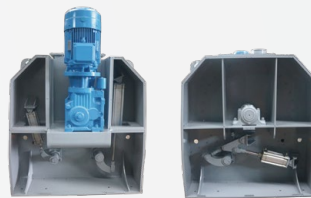

气动出料连杆
Auxiliary rod for pneumatic discharge system
停电后出料门不会打开
Ensure no open for bomb door if power failure



安全便捷的清理口
Cleaningout port with safe and easy access
打开清理口时设备不能运转
Stop machine once the port is open