

165 Emergency Exit Sign Box

Model: X165ZY220L033V6-10C

Emergency Lighting

- Constant brightness control for both AC and DC operations
- Battery protection, automatic shutdown with deep discharge.
- Function indicator:
Red light indicates charging, green light;
indicates fully charged.



Product Data

General Information

Light Source 6000K LED

Electrical Parameters

Input Voltage 220-240VAC

Frequency 50/60Hz

Input Current (When Fully Charged) AC220V : 0.021A AC240V: 0.026A

Switching Time <0.1Sec

Total Power (When Fully Charged) AC220V : 4.0W AC240V: 5.4W

Factor >0.8PF

AC Surface Brightness >100cd/m²

Emergency Function

DC Working Mode 3.0-4.1V,112-288mA

Battery Specifications Ni-CD 3.6V/ 3*AA600mAh

Charging Time 24 Hours

Emergency Duration 2 Hours

DC Surface Brightness >100cd/m²

Shutdown Voltage 2.95V

Low Voltage Conversion 134-155AC

Temperature

Ambient Temperature 0-50°C

Machinery & Enclosures

Housing Material Powder-coated steel

Color White

Plate Material Acrylic (PMMA)

Overall Length (mm) 168

Overall Width (mm) 53

Overall Height (mm) 192

Box Size (LxWxH) 165x51x190mm

Cover Size (LxWxH) 168x12x192mm

Exposed Dimensions of Plate (LxWxH) 135x150mm

Plate Size (LxWxH) 140x180x8mm

Approvals & Applications

IP rating IP20

Certification Depends on needs

Initial Performance

Brightness Deviation +/-10%

Power Consumption Deviation +/-10%

Product Information

Product Model X165ZY220L033V6-10C

Net Weight 1.03 Kg

Inner Box Size (mm) 175x60x200

Number Of Inner Boxes 1 PCS

Outer Carton Size (mm) 385x335x230

Quantity Of Outer Carton 10 PCS




165 Emergency Exit Sign Box

Model: X165ZY220L033V6-10C

Emergency Lighting

Two-Dimensional Diagrams

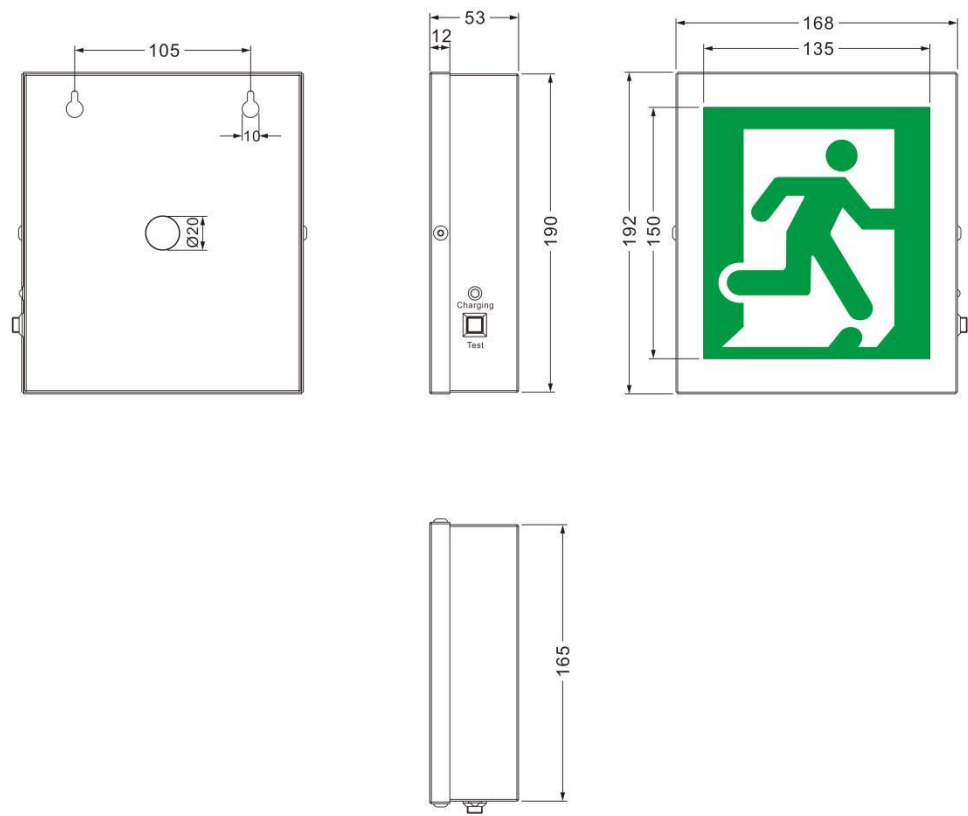

Pattern :

It can be customized according to customer needs



165 Emergency Exit Sign Box

Model: X165ZY220L033V6-10C

Emergency Lighting

Schematic Diagram Of The Main Components :

