


165 Surface Mounted Emergency Exit Sign

Model: P220ZY220L033V6-10C

Exit Sign

- Constant brightness control for both AC and DC operations
- Battery protection, automatic shutdown with deep discharge
- Function indicator:
Red light indicates charging, green light; indicates fully charged

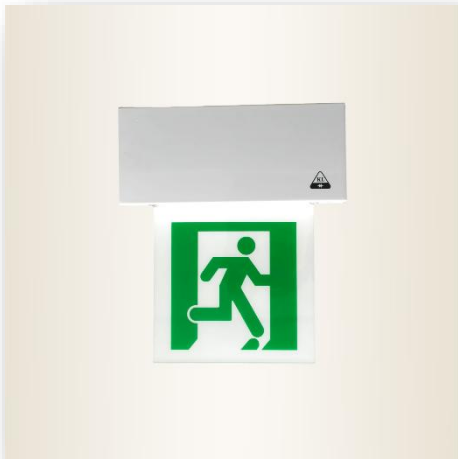

Product Data

General Information

Light Source	6000K LED
--------------	-----------

Electrical Parameters

Input Voltage	220-240VAC	
Frequency	50/60Hz	
Input Current (When Fully Charged)	AC220V: 0.021A	AC240V: 0.026A
Switching Time	<0.1Sec	
Total Power (When Fully Charged)	AC220V: 3.9W	AC240V: 5.1W
Factor	>0.8PF	
Ac Surface Brightness	>100cd/m ²	

Emergency Function

DC Working Mode	3.0-4.1V,112-278mA
Battery Specifications	Ni-CD 3.6V/ 3*AA600mAh
Charging Time	24 Hours
Emergency Duration	2 Hours
DC Surface Brightness	>100cd/m ²
Shutdown Voltage	2.95V
Low Voltage Conversion	134-155AC

Temperature

Ambient Temperature	0-50°C
---------------------	--------

Machinery & Enclosures

Housing Material	Powder-coated steel
Color	White
Plate Material	Acrylic (PMMA)
Overall Length (mm)	220
Overall Width (mm)	65
Overall Height (mm)	255

Box size (LxWxH)	220x65x95mm
Exposed Dimensions of Plate (LxWxH)	160x160x8mm

Approvals & Applications

IP rating	IP20
Certification	Depends on needs

Initial Performance

Brightness Deviation	+/-10%
Power Consumption Deviation	+/-10%

Product Information

Product Model	P220ZY220L033V6-10C
Net Weight	1.19 Kg
Inner Box Size (mm)	225x70x260
Number Of Inner Boxes	1 PCS
Outer Carton Size (mm)	550x385x245
Quantity Of Outer Carton	10 PCS




165 Surface Mounted Emergency Exit Sign

Model: P220ZY220L033V6-10C

Exit Sign

Two-Dimensional Diagrams:

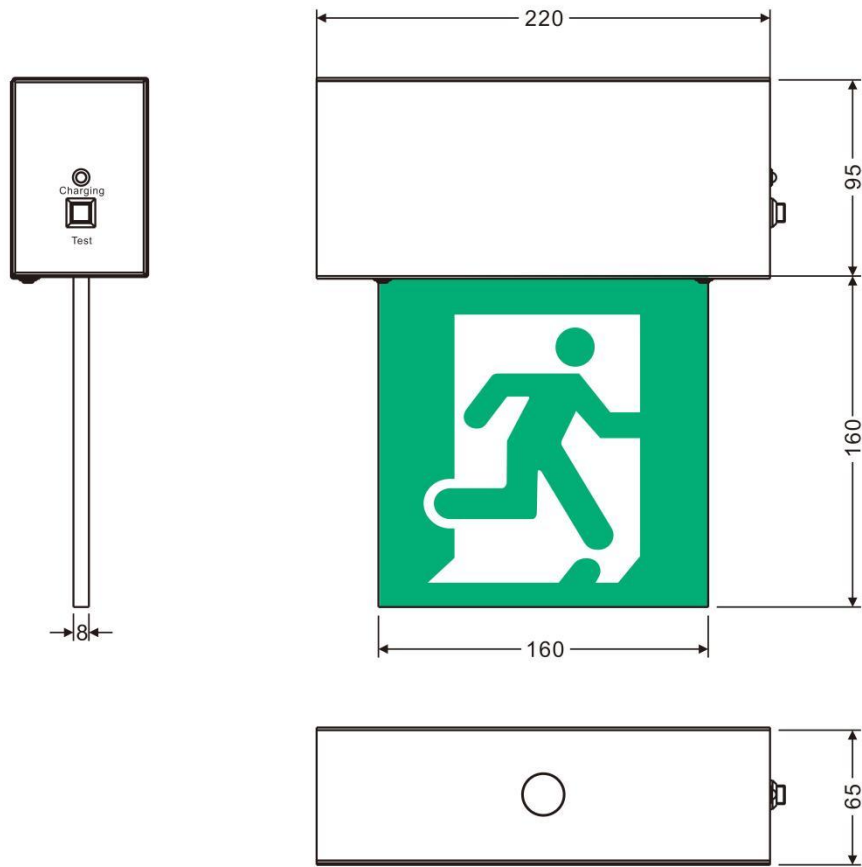

Pattern:

It can be customized according to customer needs



165 Surface Mounted Emergency Exit Sign

Model: P220ZY220L033V6-10C

Exit Sign

Schematic Diagram Of The Main Components :

