

370 Bulkhead Type LED Luminaries

Model: C370Z220L10、 C370Z220L20

Bulkhead Series

The 370 surface mounted single lighting rectangular light is a versatile, maintenance-free, low-energy LED luminaire that can be used for all-day lighting. With its high-power LED lamps, optimized die-cast aluminum housing and diffuser design, it provides high-quality and reliable lighting for public corridors, staircases, industrial areas and underpasses. Equipped with intelligent brightness adjustment, it is more efficient, reliable and durable than traditional compact fluorescent lamps, resulting in a more convenient user experience.



Product Data

General Information

Light Source 4000K LED

Electrical Parameters

Input Voltage 220-240VAC

Frequency 50/60Hz

Input Current 0.05A 0.095A

Input Power 10W 20W

Factor ≥0.9PF

Optical Parameters

Luminous Flux >1000lm >1800lm

Temperature 4000K

Displays Index 80

Beam Angle 120°

Light Effect >100lm/W >90lm/W

Dimming Function 7 steps (40%,60%,70%,80%,90%,100%)

Conditions Of Use

Ambient Temperature -40℃~50℃

Operating Humidity 10-98%

Life Span >50000H

Machinery & Enclosures

Housing Material Powder-painted die-cast aluminum

Color White

Lampshade Material Flame retardant V0 PC

Overall Length (mm) 370

Overall Width (mm) 115

Overall Height (mm) 94

Mounting Hole Size (mm) 342 x 60

Approvals & Applications

IP rating IP54

Certification Depends on needs

Surge Immunity Level 4KV

Initial Performance

Brightness Deviation +/-10%

Power Consumption Deviation +/-10%

Product Information

Product Model 10W: C370Z220L10
20W: C370Z220L20

Net Weight 1.36 Kg

Inner Box Size (mm) 375x120x100

Number Of Inner Boxes 1 PCS

Outer Carton Size (mm) 635x400x230

Quantity Of Outer Carton 10 PCS




370 Bulkhead Type LED Luminaries

Model: C370Z220L10、C370Z220L20

Bulkhead Series

Two-Dimensional Diagrams:

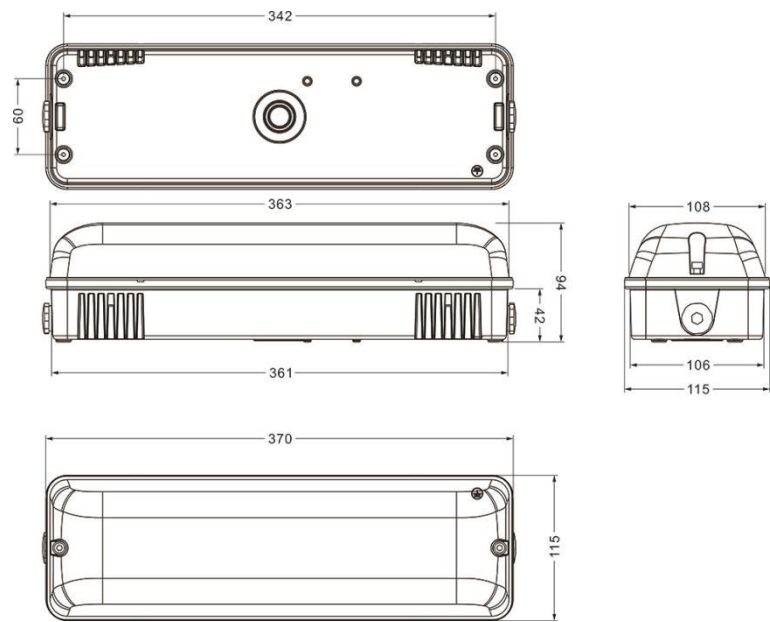

Schematic Diagram Of The Main Components :

