

370 Plastic Bulkhead Type LED Luminaries

Model: C370Z220L16-S

Bulkhead Series

This is a PC plastic shell, IP65 protection level three proof wall mounted LED lamp, widely used in outdoor courtyards, balconies, public corridors, stairs, industrial areas and other places.



Product Data

General Information

Light Source LED

Electrical Parameters

Input Voltage 220-240VAC

Frequency 50/60Hz

Input Current 0.14A

Input Power 16W

Factor $\geq 0.5PF$

Optical Parameters

Luminous Flux $>1800lm$

Temperature 4000K/6000K

Displays Index 80

Beam Angle 120°

Light Effect $>90lm/W$

Conditions Of Use

Ambient Temperature $-40^{\circ}C \sim 50^{\circ}C$

Operating Humidity 10-98%

Life Span $>50000H$

Machinery & Enclosures

Housing Material Flame retardant V0 PC

Color white

Lampshade Material Flame retardant V0 PC

Overall Length (mm) 370

Overall Width (mm) 115

Overall Height (mm) 95

Approvals & Applications

IP rating IP65

Certification Depends on needs

Initial Performance

Brightness Deviation $\pm 10\%$

Power Consumption Deviation $\pm 10\%$

Product Information

Product Model C370Z220L16-S

Net Weight 0.52 Kg

Inner Box Size (mm) 375x120x100

Number Of Inner Boxes 1 PCS

Outer Carton Size (mm) 635x400x230

Quantity Of Outer Carton 10 PCS




370 Plastic Bulkhead Type LED Luminaries

Model: C370Z220L16-S

Bulkhead Series

Two-Dimensional Diagrams :

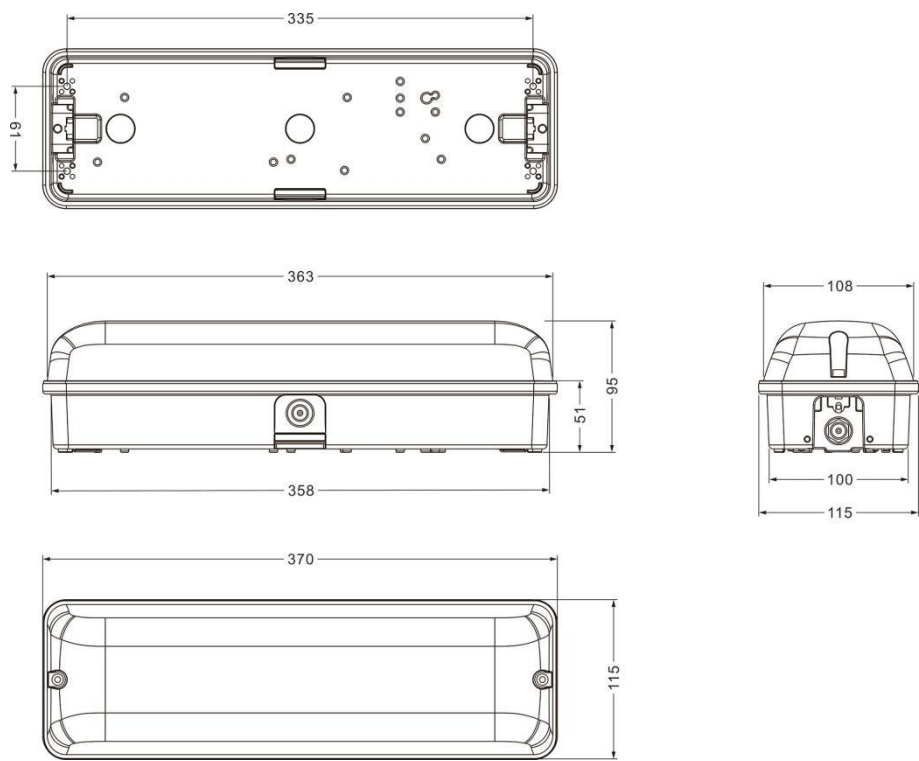

Schematic Diagram Of The Main Components :

