



P110-3


Optional Alternator

Output Ratings

Voltage, Frequency		Prime	Standby
400/230 V, 50 Hz	kVA	100	110
	kW	80	88
480/277V, 60 Hz	kVA	113	125
	kW	90.4	100



Ratings at 0.8 power factor.
Please refer to the output ratings technical data section for specific generator set outputs per voltage.

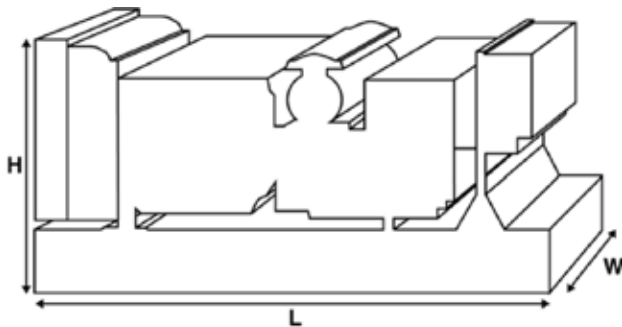

Dimensions and Weights

Length	mm	1980 (78)
Width	mm	890 (35)
Height	mm	1374 (54.1)
Weight (Dry)	kg	1055 (2326)
Weight (Wet)	kg	1073 (2366)

Ratings in accordance with ISO 8528, ISO 3046, IEC 60034, BS5000 and NEMA MG-1.22.
Generator set pictured may include optional accessories.

Prime Rating

These ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.

Standby Rating

These ratings are applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings. The alternator on this model is peak continuous rated (as defined in ISO 8528-3).

Standard Reference Conditions

Note: Standard reference conditions 25°C (77°F) Air Inlet Temp, 100m (328 ft) A.S.L. 30% relative humidity.
Fuel consumption data at full load with diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998, Class A2.

FG Wilson offer a range of optional features to allow you to tailor our generator sets to meet your power needs.
Options available include:

- Upgrade to CE Certification
- A wide range of Sound Attenuated Enclosures
- A variety of generator set control and synchronising panels
- Additional alarms and shutdowns
- A selection of exhaust silencer noise levels

For further information on all of the standard and optional features accompanying this product please contact your local Dealer or visit:

www.xindacreation.com

P110-3



Ratings and Performance Data

Engine Make		Perkins	
Engine Model:		1104C-44TAG2	
Alternator Make		Leroy Somer	
Alternator Model:		LL3114F	
Control Panel:		FG100	
Base Frame:		Heavy Duty Fabricated Steel	
Circuit Breaker Type:		3 Pole MCCB	
Frequency:		50 HZ	60 HZ
Engine Speed: RPM	rpm	1500	1800
Fuel Tank Capacity:	litres (US gal)	218 (57.59)	
Fuel Consumption Prime	litres (US gal)/hr	21.7 (5.7)	25.7 (6.8)
Fuel Consumption Standby	litres (US gal)/hr	23.8 (6.3)	28.5 (7.5)

Engine Technical Data

No. of Cylinders		4
Alignment		IN LINE
Cycle		4 STROKE
Bore	mm (in)	105 (4.1)
Stroke	mm (in)	127 (5)
Induction		TURBOCHARGED AIR TO AIR CHARGE COOLED
Cooling Method		WATER
Governing Type		ELECTRONIC
Governing Class		ISO 8528 G2
Compression Ratio		18.3:1
Displacement	L (cu. in)	4.4 (268.5)
Moment of Inertia:	kg m ² (lb/in ²)	1.51 (5160)
Voltage		12
Ground		Negative
Battery Charger Amps		65
Engine Weight Dry	kg (lb)	401 (884)
Engine Weight Wet	kg (lb)	414 (912)

Engine Performance Data

		50 Hz	60 Hz
Engine Speed	rpm	1500	1800
Gross Engine Power Prime	kW (hp)	93.6 (126)	106.8 (143)
Gross Engine Power Standby	kW (hp)	103 (138)	117.5 (158)
BMEP Prime	kPa (psi)	1702 (246.9)	1619 (234.8)
BMEP Standby	kPa (psi)	1873 (271.7)	1781 (258.3)

P110-3



Fuel System

Fuel Filter Type:		Replaceable Element			
Recommended Fuel:		Class A2 Diesel			
Fuel Consumption at		110 % Load	100 % Load	75 % Load	50 % Load
50 Hz Prime:	l/hr (US gal/hr)	23.8 (6.3)	21.7 (5.7)	16.5 (4.4)	11.7 (3.1)
50 Hz Standby	l/hr (US gal/hr)	-	23.8 (6.3)	18 (4.8)	12.6 (3.3)
60 Hz Prime	l/hr (US gal/hr)	28.5 (7.5)	25.7 (6.8)	19.6 (5.2)	14.1 (3.7)
60 Hz Standby	l/hr (US gal/hr)	-	28.5 (7.5)	21.5 (5.7)	15.2 (4)

(Based on diesel fuel with a specific gravity of 0.84 and conforming to BS2869 classA2,EN590)

Air System

		50 Hz	60 Hz
Air Filter Type:		Replaceable Element	
Combustion Air Flow Prime	m ³ /min (cfm)	6 (212)	7.8 (274)
Combustion Air Flow Standby	m ³ /min (cfm)	6.3 (221)	7.8 (275)
Max. Combustion Air Intake Restriction	kPa	8 (32.1)	8 (32.1)

Cooling System

		50 Hz	60 Hz
Cooling System Capacity	l (US gal)	17.5 (4.6)	17.5 (4.6)
Water Pump Type:		Centrifugal	
Heat Rejected to Water & Lube Oil: Prime	kW (Btu/min)	46.1 (2622)	57.7 (3281)
Heat Rejected to Water & Lube Oil: Standby	kW (Btu/min)	50.7 (2883)	64 (3640)
Heat Radiation to Room*: Prime	kW (Btu/min)	13.9 (790)	16.5 (938)
Heat Radiation to Room*: Standby	kW (Btu/min)	15.3 (870)	17.7 (543)
Radiator Fan Load:	kW (hp)	2.8 (3.8)	4.8 (6.4)
Radiator Cooling Airflow:	m ³ /min (cfm)	187.8 (6632)	244.2 (8624)
External Restriction to Cooling Airflow:	Pa (in H ₂ O)	125 (0.5)	125 (0.5)

*: Heat radiated from engine and alternator
Designed to operate in ambient conditions up to 50°C (122°F).
Contact your local FG Wilson Dealer for power ratings at specific site conditions.

Lubrication System

Oil Filter Type:		Spin-On, Full Flow
Total Oil Capacity:	l (US gal)	8 (2.1)
Oil Pan Capacity:	l (US gal)	7 (1.8)
Oil Type:		API CC/SE
Oil Cooling Method:		WATER

Exhaust System

		50 Hz	60 Hz
Maximum Allowable Back Pressure:	kPa (in Hg)	18 (5.3)	15 (4.4)
Exhaust Gas Flow: Prime	m ³ /min (cfm)	15.2 (537)	18.4 (650)
Exhaust Gas Flow: Standby	m ³ /min (cfm)	16.3 (576)	20.4 (720)
Exhaust Gas Temperature: Prime	°C (°F)	514 (957)	517 (963)
Exhaust Gas Temperature: Standby	°C (°F)	543 (1009)	574 (1065)

P110-3



Alternator Physical Data

No. of Bearings:	1
Insulation Class:	H
Winding Pitch:	2/3
Winding Code	6
Wires:	12
Ingress Protection Rating:	IP23
Excitation System:	SHUNT
AVR Model:	R250

* dependant on voltage code selected

Alternator Operating Data

Overspeed: rpm	2250
Voltage Regulation: (Steady state) %	+/- 0.5
Wave Form NEMA = TIF:	50
Wave Form IEC = THF: %	2
Total Harmonic content LL/LN: %	2
Radio Interference:	EN61000-6
Radiant Heat: 50 Hz kW (Btu/min)	7.8 (444)
Radiant Heat: 60 Hz kW (Btu/min)	8.3 (472)

Alternator Performance Data 50 Hz:

		415/240 V	400/230 V	380/220 V	220/127 V
Voltage Code			230/115 V	220/110 V	
			200/115 V		
Motor Starting Capability*	kVA	256	240	220	282
Short Circuit Capacity**	%	300	300	300	300
Reactances	Xd	2.666	2.87	3.18	2.372
	X'd	0.12	0.129	0.143	0.107
	X''d	0.077	0.077	0.086	0.064

Alternator Performance Data 60 Hz

		480/277 V	380/220 V	240/120 V	440/254 V
Voltage Code		240/139 V	220/110 V	208/120 V	220/127 V
Motor Starting Capability*	kVA	280	187	219	205
Short Circuit Capacity**	%	300	300	300	300
Reactances	Xd	2.702	4.312	3.598	3.891
	X'd	0.121	0.194	0.162	0.175
	X''d	0.073	0.116	0.097	0.105

Reactances shown are applicable to prime ratings.

*Based on 30% voltage dip at 0.6 power factor.

** With optional independant excitation system (PMG / AUX winding)

P110-3



Output Ratings 50 Hz

Prime			Standby	
Voltage Code	kVA	kW	kVA	kW
415/240V	100	80	110	88
400/230V	100	80	110	88
380/220V	100	80	110	88
230/115V	100	80	110	88
220/127V	100	80	110	88
220/110V	100	80	110	88
200/115V	100	80	110	88
240V				
230V				
220V				

Output Ratings 60 Hz

Prime			Standby	
Voltage Code	kVA	kW	kVA	kW
480/277V	113	90.4	125	100
440/254V	113	90.4	125	100
416/240V				
400/230V				
380/220V	113	90.4	125	100
240/139V	113	90.4	125	100
240/120V	113	90.4	125	100
230/115V				
220/127V	113	90.4	125	100
220/110V	113	90.4	125	100
208/120V	113	90.4	125	100
240/120				
220/110				



P110-3

Dealer Contact Details



Beijing Xinda Creation Machinery Equipment Co.Ltd...

Contact person:Aaron shang
Website: www.xindacreation.com

Phone :(+86)(0)13911564503
E-mail:aaron.shang@xindacreation.com

Documentation

Operation and maintenance manual including circuit wiring diagrams.

Generator Set Standards

The equipment meets the following standards: BS5000, ISO 8528, ISO 3046, IEC 60034, NEMA MG-1.22.

Warranty

The warranty for this product in prime applications is 12 months from date of start-up, unlimited hours (8760).
For standby applications the warranty period is 24 months from date of start-up, limited to 500 hours per year.

FG Wilson manufactures product in the following locations:

Northern Ireland • Brazil • China • India

With headquarters in Northern Ireland, FG Wilson operates through a Global Dealer Network.

To contact your local Sales Office please visit the FG Wilson website at www.xindacreation.com.

FG Wilson is a trading name of Caterpillar (NI) Limited.

In line with our policy of continuous product development, we reserve the right to change specification without notice.

2021-10-21