

GOLF LiFePO4 Battery

B-LFP-72-150



| | |
|-------------------------|--|
| MODEL | B-LFP-72-150GC |
| NOMINAL VOLTAGE | 73.6V |
| NOMINAL CAPACITY | 150AH |
| CELL CHEMISTRY | Lithium Iron Phosphate (LiFePO4) |
| CYCLE LIFE | ≥4000 cycles at 25°C, 0.5C rate, 80% DOD to 80% of initial capacity |

| | |
|----------------------------------|---|
| SAFETY & INTELLIGENCE | <ul style="list-style-type: none"> Continuous voltage, current, and temperature monitoring Six redundant safety protections using Level 4 fuses. Multiple battery disconnects and Microprocessors CAN-Bus Communication SOC can check the power at any time Bluetooth® (MOS solution) |
|----------------------------------|---|

PHYSICAL SPECIFICATIONS

| | |
|------------------------------|----------------------------------|
| Dimensions L*W*H Inches (MM) | 35*15*9.7 (890*380*245) |
| Weight LBS (KG) | 234 (106) |
| Terminal Type | M8 |
| Estimated Range: Miles (KM) | 65-75 (104-120) |
| Protection Level | IP65 |
| Shell Material | iron |
| Handle Material | Metal |
| Calendar Life | 12years 25°C · SOC 100% ,EOL 80% |
| Battery pack factory SOC | 50% |
| Battery SOC operating range | 0-100% |

PHYSICAL PRECISION

| | |
|-------------------------------------|-----------------------------------|
| Insulation requirements | ≥20MΩ/1000VDC 25°C±5°C RH50% |
| Unit voltage acquisition accuracy | ±5mV Capture every single monomer |
| Balanced current | 30mA ±10 passive balance |
| BMS power consumption | ≤3W |
| Temperature acquisition accuracy | ±2°C |
| SOC theoretical estimation accuracy | ±5% |
| Current acquisition accuracy | ≤ ± 0.5% FSR |

DISCHARGE SPECIFICATIONS Performance and System @77°F (25°C)

| | |
|---|------|
| Maximum Continuous Discharge Current | 220A |
| Maximum Pulse Discharge Current (30 sec) | 370A |
| Maximum Instantaneous Discharge Current (2 sec) | 600A |

ELECTRICAL SPECIFICATIONS

| | |
|-------------------------|---------------------------------------|
| Nominal Voltage (V) | 73.6 |
| Operating Voltage | 57.5V to 84V Battery cell: 2.5V~3.65V |
| Capacity AMP Hours (AH) | 150AH |
| Energy (WH) | 11,040 Wh |
| Self-Discharge | 1-3% per month |
| Battery Group Solution | 23S1P A boxful |

TEMPERATURE SPECIFICATIONS

| | |
|-----------------------------|--------------------------------|
| Discharge temperature range | -4°F to 140°F (-20°C to 60°C) |
| Charge Temperature Range | 32°F to 131°F (0°C to 55°C) |
| Storage Temperature Range | -40°F to 140°F (-40°C to 60°C) |



SAFETY AND FEATURES

| | | |
|-----------------------|--|---|
| Protection function | Short Circuit Protection Overheat Protection Overcharge Protection | Over-discharge Protection Overcurrent Protection Real-time Temperature Monitoring |
| Battery Insurance | PICC | |
| Battery case function | Switch sleep button Pressure relief valve | |
| Battery certification | UL/CE/IEC/UN38.3 | |

CHARGING SPECIFICATIONS

| | |
|--|--|
| Recommended Standard Charger Current | ≤40A |
| Maximum Continuous Charging Current | 80A 50°F~113°F (10°C~45°C) · 5% < SOC < 80% |
| Maximum instantaneous charging current (10S) | 150A 50°F~113°F (10°C~45°C) · 5% < SOC < 80% |



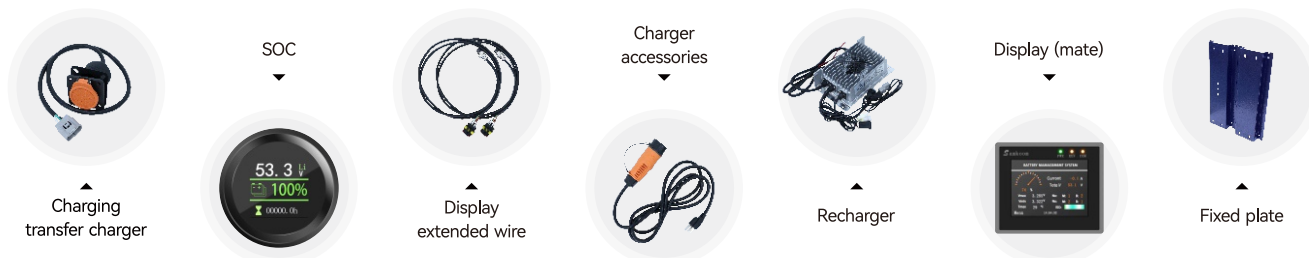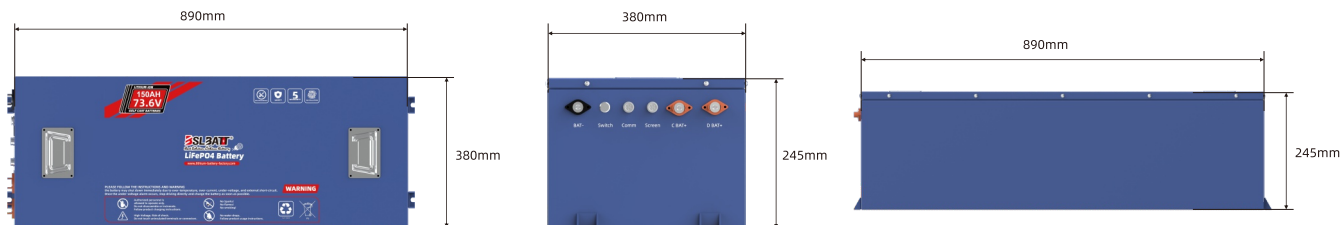

FIVE YEAR COST COMPARISON BETWEEN BSLBATT & LEAD ACID BATTERIES

| | YEAR 1 | YEAR 2 | YEAR 3 | YEAR 4 | YEAR 5 |
|---------------------------|-----------------------|----------------------|----------------------|----------------------|-------------------------|
| \$ Cost Of Battery | ✂ Installation | ⚙ Maintenance | ⚙ Maintenance | ⚙ Maintenance | 🔍 Battery Change |
| BSLBATT | \$\$\$\$ | | | | |
| Lead Acid | \$ | \$ | \$ | \$ | \$ |
| Total | | | | | \$\$\$\$ |

STRUCTURAL DIFFERENCES IN THE BSLBATT GOLF CART SERIES

Each Cell Is Encased In Aluminum

- ✓ Provides dimensional stability

Steel Battery Bracket

- ✓ Provides vibration and shock resistance

External Heat Sink Keeps

- ✓ BMS cool by providing heat dissipation to outside

BMS Bolted To Heat Sink

- ✓ Reduces vibration and prevents accidental faults due to vibration and it extends battery life

Bolted Connections To BMS

- ✓ Provides stable mechanical and electrical connections

Positive And Negative BusBar


- ✓ Creates an exceptional current collector

Ip65 Rated Casing

- ✓ Ensures water, dust and splash-resistance

TECHNICAL BSLBATT LITHIUM CURVE

ENVIRONMENT TEMPERATURE:25°C

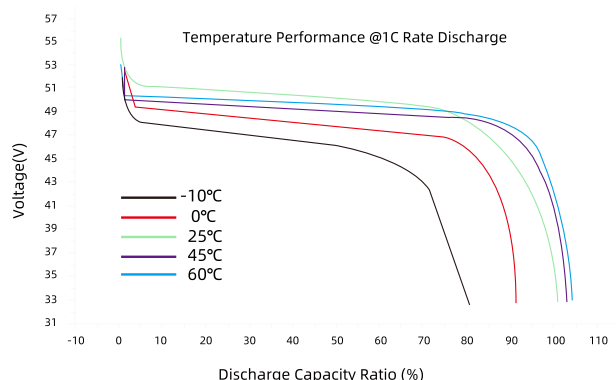

CHARGING CONDITION: 1C CC-CV to 3.65V, cutoff 0.05C @25°C; 100Ah-Discharge Rate@25°C

