

Replacement for Lead Acid, GEL or AGM in LFP Battery Solutions



BSL Series

B-LFP24-208

to replace lead acid GEL Or AGM

PRODUCT FEATURES


Designed for Power Energy Storage, Marine, RV, UPS, Lawn Mowers, Fish Finders, Access Control Systems, and House Alarm Security applications, BSLBATT's 24V 5325Wh lithium batteries last up to four times longer than lead-acid batteries. They are maintenance-free, lightweight, and easy to operate.

Our B-LFP24-208 model is equipped with the industry's leading LFP battery technology, featuring the safest lithium battery chemistry available today. This makes it an ideal choice for deep-cycle applications.

CHARGE AND DISCHARGE CURVE

25.6V 208Ah Charge-Discharge Curve 0.5C,25C 29 -28 27 26 Voltage(V) 25 24 23 22 21 Discharge 20 Charge 10 20 30 40 50 60 70 80 90 100 Capacity(%)

DIMENSION

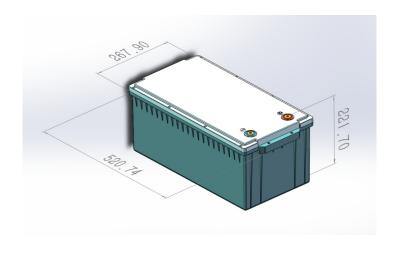

Certification: UL, FCC, CE, ROHS, UN38.3, IEC



Battery Model	B-LFP24-208
Nominal Voltage	25.6 V
Typical Capacity	208 Ah
Energy	5325 Wh
Discharge	
Working Current	0.5 C
Maximum Current	1 C
Cut-off Voltage	About 20 V
Charge	
Voltage	28.8 ± 0.2 V
Working Current	0.5 C
Max Charging Current	≤1 C
Charge Mode	CC/CV, please use special lithium charger
Charging Cut-off Current	About 7.5 A
Operation Temperature	
Charge	0°C ~ +55°C
Discharge	-20°C ~ +60°C
Additional Data	
Storage Temperature	-20°C ~ +45°C
Discharging Inner Resista	nce ≤ 60 mΩ
Protection Function	Overcharge, over-discharge, over-current, short circuit and other protection functions
Output Mode	M8 Terminal
Shell Material	ABS
Weight	37.76 Kg

Note: Parameters can be adjusted according to customer requirements







520*268*219 (±2) mm

1P8S ≥3500@ 80%DOD (0.5C, 25°C)





Facebook

Linkedin

Tiktok

Instagram

Youtube



Dimension (L*W*H)

Cycle

Serial-parallel module



Tier One, A+ LiFePO4 Cell Composition



5 Years Warranty Guarantee







Long Service Life



Eco-Friendly