



BSL Series

B-LFP24-67

to replace lead acid GEL or AGM




PRODUCT FEATURES

Designed for Marine/RV/UPS/Lawn Mover/Fish Finder/Access Control Power Energy Storage House Alarm Security applications. BSLBATT's 24V 1715 Wh lithium batteries last up to four times longer than lead-acid batteries. They are maintenance-free, lightweight, and easy to operate.


Our B-LFP24-67 is equipped with the industry's leading LFP batteries, the safest lithium battery chemistry available today. This makes it ideal for deep-cycle applications.

CHARGE AND DISCHARGE CURVE

25.6V 67Ah Charge-Discharge Curve 0.2C, 25°C

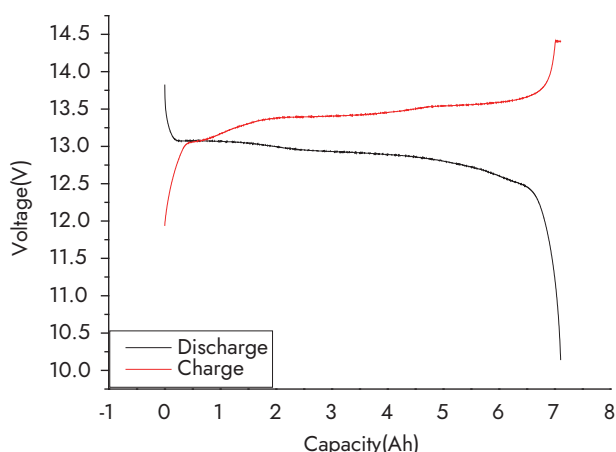

DIMENSION

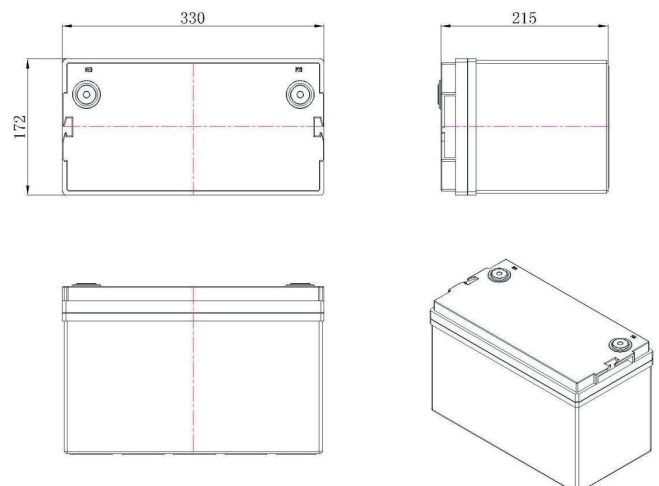

Battery Model

B-LFP24-67

Nominal Voltage	25.6 V
Typical Capacity	67 ± 1 Ah(At 0.2C discharge rate)
Energy	1715 Wh

Discharge

Working Current	≤30A
Maximum Current	≤40A
Cut-off Voltage	About 20 V

Charge

Voltage	28.8 ± 0.2 V
Working Current	≤15A
Max Charging Current	≤20A
Charge Mode	CC/CV, please use special lithium charger
Charging Cut-off Current	About 1.34A

Operation Temperature

Charge	0℃ ~ +55℃
Discharge	-20℃ ~ +60℃

Additional Data

Storage Temperature	-20℃ ~ +60℃
Discharging Inner Resistance	≤ 30 mΩ
Protection Function	Overcharge, over-discharge, over-current, short circuit and other protection functions
Output Mode	M8 Terminal
Shell Material	ABS+PC
Weight	About 12.5 Kg (Single weight)
Dimension (L*W*H)	330*172*215 (±2) mm
Modules In Series	2
Cycle	≥3500, 80%DOD (0.2C, 25℃)

Note: Parameters can be adjusted according to customer requirements



Facebook



Linkedin



Tiktik



Instagram



Youtube



Drop-in Replacement



Tier One, A+ LiFePO4 Cell Composition



5 Years Warranty Guarantee



Smart Hardware & Software Design



Long Service Life



Eco-Friendly