

Engine Speed (r/min)	Type of Operation	Engine Power (kW)	Generator Power (kW)
1500	Prime Power	818	720
1500	Standby Power	900	800

· The engine performance is as per GB/T2820
 · Ratings are based on GB/T11471.

• Prime Power :

There is no time limit in the case of variable load operation. In any 250 hours of continuous operation period, the variable load of average work load less than 80% of the prime power.
 The operation time in the situation of 100% prime power no more than 500 hours. Permit 10% overload running 1 hour in any 12 hours of continuous operation period.
 The overload 10% power running time of every year no more than 25 hours.

• Standby Power :

The annual total standby power load should be less than 80% and the average running time shall be less than 200 hours. Among them the standby power point should be no more than 25 hours a year.

Specifications	
Engine Model	AS35000-W0165
Engine Type	In-line, 4 strokes, 4 valves, water-cooled, Turbo charged, air-to-air intercooled
Combustion type	Direct injection
Cylinder Type	Dry liner
Number of cylinders	6
Bore × stroke	186 × 215mm
Displacement	35.1 L
Compression ratio	15: 1
Firing order	1-5-3-6-2-4
Injection timing	Electric type
Dry weight	Approx. 4000kg
Dimension (L×W×H)	2429×1387×2146mm
Rotation	Counter clockwise viewed from Flywheel
Fly wheel housing	SAE NO.0#
Fly wheel	SAE NO.18#

Mechanism

Type	Over head valve
Number of valve	Intake 2, exhaust 2 per cylinder
Valve lashes at cold	Intake 0.4mm Exhaust 0.45mm

Fuel System

Injection pump	Hengyang
Governor	Electric type
Feed pump	Mechanical type
Injection nozzle	Multi hole type
Opening pressure	290kg/cm ²
Fuel filter	Full flow, cartridge type
Used fuel	Diesel fuel oil

Valve Timing

	Opening	Close
Intake valve	40° BTDC	48° ABDC
Exhaust valve	54° BBDC	30° ATDC

Fuel Consumption

Power	L/h (1500r/min)	L/h (1800r/min)
25%	60.4	N/A
50%	102	N/A
75%	149.3	N/A
100%	203.8	N/A
110%	225.9	N/A

Lubrication System

Lub. Method	Fully forced pressure feed type
Oil pump	Gear type driven by crankshaft
Oil filter	Full flow, cartridge type
Oil pan capacity	High level 100 liters Low level 75 liters
Angularity limit	Front down 25° Front up 35° Side to side 35°

Cooling System

Cooling method	Fresh water forced circulation
Water capacity (engine only)	78 liters
Lid Min. pressure	70kPa
Water pump	Centrifugal type driven by belt
Water pump Capacity	1000 L/min (1500r/min)
Thermostat	Wax-pellet type Opening temp. 77°C Full open temp. 90°C
Cooling fan	Blower type, plastic 1371 mm diameter, 8 blades
Cooling fan power consumption	TBA
The maximum temp. of coolant in prime / Standby power	102/98°C

Electrical System

Charging generator	27V×55A
Voltage regulator	Built-in type IC regulator
Starting motor	24V×13kW
Battery Voltage	24V
Battery Capacity	200 AH

Engineering Data

Heat rejection to coolant	120 kcal/sec (1500r/min)
Heat rejection to CAC	46.6 kcal/sec (1500r/min)
Engine air flow	2x29.3m ³ /min (1500r/min)
Exhaust gas flow	155.2 m ³ /min (1500r/min)
Exhaust gas temp	650 °C
Max. permissible restrictions	3 kPa initial
Intake system	6 kPa initial
Exhaust system	11 kPa max
Max. permissible altitude	N/A
intercooler permissible restrictions	14 kPa

Power Derate

All data is based on the engine operating without air compressor, fan, generator, fan, optional equipment and driven components .

All data is based on the engine operating with 3.7 kPa inlet air restriction , 10 kPa exhaust restriction and with 13 kPa Inter-cooled implement differential pressure.

Curves shown above represent gross engine performance capabilities obtained and corrected in accordance with GB/T18297 of 99kPa baiometric press, 298K inlet air temperature, and 1kPa water vapor pressure .




AGG UK | AGG China | AGG USA | AGG UAE
info@aggpower.co.uk | www.aggpower.co.uk

- Follow us @facebook.com/.aggpowergroup
- Follow us @linkedin.com/company/agg-power
- Follow us @ AGGPOWER

All information in the document is substantially correct a the time of printing but may be subsequently altered by the company.

Distributed by

1500rpm Altitude Derate Standby Power

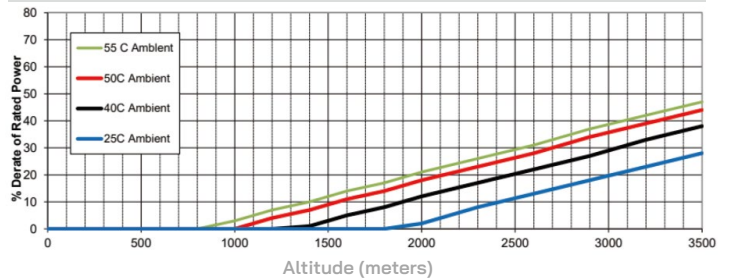

1500rpm Altitude Derate Prime Power

