


MODEL: HC-10GF-60 **440V | 1800rpm | 60Hz**

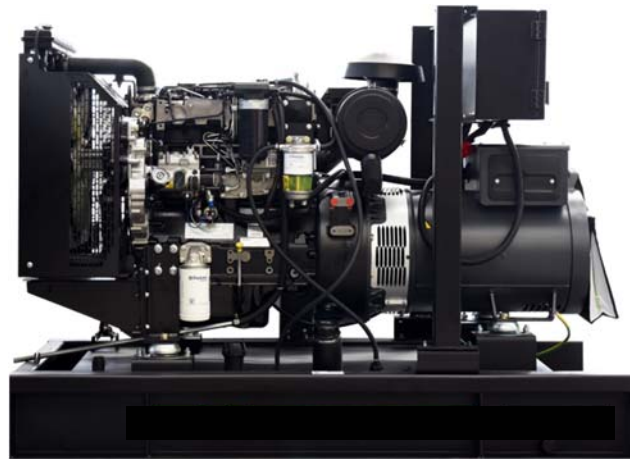

ESP Standby Power	12kVA	PRP Prime Power	11kVA
ENGINE	Perkins	ALTERNATOR	STAMFORD
	403D-11G		SOL1-H1

GENERAL FEATURES

Engine: Perkins 403D-11G	Alternator: single bearing, IP23, insulation class H
50°C radiator, fans are driven by belt, with safety guard	Dry type air filter, fuel filter & oil filter
Vibration damper	Standard control panel
24V charging alternator	Exhaust bellows, elbows, flange & muffler
Lead-acid batteries, rack and cables	User manual

MODEL: HC-10GF-60**440V | 1800rpm | 60Hz****GENERATOR RATINGS**

Voltage	Hz	Phase	PF (COS Φ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
480/277	60	3	0.8	14	9.6kW/12kVA	8.8kW/11kVA
460/266	60	3	0.8	15	9.6kW/12kVA	8.8kW/11kVA
440/254	60	3	0.8	16	9.6kW/12kVA	8.8kW/11kVA
416/240	60	3	0.8	17	9.6kW/12kVA	8.8kW/11kVA

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

HiChai Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from HiChai Power or distributors in your location.

MODEL: HC-10GF-60**440V | 1800rpm | 60Hz****ENGINE SPECIFICATION**

Manufacturer / Model	Perkins 403D-11G
Air intake system	Naturally aspirated
Fuel system	Indirect injection
Cylinder arrangement	3 in line
Displacement	1.131L
Bore and stroke	77×81 mm
Compression ratio	23
Rated speed	1800rpm
Max. Standby power at rated speed	11.8kW
Governor type	Mechanical

Exhaust System

Exhaust gas flow	2.4 m ³ /min
Exhaust temperature	515°C
Max back pressure	10.2kPa

Air Intake System

Max intake restriction	6.4kPa
Combustion air flow	0.9 m ³ /min
Air flow required for radiator	45 m ³ /min

MODEL: HC-10GF-60**440V | 1800rpm | 60Hz****Fuel System**

Fuel consumption @ 100% (Prime Power) Load	248 g/kWh	3.3 L/h
Fuel consumption @ 75% (Prime Power) Load	257 g/kWh	2.5 L/h
Fuel consumption @ 50% (Prime Power) Load	280 g/kWh	1.8 L/h

Oil System

Total oil capacity	4.9L
Oil sump capacity	3.4-4.9L

Cooling System

Coolant capacity	5.2L
Max water temperature	112°C

MODEL: HC-10GF-60

440V | 1800rpm | 60Hz

ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	<50
THF	<2%
Alternator Capacity	11.2kVA
Alternator Efficiency	81.9%

MODEL: HC-10GF-60

440V | 1800rpm | 60Hz

GENERATING SET DATA

Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +25\%$
Transient voltage deviation (sudden power increase)	$\leq -20\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 6S$
Voltage recovery time (sudden power increase)	$\leq 6S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 1.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +12\%$
Transient frequency deviation (sudden power increase)	$\leq -10\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 5S$
Frequency recovery time (sudden power increase)	$\leq 5S$

STANDARD FEATURES



Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	MCCB
Base fuel tank		

MODEL: HC-10GF-60 **440V | 1800rpm | 60Hz**

OPTIONS

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		

DIMENSIONS & WEIGHT

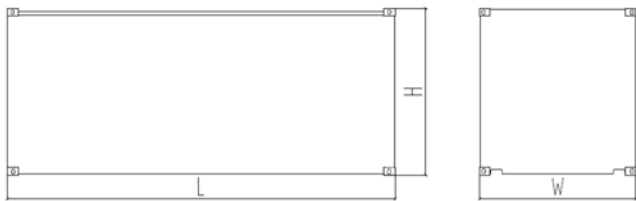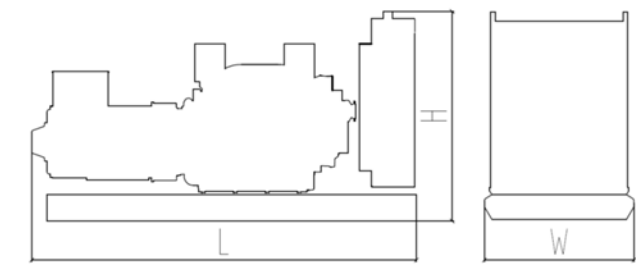

Standard Configuration (open type)
Overall Dimensions: 1300×690×1320 mm
Weight: 300kg
Soundproof Type
Overall Dimensions: 1710×880×1350 mm
Weight: 700kg

Specifications are subject to change without notice.