


MODEL: HC-10GF

400V | 1500rpm | 50Hz

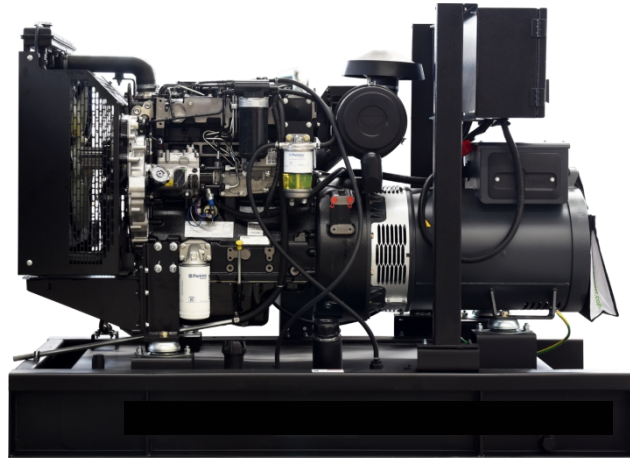

ESP Standby Power	10 kVA	PRP Prime Power	9 kVA
ENGINE	Perkins	ALTERNATOR	STAMFORD
	403D-11G		SOL1-H1

GENERAL FEATURES

Engine: Perkins 403D-11G

Alternator: single bearing, IP23, insulation class H

50°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

MODEL: HC-10GF**400V | 1500rpm | 50Hz****GENERATOR RATINGS**

Voltage	Hz	Phase	PF (COS Φ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
440/254	50	3	0.8	13	8kW/10kVA	7.2kW/9kVA
415/240	50	3	0.8	14	8kW/10kVA	7.2kW/9kVA
400/230	50	3	0.8	14	8kW/10kVA	7.2kW/9kVA
380/220	50	3	0.8	15	8kW/10kVA	7.2kW/9kVA

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO 8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

HICHAJ Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 12 months or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from HICHAJ Power or distributors in your location.

Comprehensive Solutions For

POWER GENERATION

MODEL: HC-10GF**400V | 1500rpm | 50Hz****ENGINE SPECIFICATION**

Manufacturer / Model	Perkins 403D-11G
----------------------	------------------

Air intake system	Natural aspirated
-------------------	-------------------

Fuel system	Indirect Injection
-------------	--------------------

Cylinder arrangement	3 in line
----------------------	-----------

Displacement	1.131L
--------------	--------

Bore and stroke	77×81 mm
-----------------	----------

Compression ratio	23:1
-------------------	------

Rated speed	1500rpm
-------------	---------

Max. Standby power at rated speed	9.5KW
-----------------------------------	-------

Governor type	Mechanical
---------------	------------

Exhaust System

Exhaust gas flow	1.8 m ³ /min
------------------	-------------------------

Exhaust temperature	420°C
---------------------	-------

Max back pressure	10.2kPa
-------------------	---------

Air Intake System

Max intake restriction	6.4kPa
------------------------	--------

Combustion air flow	0.7 m ³ /min
---------------------	-------------------------

Air flow required for radiator	40.2 m ³ /min
--------------------------------	--------------------------

Comprehensive Solutions For

POWER GENERATION

MODEL: HC-10GF**400V | 1500rpm | 50Hz****Fuel System**

Fuel consumption @ 100% (Prime Power) Load	252 g/kWh	2.7 L/h
Fuel consumption @ 75% (Prime Power) Load	258 g/kWh	2.0 L/h
Fuel consumption @ 50% (Prime Power) Load	286 g/kWh	1.5 L/h

Oil System

Total oil capacity	4.9L
Oil consumption ratio based on fuel consumption data	N/A
Oil sump capacity	3.4-4.4L

Cooling System

Coolant capacity	5.2L
Max water temperature	112°C

MODEL: HC-10GF**400V | 1500rpm | 50Hz**

ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	< 50
THF	< 2%
Alternator Capacity	10kVA
Alternator Efficiency	81.0%

MODEL: HC-10GF**400V | 1500rpm | 50Hz****GENERATING SET DATA**

Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +25\%$
Transient voltage deviation (sudden power increase)	$\leq -20\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 6S$
Voltage recovery time (sudden power increase)	$\leq 6S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 1.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +12\%$
Transient frequency deviation (sudden power increase)	$\leq -10\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 5S$
Frequency recovery time (sudden power increase)	$\leq 5S$

STANDARD FEATURES

Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	MCCB
Base fuel tank		

MODEL: HC-10GF

400V | 1500rpm | 50Hz

OPTIONS

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		

DIMENSIONS & WEIGHT



Standard Configuration (open type)

Overall Dimensions: 1300×690×1320 mm

Weight: 280 kg



Soundproof Type

Overall Dimensions: 1710×880×1350 mm

Weight: 680 kg

Specifications are subject to change without notice.