

**MODEL: HC-180GF**

**400V | 1500rpm | 50Hz**



<b>ESP</b> Standby Power	<b>220 kVA</b>	<b>PRP</b> Prime Power	<b>200 kVA</b>
<b>ENGINE</b>	<b>VOLVO</b>	<b>ALTERNATOR</b>	<b>STAMFORD</b>
	<b>TAD733GE</b>		<b>UCI274H1</b>

## GENERAL FEATURES

Engine: VOLVO TAD733GE

Alternator: single bearing, IP23, insulation class H

55°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

**MODEL: HC-180GF****400V | 1500rpm | 50Hz****GENERATOR RATINGS**

Voltage	Hz	Phase	PF ( COS $\Phi$ )	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
440/254	50	3	0.8	289	176/220	160/200
415/240	50	3	0.8	306	176/220	160/200
400/230	50	3	0.8	318	176/220	160/200
380/220	50	3	0.8	334	176/220	160/200

**Prime Power (PRP):** Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

**Standby Power Rating (ESP):** The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

**SALES PROMISES**

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

**MODEL: HC-180GF****400V | 1500rpm | 50Hz****ENGINE SPECIFICATION**

Manufacturer / Model	VOLVO/TAD733GE
Air intake system	Turbocharged, Air/Air inter cooling
Fuel system	Directly Injection Fuel System, Bosch Pump
Cylinder arrangement	6 in line
Displacement	7.15L
Bore and stroke	108*130 (mm)
Compression ratio	18.0
Rated speed	1500rpm
Max. Standby power at rated speed	197KW/268HP (with fan)
Governor type	EDC4

**Exhaust System**

Exhaust gas flow	37.2 m <sup>3</sup> / min
Exhaust temperature	530°C
Max back pressure	5 kPa

**Air Intake System**

Max intake restriction	3.5 kPa
Combustion air flow	12.4m <sup>3</sup> /min
Air flow required for radiator	162 m <sup>3</sup> /min

**MODEL: HC-180GF****400V | 1500rpm | 50Hz****Fuel System**

Fuel consumption @ 100% (Prime Power) Load	216 g/kWh	45.4L/h
Fuel consumption @ 75% (Prime Power) Load	214 g/kWh	34.0L/h
Fuel consumption @ 50% (Prime Power) Load	217 g/kWh	23.6L/h

**Oil System**

Total oil capacity	34L
Oil consumption	0.09L/h
Oil sump capacity	24~31L

**Cooling System**

Coolant capacity	37 L
Max water temperature	105°C

**MODEL: HC-180GF****400V | 1500rpm | 50Hz**

## ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

### Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	<50
THF	<2%
Alternator Capacity	200kVA
Alternator Efficiency	93.3%

**MODEL: HC-180GF****400V | 1500rpm | 50Hz****GENERATING SET DATA**

Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +25\%$
Transient voltage deviation (sudden power increase)	$\leq -20\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 6S$
Voltage recovery time (sudden power increase)	$\leq 6S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 1.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +12\%$
Transient frequency deviation (sudden power increase)	$\leq -10\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 5S$
Frequency recovery time (sudden power increase)	$\leq 5S$

**STANDARD FEATURES**

Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	Special coolant
Base fuel tank	MCCB	


**MODEL: HC-180GF**

**400V | 1500rpm | 50Hz**

**OPTIONS**

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		


**DIMENSIONS & WEIGHT**

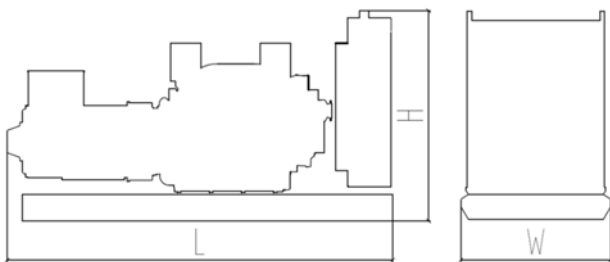

**Standard Configuration (open type with base fuel tank)**

Overall Dimensions: 2660×1050×1610 mm

Weight: 1820 kg

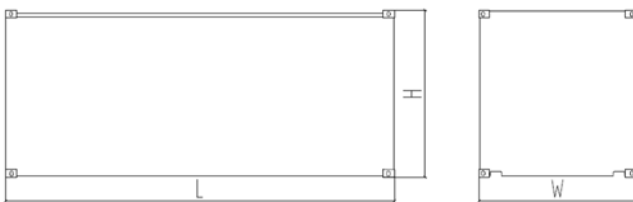

**Soundproof Type**

Overall Dimensions: 3590×1310×2050 mm

Weight: 2700 kg

*Specifications are subject to change without notice.*