


**MODEL: HC-330GF**

**400V | 1500rpm | 50Hz**

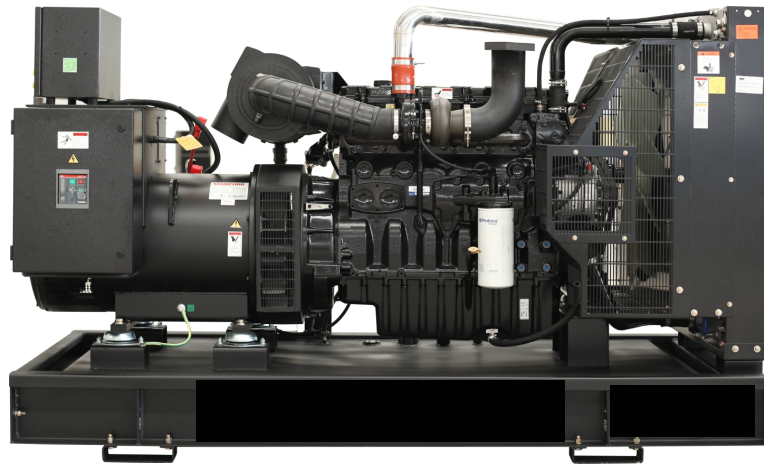

<b>ESP</b> Standby Power	<b>330 kVA</b>	<b>PRP</b> Prime Power	<b>300 kVA</b>
<b>ENGINE</b>	<b>Perkins</b>	<b>ALTERNATOR</b>	<b>STAMFORD</b>
	<b>1506A-E88TAG5</b>		<b>S4L1D-D41</b>

## GENERAL FEATURES

Engine: Perkins 1506A-E88TAG5

Alternator: single bearing, IP23, insulation class H

50°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

**MODEL: HC-330GF****400V | 1500rpm | 50Hz****GENERATOR RATINGS**

Voltage	Hz	Phase	PF ( COS $\Phi$ )	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
440/254	50	3	0.8	433	264kW/330kVA	240kW/300kVA
415/240	50	3	0.8	459	264kW/330kVA	240kW/300kVA
400/230	50	3	0.8	476	264kW/330kVA	240kW/300kVA
380/220	50	3	0.8	501	264kW/330kVA	240kW/300kVA

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 ( eqv ISO 8528 ) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

**SALES PROMISES**

HiChai Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: One year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from HiChai Power or distributors in your location.

Comprehensive Solutions For

**POWER GENERATION**

**MODEL: HC-330GF****400V | 1500rpm | 50Hz****ENGINE SPECIFICATION**

Manufacturer / Model	Perkins 1506A-E88TAG5
Air intake system	Turbocharged, air to air charge cooling
Fuel system	Direct Injection
Cylinder arrangement	6 in line
Displacement	8.8L
Bore and stroke	112×149 mm
Compression ratio	16.1:1
Rated speed	1500rpm
Max. Standby power at rated speed	307KW
Governor type	Electronic

**Exhaust System**

Exhaust gas flow	50 m <sup>3</sup> /min
Exhaust temperature	574°C
Max back pressure	10kPa

**Air Intake System**

Max intake restriction	6.2kPa
Combustion air flow	18.3 m <sup>3</sup> /min
Air flow required for radiator	370 m <sup>3</sup> /min

Comprehensive Solutions For

**POWER GENERATION**

**MODEL: HC-330GF**

**400V | 1500rpm | 50Hz**

**Fuel System**

Fuel consumption @ 100% (Prime Power) Load	196 g/kWh	61.4 L/h
Fuel consumption @ 75% (Prime Power) Load	195.2 g/kWh	45.9 L/h
Fuel consumption @ 50% (Prime Power) Load	197.5 g/kWh	31.5 L/h

**Oil System**

Total oil capacity	41L
Oil consumption ratio based on fuel consumption data	0.1% (As a percentage of fuel consumption)
Oil sump capacity	36-39L

**Cooling System**

Coolant capacity	33.2L
Max water temperature	107°C

**MODEL: HC-330GF**

**400V | 1500rpm | 50Hz**

## ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

### Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	< 50
THF	< 2%
Alternator Capacity	310kVA
Alternator Efficiency	92.9%

**MODEL: HC-330GF****400V | 1500rpm | 50Hz****GENERATING SET DATA**

Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +20\%$
Transient voltage deviation (sudden power increase)	$\leq -15\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 4S$
Voltage recovery time (sudden power increase)	$\leq 4S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 0.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +10\%$
Transient frequency deviation (sudden power increase)	$\leq -7\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 3S$
Frequency recovery time (sudden power increase)	$\leq 3S$

**STANDARD FEATURES**

Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	MCCB


**MODEL: HC-330GF**

**400V | 1500rpm | 50Hz**

**OPTIONS**

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		


**DIMENSIONS & WEIGHT**

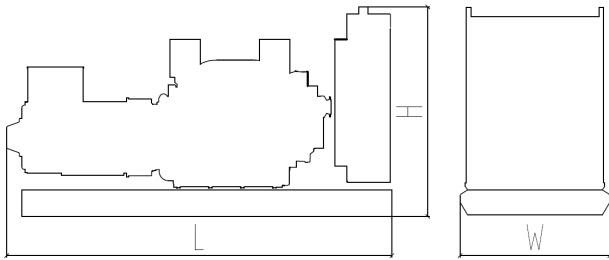

**Standard Configuration (open type)**

Overall Dimensions: 2890×1310×1690 mm

Weight: 2910 kg

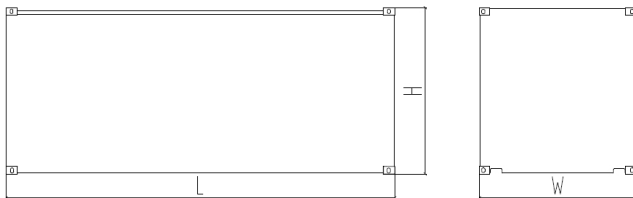

**Soundproof Type**

Overall Dimensions: 3590×1250×2050 mm

Weight: 3750 kg

*Specifications are subject to change without notice.*