


MODEL: H C -360GF

400V | 1500rpm | 50Hz

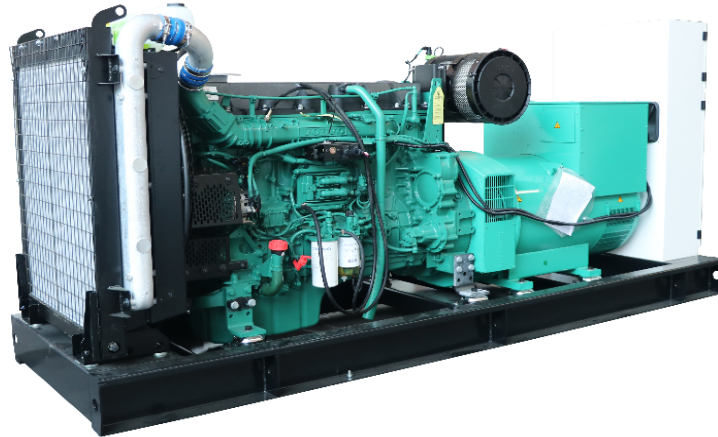

ESP Standby Power	500 kVA	PRP Prime Power	450 kVA
ENGINE	VOLVO	ALTERNATOR	STAMFORD
	TAD1345GE		S4L1D-G41

GENERAL FEATURES

Engine: VOLVO TAD1345GE

Alternator: single bearing, IP23, insulation class H

55°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

MODEL: H C -360GF

400V | 1500rpm | 50Hz

GENERATOR RATINGS

Voltage	Hz	Phase	PF (COSΦ)	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
440/254	50	3	0.8	656	400/500	360/450
415/240	50	3	0.8	695	400/500	360/450
400/230	50	3	0.8	721	400/500	360/450
380/220	50	3	0.8	759	400/500	360/450

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

SALES PROMISES

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

MODEL: H C -360GF**400V | 1500rpm | 50Hz****ENGINE SPECIFICATION**

Manufacturer / Model	VOLVO/TAD1345GE
Air intake system	Turbocharged, Air/Air inter cooling
Fuel system	Elec. Injection, Elec. Fuel System
Cylinder arrangement	6 in line
Displacement	12.78L
Bore and stroke	131×158 (mm)
Compression ratio	18.1
Rated speed	1500rpm
Max. Standby power at rated speed	431KW/586HP (with fan)
Governor type	EMS2

Exhaust System

Exhaust gas flow	58.3 m ³ / min
Exhaust temperature	470°C
Max back pressure	10 kPa

Air Intake System

Max intake restriction	5 kPa
Combustion air flow	27.6 m ³ /min
Air flow required for radiator	384 m ³ /min

Comprehensive Solutions For

POWER GENERATION

MODEL: H C -360GF

400V | 1500rpm | 50Hz

Fuel System

Fuel consumption @ 100% (Prime Power) Load	196 g/kWh	89 L/h
Fuel consumption @ 75% (Prime Power) Load	197 g/kWh	66.5 L/h
Fuel consumption @ 50% (Prime Power) Load	199 g/kWh	44.8 L/h

Oil System

Total oil capacity	36L
Oil consumption	0.04L/h
Oil sump capacity	19~30L

Cooling System

Coolant capacity	44 L
Max water temperature	107°C

MODEL: H C -360GF**400V | 1500rpm | 50Hz**

ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	< 50
THF	<2%
Alternator Capacity	450kVA
Alternator Efficiency	93.3%

MODEL: H C -360GF

400V | 1500rpm | 50Hz

GENERATING SET DATA

Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +20\%$
Transient voltage deviation (sudden power increase)	$\leq -15\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 4S$
Voltage recovery time (sudden power increase)	$\leq 4S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 0.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +10\%$
Transient frequency deviation (sudden power increase)	$\leq -7\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 3S$
Frequency recovery time (sudden power increase)	$\leq 3S$

STANDARD FEATURES

Standard auto control system	Exhaust system(including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	Special coolant
MCCB		


MODEL: H C -360GF

400V | 1500rpm | 50Hz

OPTIONS

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		

DIMENSIONS & WEIGHT

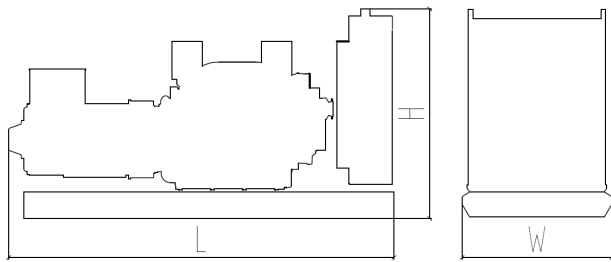

Standard Configuration (open type)

Overall Dimensions: 3200×1200×1830 mm

Weight: 3200 kg

Standard Configuration (with base fuel tank)


Overall Dimensions: 3200×1200×1830 mm

Weight: 3300 kg

Soundproof Type

Overall Dimensions: 4230×1460×2150 mm

Weight: 4500 kg

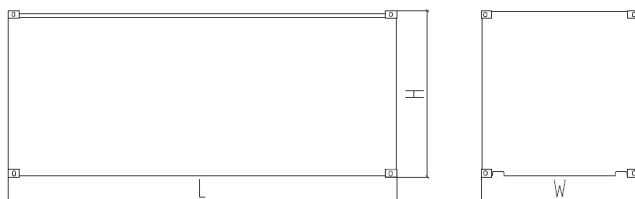

Specifications are subject to change without notice.