

**MODEL: H C -68GF**

**400V | 1500rpm | 50Hz**



<b>ESP</b> Standby Power	<b>94 kVA</b>	<b>PRP</b> Prime Power	<b>85 kVA</b>
<b>ENGINE</b>	<b>VOLVO</b>	<b>ALTERNATOR</b>	<b>STAMFORD</b>
	<b>TAD530GE</b>		<b>UCI224G1</b>

## GENERAL FEATURES

Engine: VOLVO TAD530GE

Alternator: single bearing, IP23, insulation class H

55°C radiator, fans are driven by belt, with safety guard

Dry type air filter, fuel filter & oil filter

Vibration damper

Standard control panel

24V charging alternator

Exhaust bellows, elbows, flange & muffler

Lead-acid batteries, rack and cables

User manual

**MODEL: H C -68GF****400V | 1500rpm | 50Hz****GENERATOR RATINGS**

Voltage	Hz	Phase	PF ( COS $\Phi$ )	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings ( kW / kVA)
440/254	50	3	0.8	123	75/94	68/85
415/240	50	3	0.8	130	75/94	68/85
400/230	50	3	0.8	135	75/94	68/85
380/220	50	3	0.8	142	75/94	68/85

**Prime Power (PRP):** Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 (eqv ISO8528) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

**Standby Power Rating (ESP):** The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

**SALES PROMISES**

Baifa Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: 15 months from the date BAIFA sold to the first buyer or one year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from Baifa Power or distributors in your location.

Comprehensive Solutions For

**POWER GENERATION**

**MODEL: H C -68GF****400V | 1500rpm | 50Hz****ENGINE SPECIFICATION**

Manufacturer / Model	VOLVO/TAD530GE
Air intake system	Turbocharged, Air/Air inter cooling
Fuel system	Directly Injection Fuel System, Bosch Pump
Cylinder arrangement	4 in line
Displacement	4.76L
Bore and stroke	108*130 (mm)
Compression ratio	18
Rated speed	1500rpm
Max. Standby power at rated speed	83KW/112HP(with fan)
Governor type	Heinzman Mechanical Governor

**Exhaust System**

Exhaust gas flow	16.3 m <sup>3</sup> / min
Exhaust temperature	527 °C
Max back pressure	5 kPa

**Air Intake System**

Max intake restriction	3.5 kPa
Combustion air flow	5.54 m <sup>3</sup> /min
Air flow required for radiator	90 m <sup>3</sup> /min

Comprehensive Solutions For

**POWER GENERATION**

**MODEL: H C -68GF**

**400V | 1500rpm | 50Hz**

**Fuel System**

Fuel consumption @ 100% (Prime Power) Load	217 g/kWh	19.2 L/h
Fuel consumption @ 75% (Prime Power) Load	219 g/kWh	14.5 L/h
Fuel consumption @ 50% (Prime Power) Load	231 g/kWh	10.1 L/h

**Oil System**

Total oil capacity	13L
Oil consumption	0.08L/h
Oil sump capacity	9~11L

**Cooling System**

Coolant capacity	20 L
Max water temperature	105°C

**MODEL: H C -68GF****400V | 1500rpm | 50Hz**

## ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

### Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	< 50
THF	< 2%
Alternator Capacity	85kVA
Alternator Efficiency	90.2%

**MODEL: H C -68GF**

**400V | 1500rpm | 50Hz**

### GENERATING SET DATA

Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +25\%$
Transient voltage deviation (sudden power increase)	$\leq -20\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 6S$
Voltage recovery time (sudden power increase)	$\leq 6S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 1.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +12\%$
Transient frequency deviation (sudden power increase)	$\leq -10\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 5S$
Frequency recovery time (sudden power increase)	$\leq 5S$

### STANDARD FEATURES

Standard auto control system	Exhaust system( including until muffler)	Documents
Oil drain valve	Starting batteries ( maintenance-free & watering-free) with connective wires	Special coolant
Base fuel tank	MCCB	


**MODEL: H C -68GF**

**400V | 1500rpm | 50Hz**

**OPTIONS**

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		

**DIMENSIONS & WEIGHT**

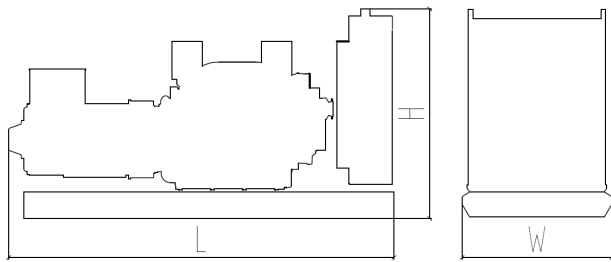

**Standard Configuration (open type with base fuel tank)**

Overall Dimensions: 2150×950×1550 mm

Weight: 1290 kg



**Soundproof Type**

Overall Dimensions: 2810×1140×1830 mm

Weight: 1850 kg

*Specifications are subject to change without notice.*