

**MODEL: HC-BD1375-60**

**440V | 1800rpm | 60Hz**



<b>ESP</b> Standby Power	<b>1375kVA</b>	<b>PRP</b> Prime Power	<b>1250kVA</b>
<b>ENGINE</b>	<b>Baudouin</b>	<b>ALTERNATOR</b>	<b>STAMFORD</b>
	<b>12M33D1265E201</b>		<b>S6L1D-F4</b>

## GENERAL FEATURES

Engine: Baudouin 12M33D1265E201	Alternator: single bearing, IP23, insulation class H
40°C radiator, fans are driven by belt, with safety guard	Dry type air filter, fuel filter & oil filter
Vibration damper	Standard control panel
24V charging alternator	Exhaust bellows, elbows, flange & muffler
Lead-acid batteries, rack and cables	User manual



**MODEL: HC-BD1375-60**

**440V | 1800rpm | 60Hz**

### GENERATOR RATINGS

Voltage	Hz	Phase	PF ( COSΦ )	Standby Amps	Standby Ratings (kW / kVA)	Prime Ratings (kW / kVA)
480/277	60	3	0.8	1654	1100kW/1375kVA	1000kW/1250kVA
460/266	60	3	0.8	1726	1100kW/1375kVA	1000kW/1250kVA
440/254	60	3	0.8	1804	1100kW/1375kVA	1000kW/1250kVA
416/240	60	3	0.8	1908	1100kW/1375kVA	1000kW/1250kVA

Prime Power (PRP): Prime power is available for an unlimited number of annual hours in variable load application, in accordance with GB/T2820 ( eqv ISO 8528 ) ; A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation.

Standby Power Rating (ESP): The standby power rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

### SALES PROMISES

HiChai Power provides a full line of brand new and high quality products. Each and every unit is strictly factory tested.

Warranty is according to our standard conditions: One year after installation or 1000 running hours (accumulated), whichever comes first.

Service and parts are available from HiChai Power or distributors in your location.

**MODEL: HC-BD1375-60****440V | 1800rpm | 60Hz****ENGINE SPECIFICATION**

Manufacturer / Model	Baudouin 12M33D1265E201
----------------------	-------------------------

Air intake system	Turbocharged and Aftercooled
-------------------	------------------------------

Fuel system	Mechanical Pump
-------------	-----------------

Cylinder arrangement	12 in V
----------------------	---------

Displacement	39.2L
--------------	-------

Bore and stroke	150 × 185 mm
-----------------	--------------

Compression ratio	15
-------------------	----

Rated speed	1800rpm
-------------	---------

Max. Standby power at rated speed	1265kW
-----------------------------------	--------

Governor type	Electronic
---------------	------------

**Exhaust System**

Exhaust gas flow	7231kg/h
------------------	----------

Exhaust temperature	550°C
---------------------	-------

Max back pressure	7.5kPa
-------------------	--------

**Air Intake System**

Max intake restriction	6.5kPa
------------------------	--------

Combustion air flow	7028kg/h
---------------------	----------

Air flow required for radiator	2100 m <sup>3</sup> /min
--------------------------------	--------------------------

Comprehensive Solutions For

**POWER GENERATION**

**MODEL: HC-BD1375-60**

**440V | 1800rpm | 60Hz**

**Fuel System**

Fuel consumption @ 100% (Prime Power) Load	203.6g/kWh	262.9L/h
Fuel consumption @ 75% (Prime Power) Load	200.8g/kWh	198.3L/h
Fuel consumption @ 50% (Prime Power) Load	205.6g/kWh	139.8L/h

**Oil System**

Total oil capacity	160L
Oil sump capacity	117-155L
Oil fuel consumption ratio based on engine fuel consumption data	≤ 0.3%

**Cooling System**

Coolant capacity	303L
Max water temperature	103°C

**MODEL: HC-BD1375-60**

**440V | 1800rpm | 60Hz**

## ALTERNATOR SPECIFICATION

Industrial alternators meet the requirements of the relevant parts of the BS5000, VDE 0530, NEMA MG1-22, IEC34, CSA 22.2-100 and AS1359.

### Alternator Data

Number of Phase	3
Connecting Type	3 Phase and 4 Wires, Y type connecting
Number of Bearing	1
Power Factor	0.8
Protection Class	IP23
Altitude	≤1000m
Exciter Type	Brushless exciting
Insulation Class/Temperature Rise	H/H
Telephone Influence Factor (TIF)	< 50
THF	< 2%
Alternator Capacity	1338kVA
Alternator Efficiency	95.6%

**MODEL: HC-BD1375-60**

**440V | 1800rpm | 60Hz**

## GENERATING SET DATA

Related range of voltage setting	$\geq \pm 5\%$
Steady-state voltage deviation	$\leq \pm 1\%$
Transient voltage deviation (100 % sudden power decrease)	$\leq +25\%$
Transient voltage deviation (sudden power increase)	$\leq -20\%$
Voltage recovery time (100 % sudden power decrease)	$\leq 6S$
Voltage recovery time (sudden power increase)	$\leq 6S$
Related range of frequency setting	0-5% adjustable
Steady-state frequency band	$\leq 1.5\%$
Transient frequency deviation (100 % sudden power decrease)	$\leq +12\%$
Transient frequency deviation (sudden power increase)	$\leq -10\%$
Frequency recovery time (100 % sudden power decrease)	$\leq 5S$
Frequency recovery time (sudden power increase)	$\leq 5S$

## STANDARD FEATURES

Standard auto control system	Exhaust system (including until muffler)	Documents
Oil drain valve	Starting batteries (maintenance-free & watering-free) with connective wires	


**MODEL: HC-BD1375-60**

**440V | 1800rpm | 60Hz**

**OPTIONS**

Daily fuel tank	Rainproof type	Remote control panel
Alternator heater	Soundproof type	Paralleling system
Spare parts	Trailer type	Switch box
Automatic transfer switch		


**DIMENSIONS & WEIGHT**

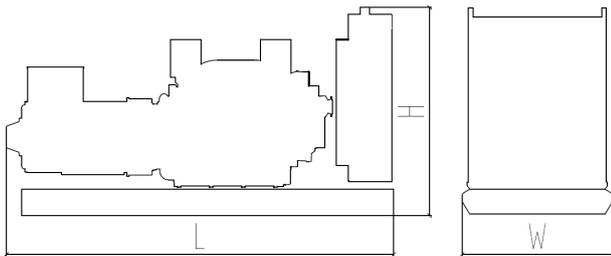

**Standard Configuration (open type)**

Overall Dimensions: 4650×2200×2430 mm

Weight: 8600 kg

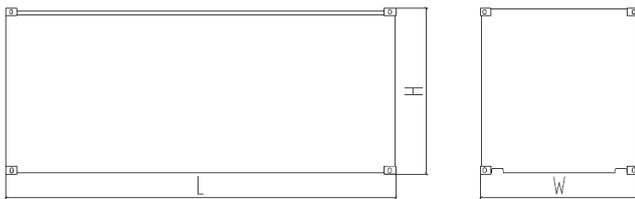

**Soundproof Type (standard 20'ft HQ container)**

Overall Dimensions: 6058×2438×2896 mm

Weight: 13600 kg

*Specifications are subject to change without notice.*