


DERSONN[®]
Lighting your life

60x 60

Revolution LED Panel

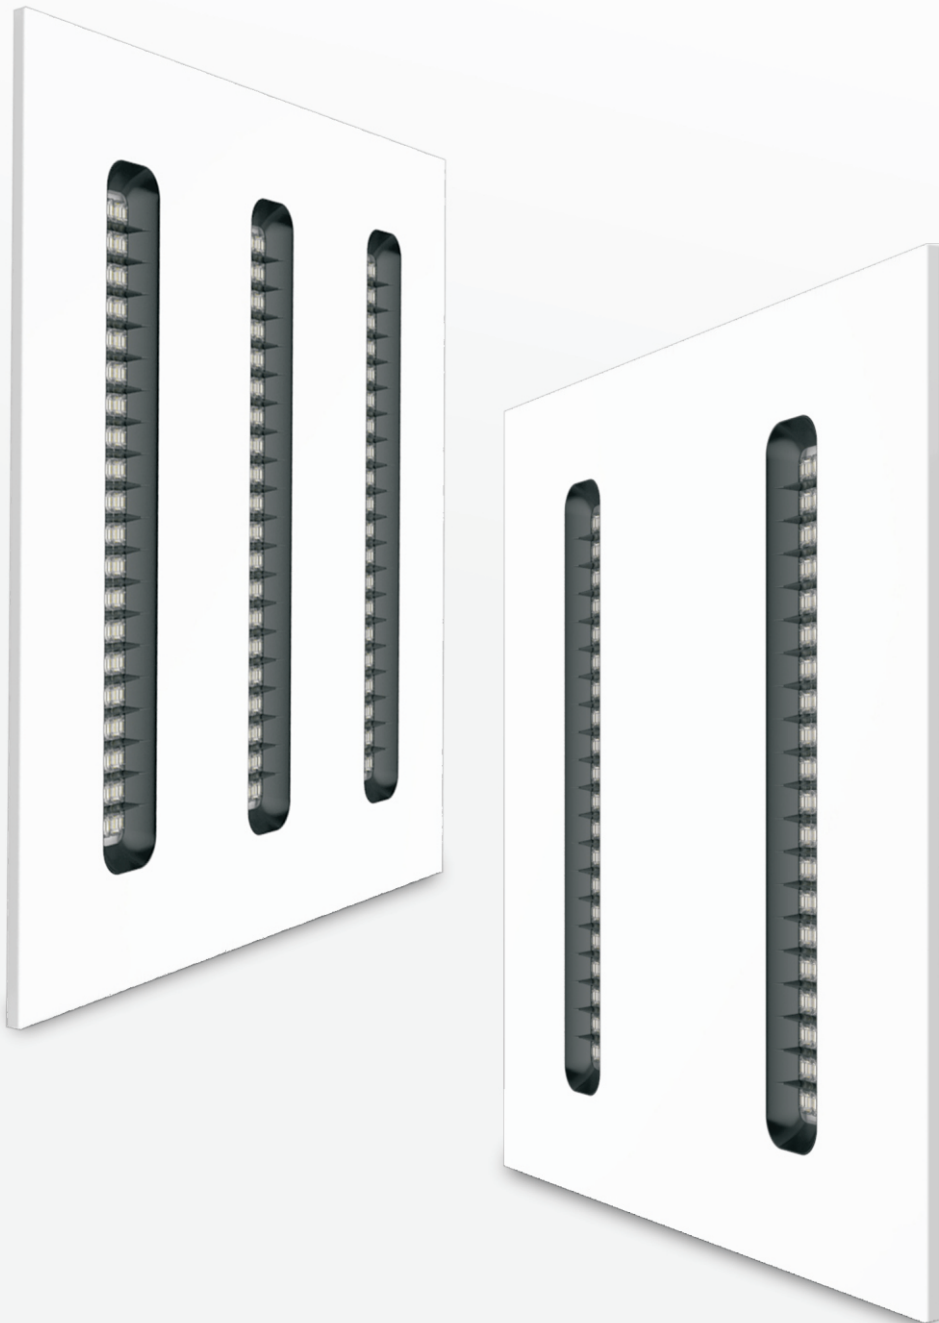

Ultra Low Glare LED Panel Luminaire

The Revolution panel is engineered for a wide range of applications and boasts ultra high efficiency while being classed as a low glare product. It utilises premium optic and reflector technology with integrated structure, enabling a superior life product. High quality ,high efficiency , perfect replacements for Grille lamp and normal led panel light.

Product Specification

Model Name	60×60 20W Panel 2 Rows	60×60 30W Panel 3 Rows
Net Power (Watts)	20W	30W
System Efficacy	Up to 130lm/W	
Total Lumen Flux (Lm)	2600lm	3900lm
LED Brand	Bridgelux 2835	
CCT	3000K ,4000K	
CCT Binning(SDCM)	3-Step	
Color Rendering Index(CRI)	90	
Optic Options	90Degree	
Reflector Options	White or black	
Unified Glare Rating (UGR)	<16	
IP Rating	IP54	
IK Rating	NA	
LED Lifespan(TM-21-10K)	50000hours	
Driver	Outside built (Osram HEP etc)	
Power Factor	0.95 Typical	
Non-dim or Dimmable	Yes (Option)	
DALI&0-10V &Intelligent	Yes (Option)	
Certificate	SAA RCM CE ROHS ENEC TUV UKCA	
Warranty	6years	
Lamp Body Material	Iron ,PC, Aluminum	
Installation Way	Suspension Kit,Recessed,Surface mount	
Installation Parts	Yes (Option)	
Operating Temperature	-20℃ ~ +50℃	
Dimensions(mm)	595×595×34.8	

Models (Sku Code Example As Below)

DSRP - 30W - 4K + F90 595X595

Model	Power	CCT	Beam	Size	Add Ons
DSRP	30W 30W Total Power 20W 20W Total Power	4K 4000K Pure 3K 3000K Pure	F90 90° Lens	1195X595 Full Panel 595X595 Square Panel 1195X295 Rectangle Panel	NA NA Options Currently

Dimensions

