



Commercial status

To be discontinued on: 31 December 2022

End-of-service soon on: 31 December 2030

❗ To be discontinued

Main

Range of product	Modicon Quantum automation platform
Product or component type	VAC discrete input modules
Software name	ProWORX 32 Concept Unity Pro
Discrete input number	32

Complementary

Group of channels	4
Addressing requirement	2 input words
Discrete input voltage	24 V AC
Input current	11.1 mA at 57...63 Hz 13.2 mA at 47...53 Hz
Voltage state 1 guaranteed	12...30 V AC at 57...63 Hz 14...30 V AC at 47...53 Hz
Voltage state 0 guaranteed	0...5 V at 57...63 Hz 0...5 V at 47...53 Hz
Input impedance	2600 Ohm capacitive at 57...63 Hz 3100 Ohm capacitive at 47...53 Hz
Network frequency limits	47...63 Hz
Maximum leakage current	1.9 mA
Absolute maximum input	30 V continuous 32 V 10 s 50 V 1 cycle
Response time	4.9...0.75 ms x line cycle Off-On 7.3...12.3 ms On-Off
Isolation between group	1780 Vrms for 1 minute
Isolation between group and bus	1780 Vrms for 1 minute
Bus current requirement	250 mA

Maximum power dissipation in W	10.9 W
Local signalling	1 LED (green)bus communication is present (Active): 1 LED (red)external fault detected (F): 32 LEDs (green)input status:
Marking	CE
Module format	Standard
Net weight	0.34 kg

Environment

Standards	UL 508 CSA C22.2 No 142
Product certifications	FM Class 1 Division 2 CUL
Resistance to electrostatic discharge	4 kV contact conforming to IEC 801-2 8 kV on air conforming to IEC 801-2
Resistance to electromagnetic fields	10 V/m 80...2000 MHz conforming to IEC 801-3
Ambient air temperature for operation	0...60 °C
Ambient air temperature for storage	-40...85 °C
Relative humidity	95 % without condensation
Operating altitude	<= 5000 m

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	475 g
Package 1 Height	5 cm
Package 1 width	16.5 cm
Package 1 Length	31.5 cm
Unit Type of Package 2	S03
Number of Units in Package 2	7
Package 2 Weight	3.925 kg
Package 2 Height	30 cm
Package 2 width	30 cm
Package 2 Length	40 cm

Offer Sustainability


Sustainable offer status	Green Premium product
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty

Warranty	18 months
----------	-----------

Racks for Modules Mounting


Dimensions of Modules and Racks

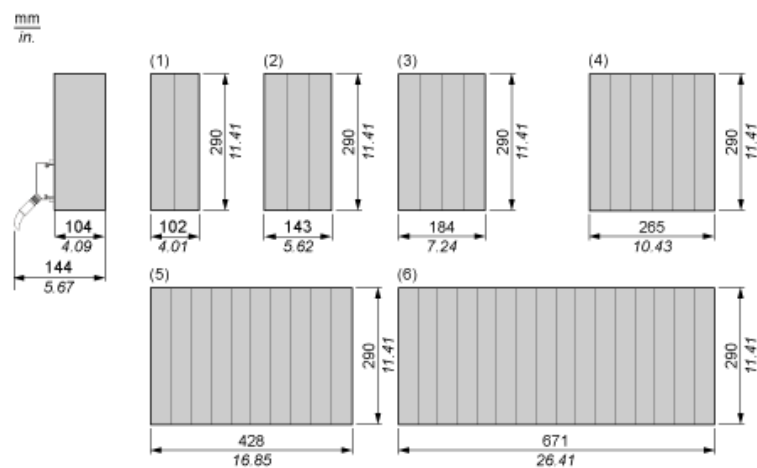

- (1) 2 slots
- (2) 3 slots
- (3) 4 slots
- (4) 6 slots
- (5) 10 slots
- (6) 16 slots

24 Vac Discrete Input Module

Wiring Diagram

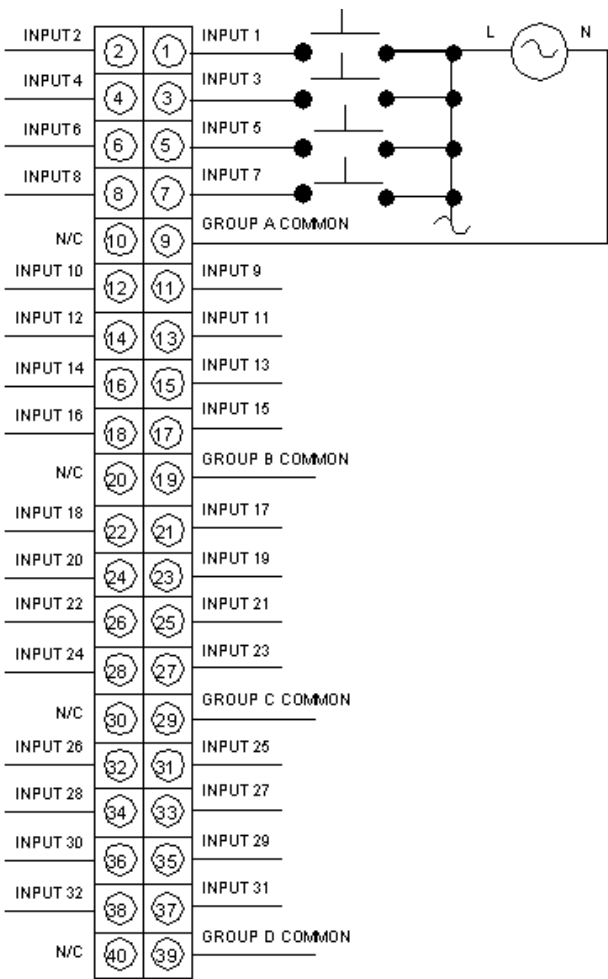

N/C Not Connected

140DAI35300 is replaced by:



Standard environment BMXDAI1602

discrete input module X80 - 16 inputs - 24V AC/DC positive or negative

Qty 1

Reason for Substitution: End of life | Substitution date: 30 September 2019 | Linking to group 1