



LEAO® FLOORING SYSTEM

STRONG & DURABLE



Features & Benefits

- Fire resistance, corrosion resistance, moisture resistance
- During construction, it can be exposed for up to 90 days
- Joints, fast installation
- Easy to lay directly without a mating layer
- Can be used as a light partition floor
- Can be installed with a screwdriver
- Belongs to Fire Grade A material
- Certified by ASTM, AS / NZS, UKCA, CE

www.leao-board.com



Scan the code to unlock more product information



HIGH PERFORMANCE

LEAO® flooring is a high-performance structural floor that not only has high installation efficiency but also has the solid effect of concrete. This floor can fully meet the comprehensive performance requirements of residential and light commercial floors. Create a comfortable, quiet, and solid room atmosphere, and customers can use it with confidence for a long time.

DURABILITY

LEAO® flooring has good dimensional stability and will not expand or contract due to moisture or temperature changes, so it is an ideal substrate for tile installation in humid environments or for most decorative flooring needs.

EASE OF CONSTRUCTION

After 90 days of exposure to sunlight and rain, the performance of LEAO® flooring will not be affected.

It adopts mortise and tenon joint, which does not require locking operation, thus improving the installation efficiency.



The advanced silicon rock formula is suitable for use with gun nails.

The tiles can be laid directly without the need for underlayment, avoiding obvious unevenness between the tiles.

PEACE OF MIND

The base material is stable in size, the floor is strong, durable, fire-resistant, anti-corrosion, and will not be damaged by moisture. It is a reliable fire-resistant A-class non-combustible material.

TILE, VINYL & CARPET APPLICATION

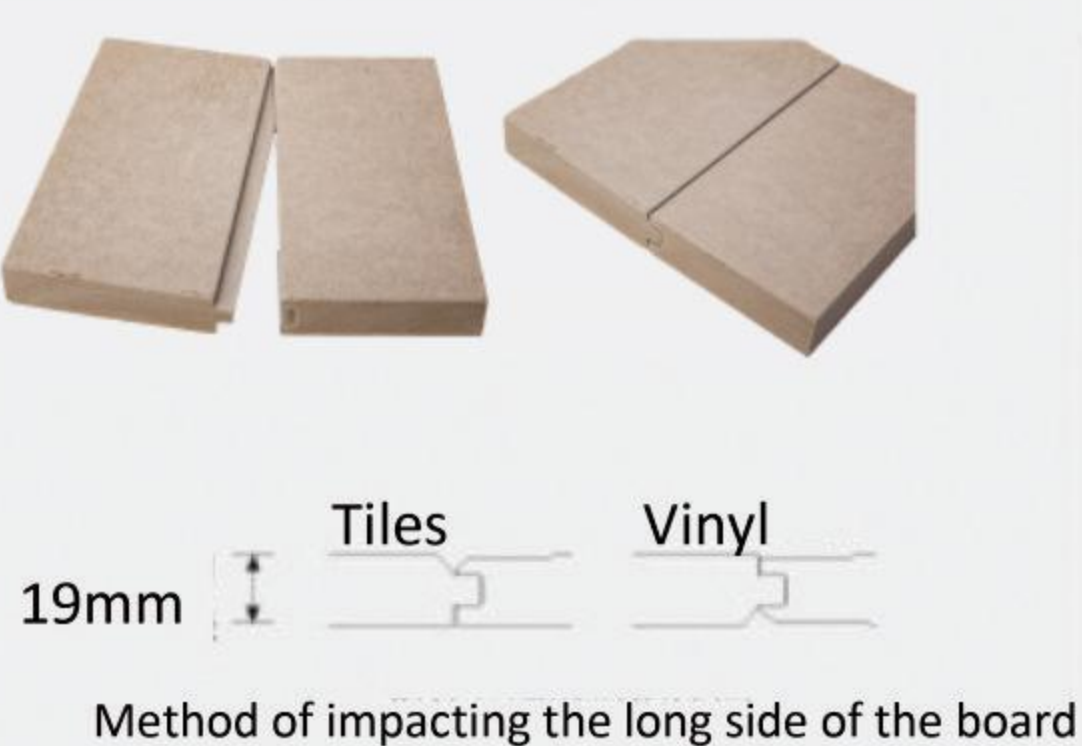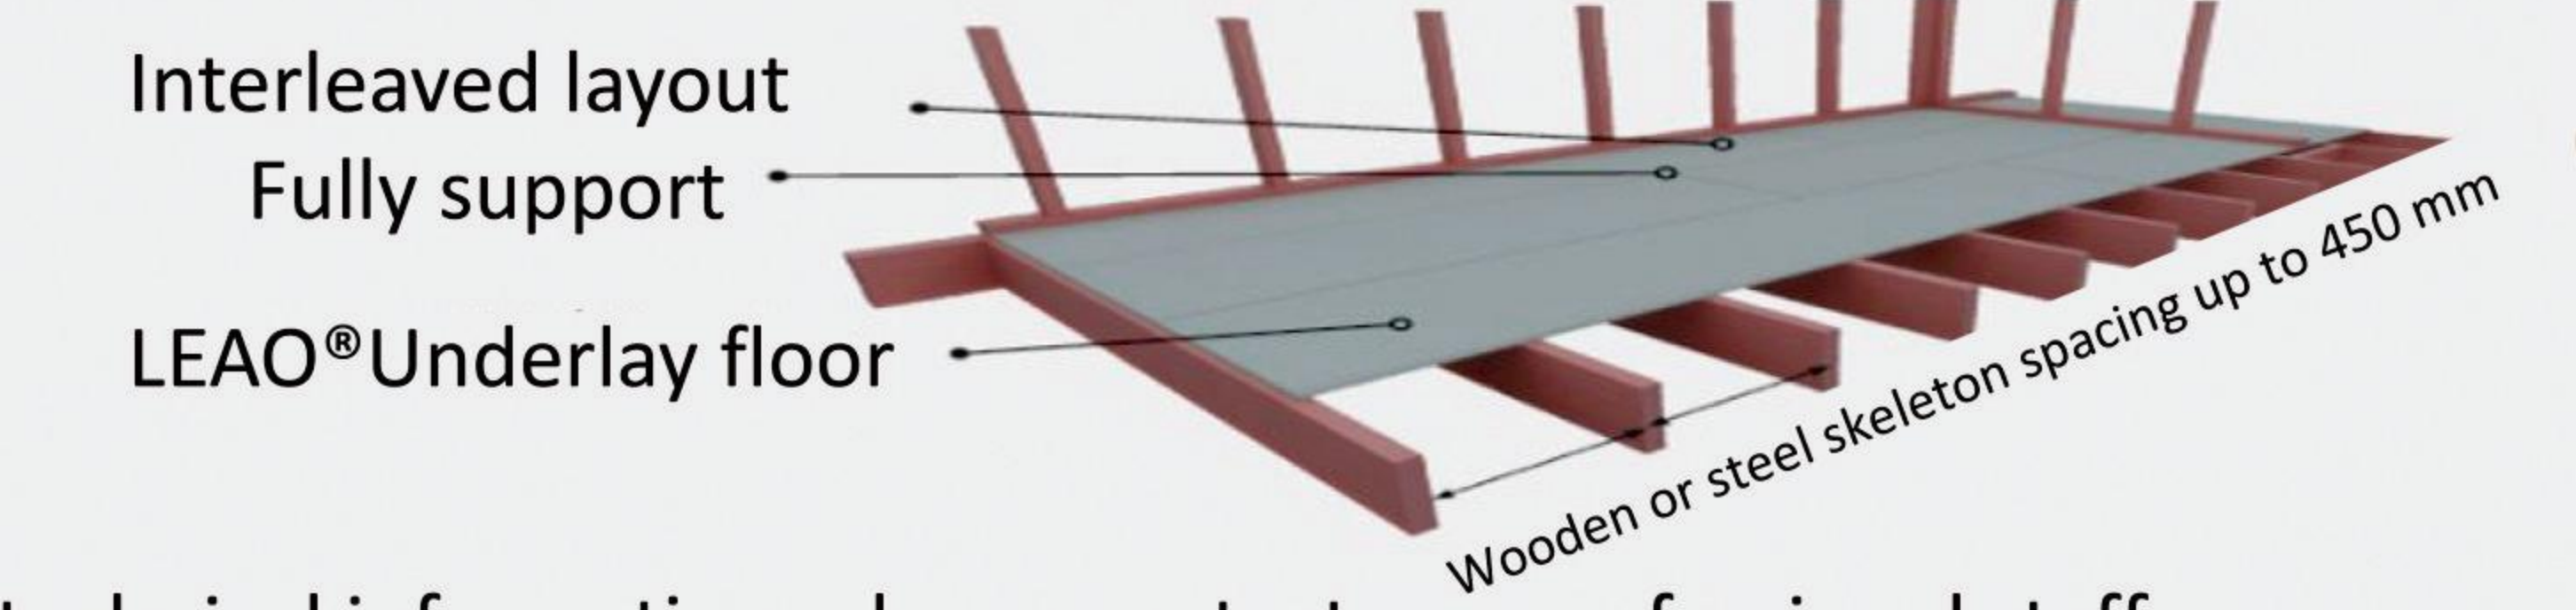


For more technical information, please contact our professional staff.

NEW PRODUCT

LEAO® Floor Plank

Tongue-and-groove joint

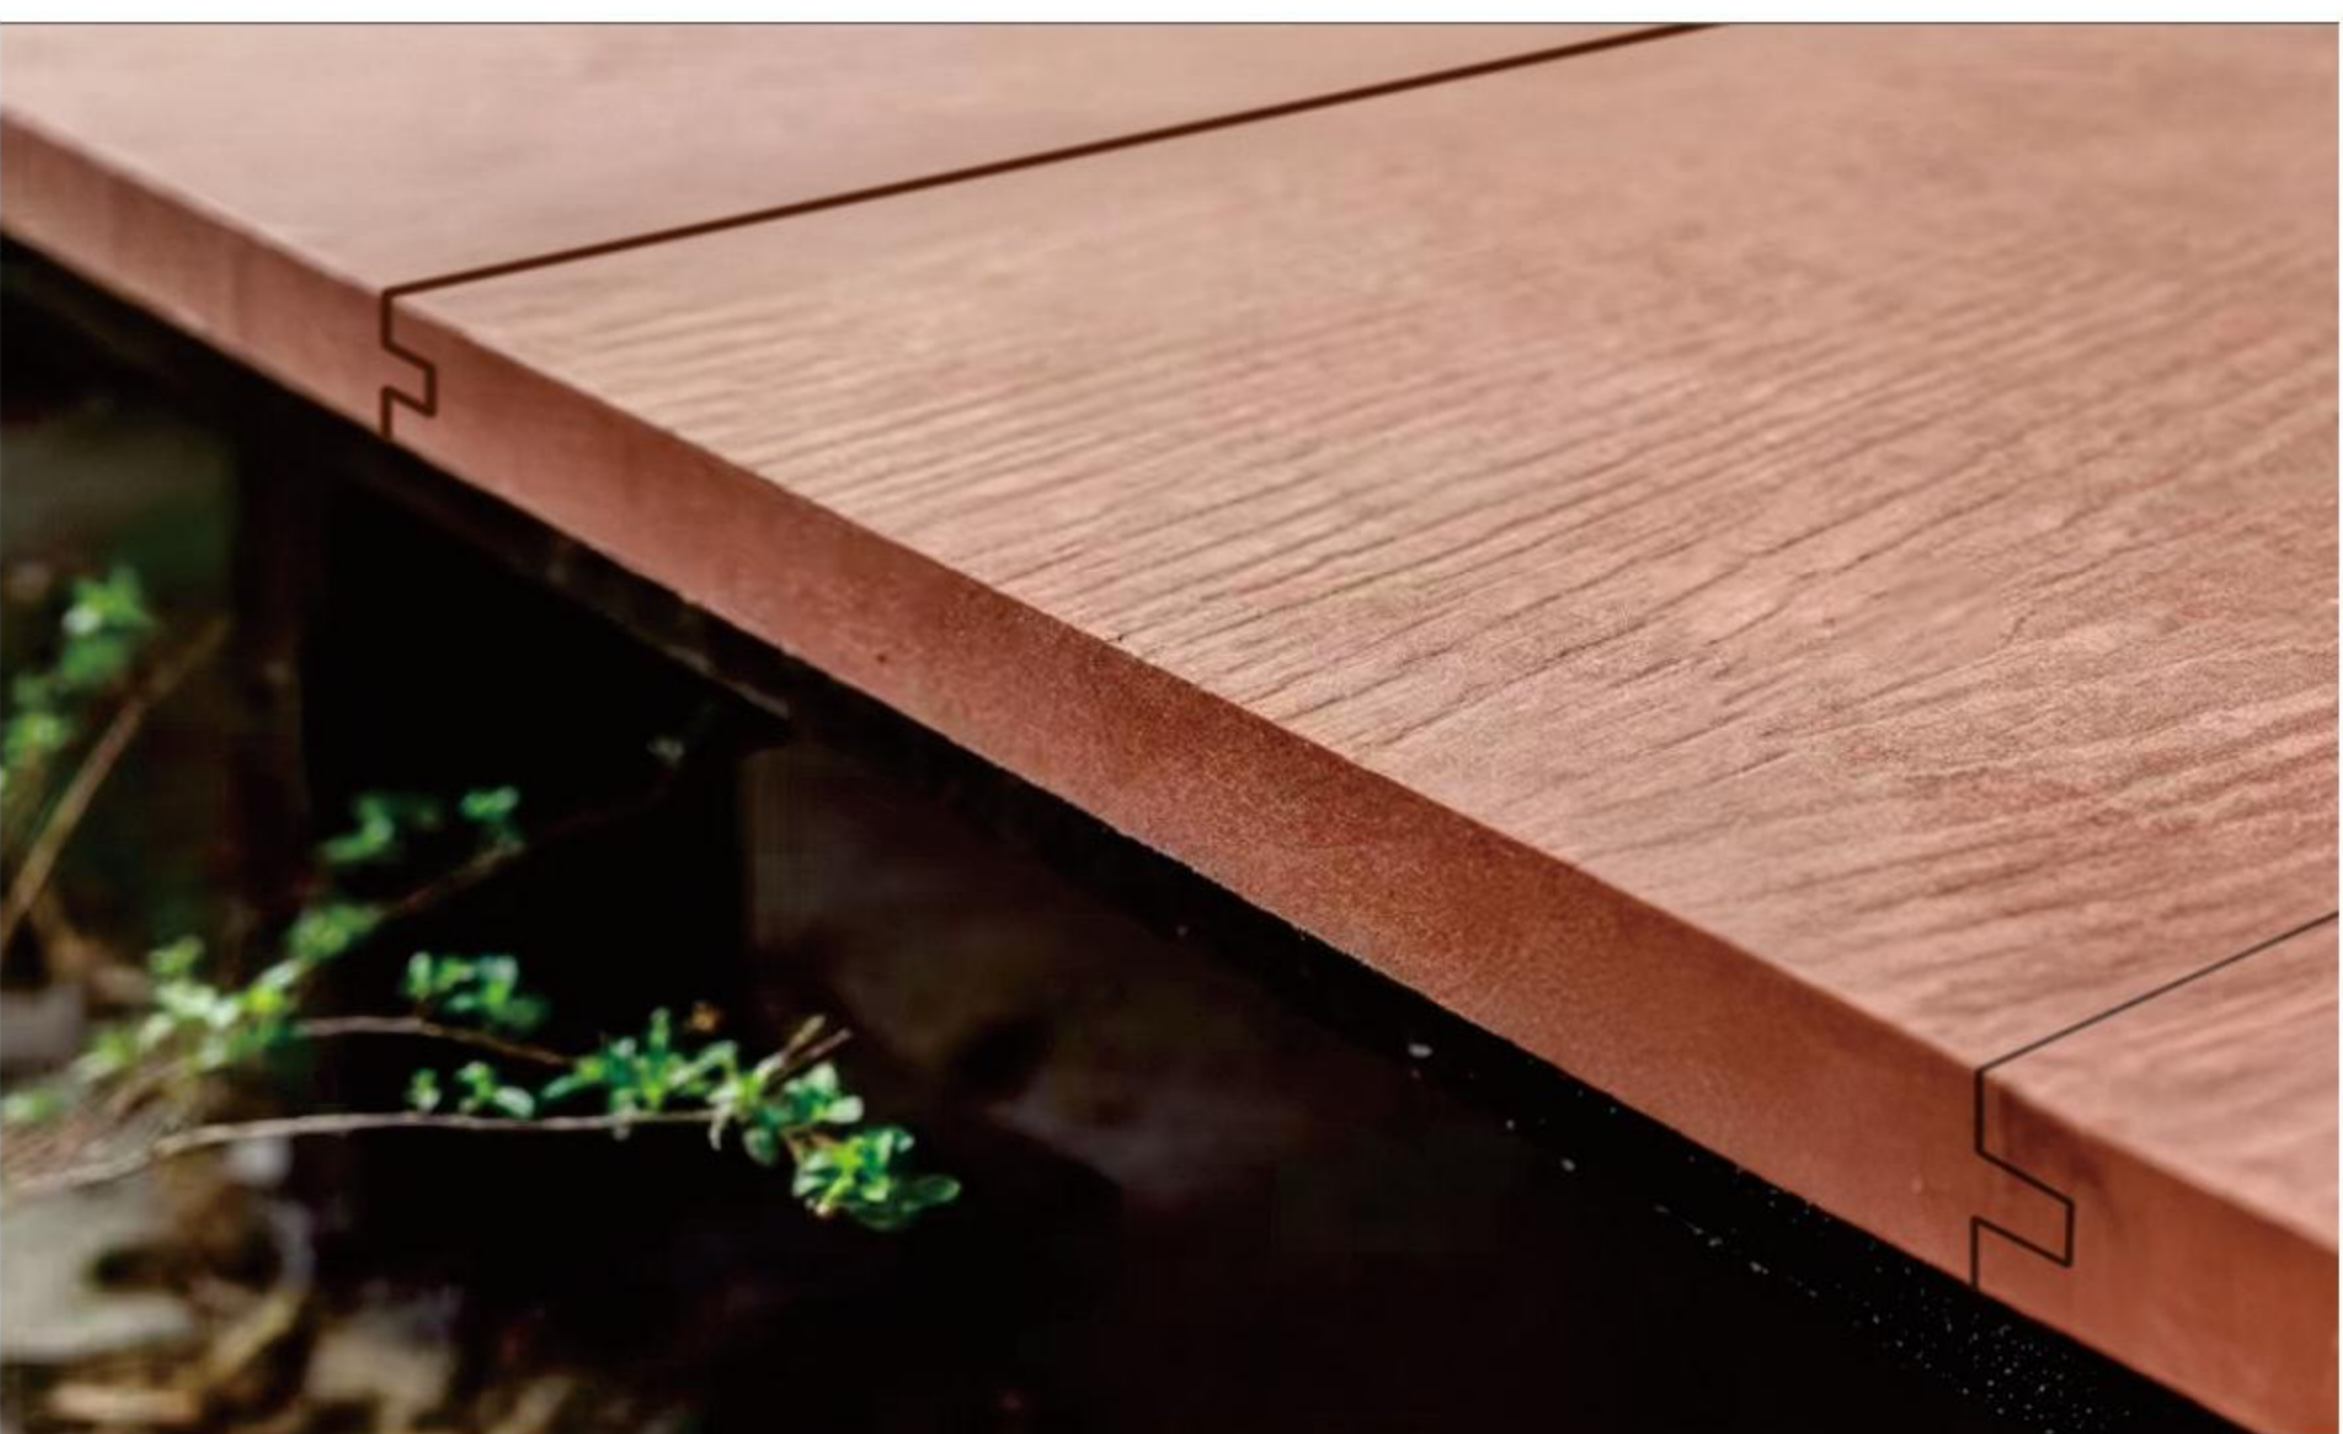

Features & Benefits:

- Natural texture, natural beauty
- Water resistant, fire resistant and durable
- Not distorted and stable in size
- Citrix Splice, Quick Installation



Product information:

Edge	Texture	Color	Size (mm)
V Edge	Cedar Sand	Red	19x150x3000
Square Edge		Light Oak	19x200x3000
		Golden Teak	19x300x3000
		Brown	19x300x3000

Color can be customized



Product information:

Edge	Texture	Color	Size (mm)
Tongue Groove	Cedar Sand	Modern Gray	19x200x3000
		Tropical Brown	19x300x3000
		Wine Red	19x150x3000

*Color can be customized



Tongue-and-groove joint

