

Broadband High Power Amplifier Module (SSPA)

REV. 3.0 2024.09.19

0.7-2.7GHz/100Watt/Module

Model Number: KB0727M50A

The model KB0727M50A is a multi-octave high power amplifier operating between 0.7 GHz and 2.7GHz and offering a wide dynamic Range with 100 Watts typical saturated power. The employment of gallium nitride (GaN) in manufacturing ensures this module state-of-the-art power performance with excellent power-to-volume ratio. It is ideal for jamming, EMC, test and measurement applications.

FEATURES:

- Small Size and Light Weight
- Broadband & High Power
- 50 Ohms Input and Output Matched
- Built-In Control and Protection Circuits

ELECTRICAL SPECIFICATIONS @ +28.0VDC, 25°C, 50Ω

Parameter	Symbol	Min	Typ	Max	Units
Operating Frequency	BW	700		2700	MHz
RF Output Power @P _{IN} =0dBm	P _{SAT}		100		Watt
Power Gain	G _p		50		dB
Power Gain Flatness	Δ G _p		±2.5		dB
Input Return Loss	S ₁₁			-10	dB
Harmonics @60W	H		-10	-8	dBc
Spurious Signals	Spur		-60		dBc
In/Output Impedance	Impedance		50		Ω
Operating Voltage	V _{DC}	24	28	32	Volt
DC Current @80W	I _{DD}		13		Amp
Switching Time @1kHz TTL	Ton/off		2	5	uS

MECHANICAL SPECIFICATIONS

Parameter	Value	Units	Notes
Dimensions	180x90x25 [7.08x3.54x0.98]	mm [inch]	Maximum
Weight	1.20 [2.65]	kg [lbs]	Maximum
RF Connectors Input	SMA, Female		
RF Connectors Output	SMA, Female		
DC Interface Connector	D-Sub 9-Pin, Male		
Cooling	External Heatsink Required (Not Supplied)		

ENVIRONMENTAL CHARACTERISTICS (Design to Meet)

Parameter	Minimum	Typical	Maximum	Units	Notes
Operating Temperature	-40		60	°C	
Non-operating Temperature	-45		85	°C	Storage
Relative Humidity (non-condensing)			95	%	

ABSOLUTE MAXIMUM RATING

Input RF drive level without damage	+10 dBm (Max)
Load VSWR @ P _{OUT} =70W	∞ @ all load phase & amplitude for duration of 1 minute; 3:1 @ all load phase & amplitude continuous.
Over Temperature	85°C @ heatsink [restored @ 60°C]

Focus on Your Application

Chengdu KeyLink Wireless Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech (West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761

>> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com

>> www.keylinkmw.com

Specifications subject to change without notice

Broadband High Power Amplifier Module (SSPA)

REV. 3.0 2024.09.19


0.7-2.7GHz/100Watt/Module

Model Number: KB0727M50A

DC INTERFACE CONNECTOR

Pin #	Description	Specifications
1	VDD	28VDC
2	VDD	28VDC
3	VDD	28VDC
4	ENABLE	Amplifier Enable: TTL Logic High (3.3V) (Internally Pulled-Low)
5	CURRENT SENSE	Analog voltage relative to IDD @ 50mV per Ampere
6	GND	Ground
7	GND	Ground
8	GND	Ground
9	TEMP SENSE	Analog voltage relative to Module's Temperature @ 10 mV/°C

OUTLINE DRAWING (All dimensions in mm [inch])

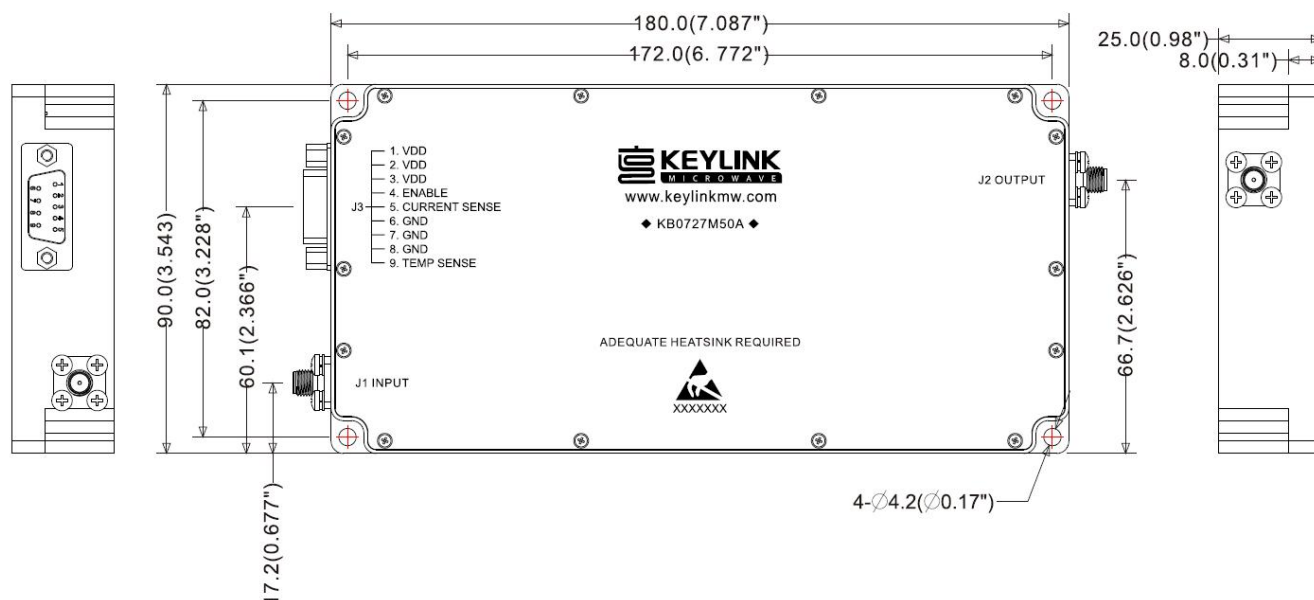

Focus on Your Application

Chengdu KeyLink Wireless Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech (West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761

>> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com

>> www.keylinkmw.com

Specifications subject to change without notice


Broadband High Power Amplifier Module (SSPA)

REV. 3.0 2024.09.19

0.7-2.7GHz/100Watt/Module

Model Number: KB0727M50A

TYPICAL PERFORMANCE PLOTS (FOR REFERENCE ONLY)

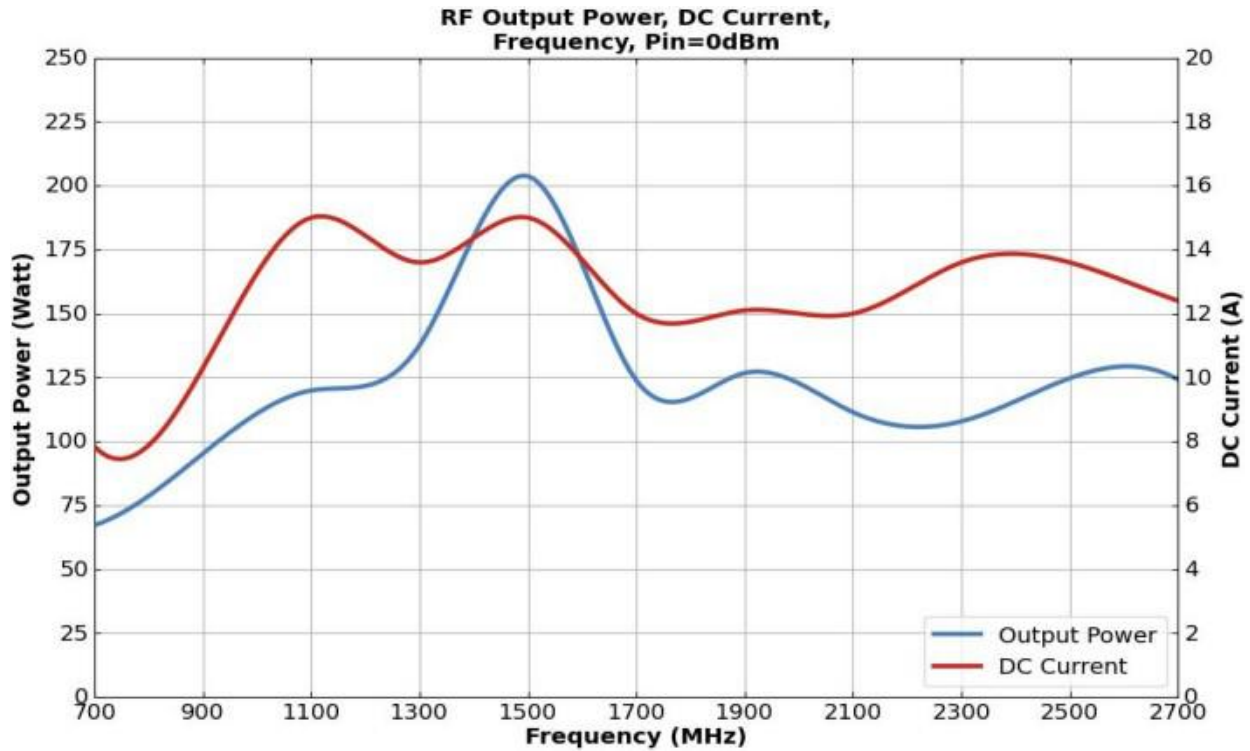

Note: Adequate heatsink required.

Focus on Your Application

Chengdu KeyLink Wireless Technology Co., Ltd.

>> 5-2, Huidu Headquarters Park, High-Tech (West) Zone, Chengdu, 611731, P. R. China

>> Phone: +86(28)87870761

>> Fax: +86(28)87883266

>> Email: sales@keylinkmw.com

>> www.keylinkmw.com

Specifications subject to change without notice