
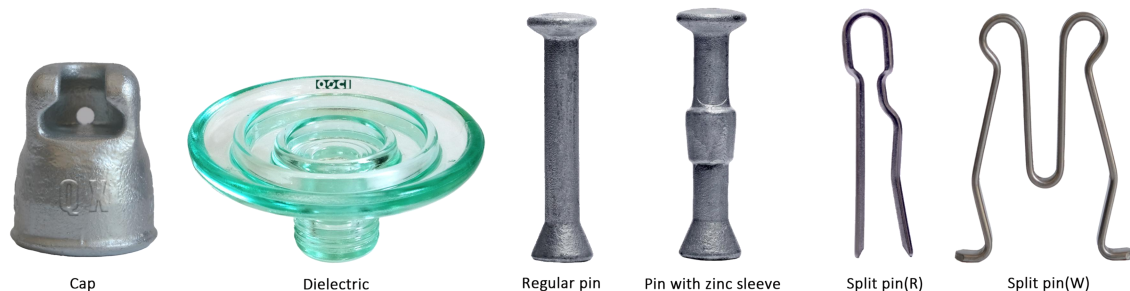


STANDARD PROFILE

40kn Suspension Tempered Glass Insulator U40b

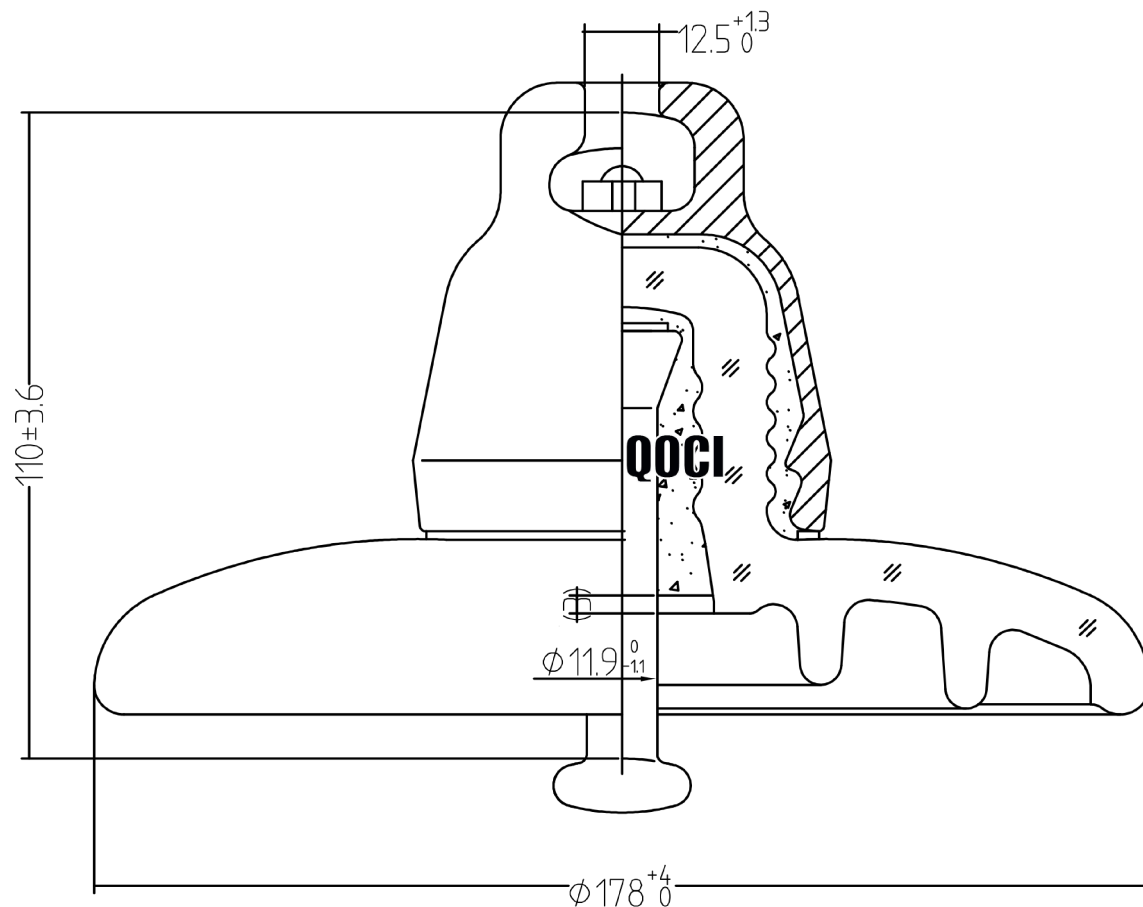

IEC designation		U40B/110
Mechanical failing load	kn	40
Diameter D	mm	178
Height H	mm	110
Creepage distance L	mm	190
Socket coupling	mm	11
Wet power frequency withstand voltage	kv	25
Dry lightning impulse withstand voltage	kv	50
Power frequency puncture voltage	kv	90
Radio interference voltage(10kV 1MHz)	μv	50
Corona visual test	kv	18/22
Power frequency electric arc voltage	ka	0.12s/20kA
Impulse puncture voltage	P.U	2.8
Net weight per unit	kg	2.1