


STANDARD PROFILE

70kn Suspension Tempered Glass Insulator U70b



IEC designation		U70BS	U70BL
Mechanical failing load	kn	70	70
Diameter D	mm	255	255
Height H	mm	127	146
Creepage distance L	mm	320	320
Socket coupling	mm	16	16
Wet power frequency withstand voltage	kv	40	40
Dry lightning impulse withstand voltage	kv	100	100
Power frequency puncture voltage	kv	130	130
Radio interference voltage(10kv 1MHz)	μv	50	50
Corona visual test	kv	18/22	18/22
Power frequency electric arc voltage	ka	0.12s/20kA	0.12s/20kA
Impulse puncture voltage	P.U	2.8	2.8
Net weight per unit	kg	3.5	3.6

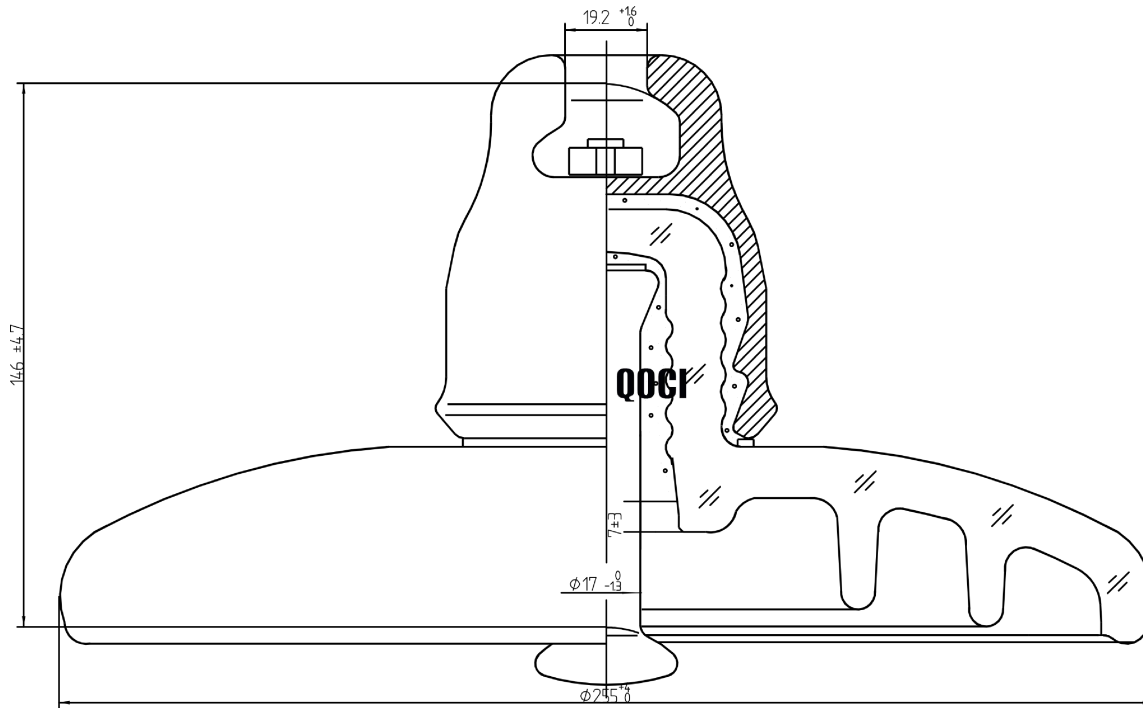