
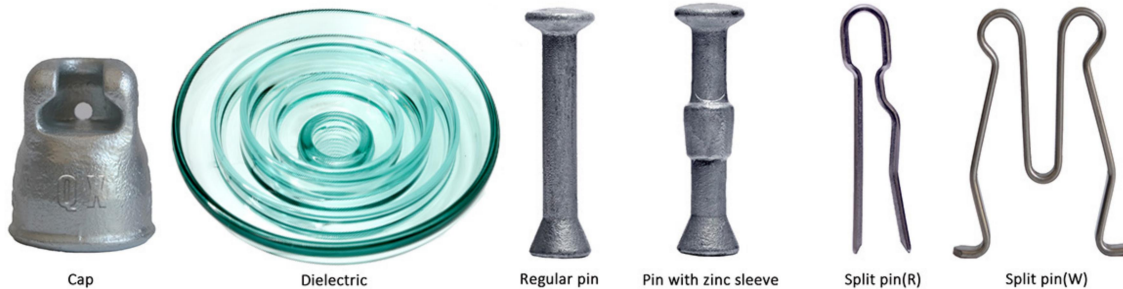


STANDARD PROFILE

550kn Suspension Tempered Glass Insulator U550b

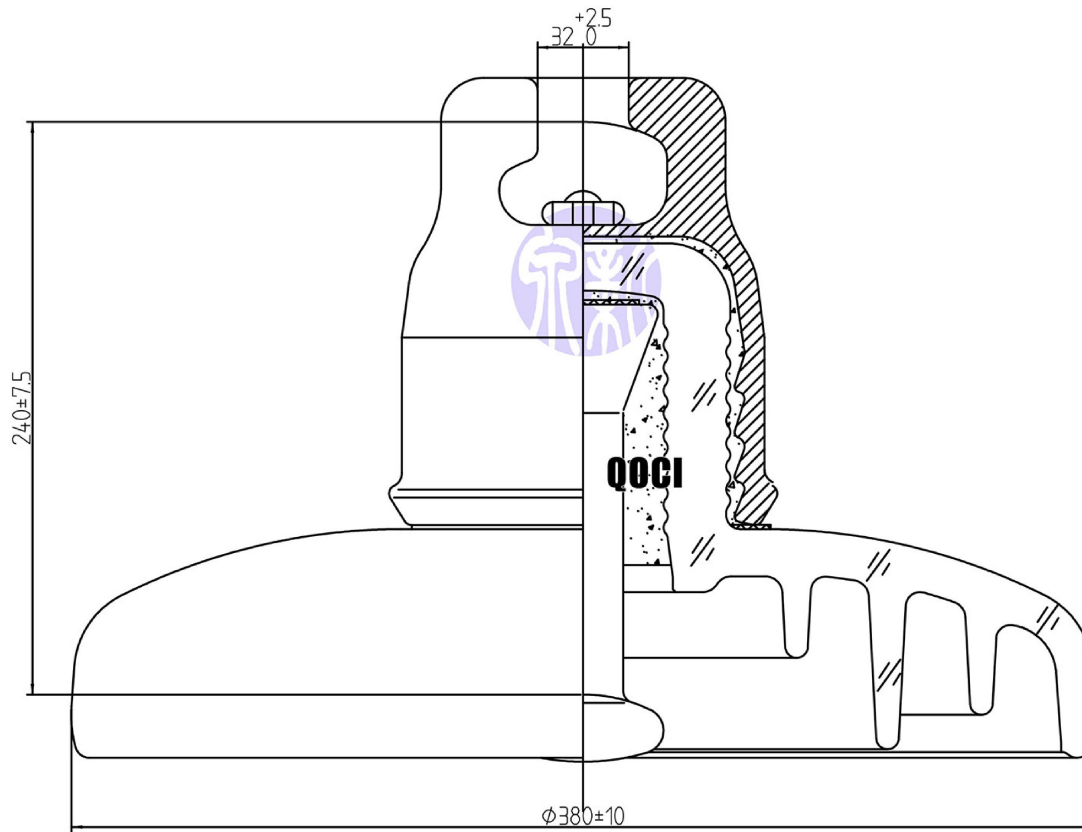

IEC designation		U550B/240
Mechanical failing load	kn	550
Diameter D	mm	380
Height H	mm	240
Creepage distance L	mm	600
Socket coupling	mm	32
Wet power frequency withstand voltage	kv	55
Dry lightning impulse withstand voltage	kv	140
Power frequency puncture voltage	kv	140
Radio interference voltage(10kv 1MHz)	μv	50
Corona visual test	kv	18/22
Power frequency electric arc voltage	ka	0.12s/20Ka
Impulse puncture voltage	P.U	2.8
Net weight per unit	kg	21.5