



EXTERNAL SHED PROFILE

210kn Double-Shed Fog Type Glass Insulator U210BD

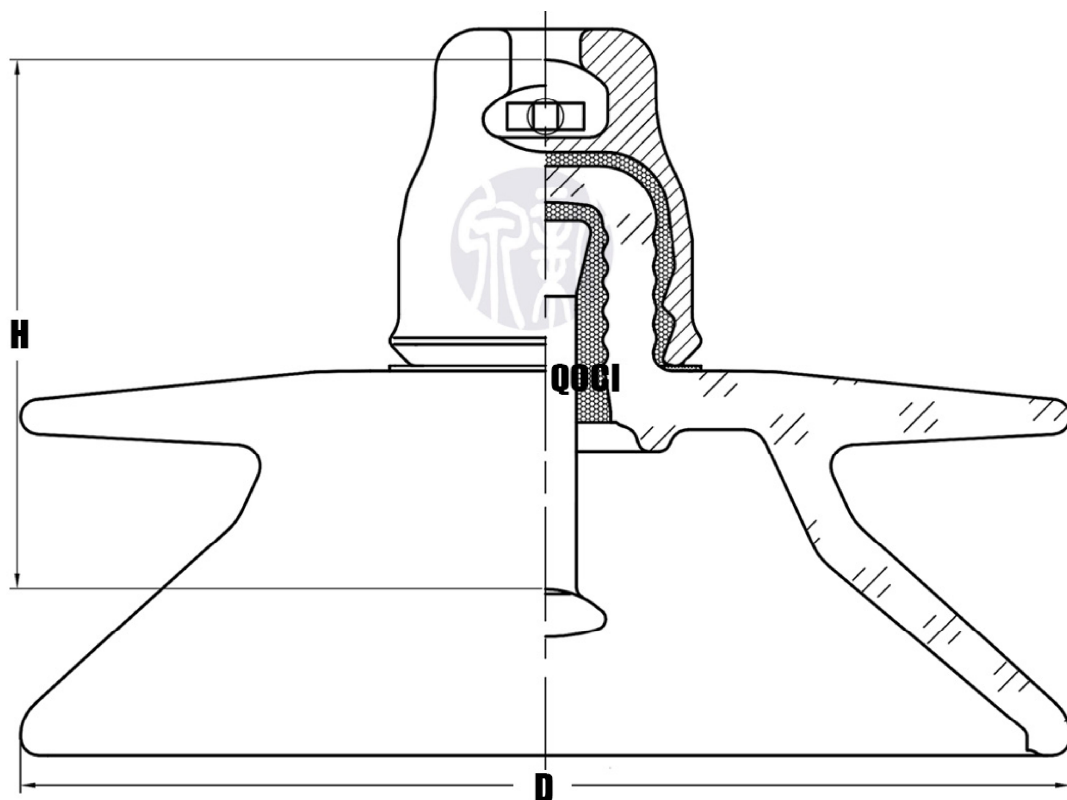

IEC designation		U210BD	U210BD1
Mechanical failing load	kn	210	210
Diameter D	mm	300	340
Height H	mm	170	170
Creepage distance L	mm	450	550
Socket coupling	mm	20/24	20/24
Wet power frequency withstand voltage	kv	45	50
Dry lightning impulse withstand voltage	kv	120	135
Power frequency puncture voltage	kv	130	130
Radio interference voltage(10kV 1MHz)	μv	50	50
Corona visual test	kv	18/22	18/22
Power frequency electric arc voltage	ka	0.12s/20ka	0.12s/20ka
Impulse puncture voltage	P.U	2.8	2.8
Net weight per unit	kg	7.5	9.5

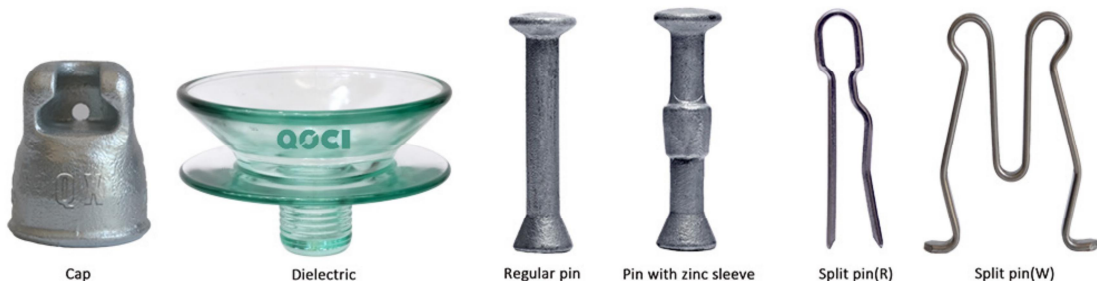

Cap

Dielectric

Regular pin

Pin with zinc sleeve

Split pin(R)

Split pin(W)