


STANDARD PROFILE

240kn Suspension Tempered Glass Insulator U240b



IEC designation		U240B/170
Mechanical failing load	kn	240
Diameter D	mm	280
Height H	mm	170
Creepage distance L	mm	400
Socket coupling	mm	20/24
Wet power frequency withstand voltage	kv	45
Dry lightning impulse withstand voltage	kv	110
Power frequency puncture voltage	kv	130
Radio interference voltage(10kV 1MHz)	μv	50
Corona visual test	kv	18/22
Power frequency electric arc voltage	ka	0.12s/20Ka
Impulse puncture voltage	P.U	2.8
Net weight per unit	kg	7.2

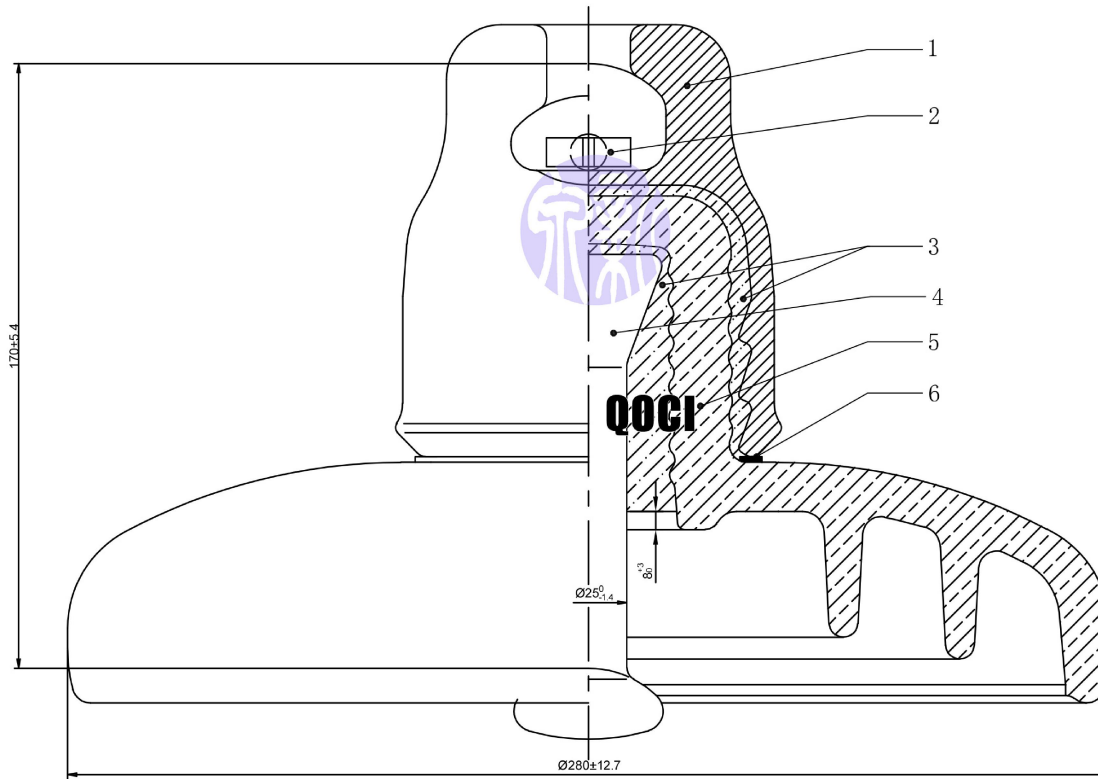

Cap



Dielectric



Regular pin



Pin with zinc sleeve



Split pin(R)



Split pin(W)