


ANTI-POLLUTION PROFILE

240kn Suspension Tempered Glass Insulator U240BP



IEC designation		U240BP
Mechanical failing load	kn	240
Diameter D	mm	320
Height H	mm	170
Creepage distance L	mm	550
Socket coupling	mm	20/24
Wet power frequency withstand voltage	kv	55
Dry lightning impulse withstand voltage	kv	140
Power frequency puncture voltage	kv	130
Radio interference voltage(10kV 1MHz)	μv	50
Corona visual test	kv	18/22
Power frequency electric arc voltage	ka	0.12S/20kA
Impulse puncture voltage	P.U	2.8
Net weight per unit	kg	10.2

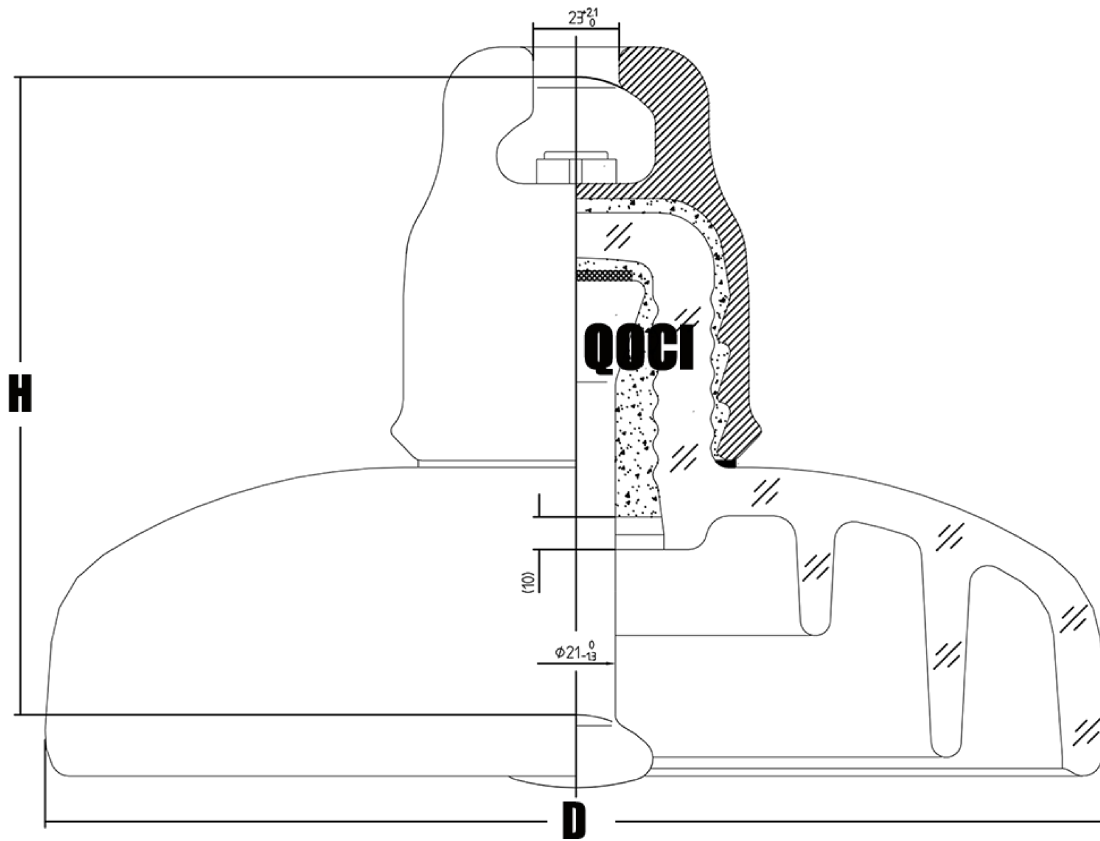