


STANDARD PROFILE

300kn Suspension Tempered Glass Insulator U300b



Cap

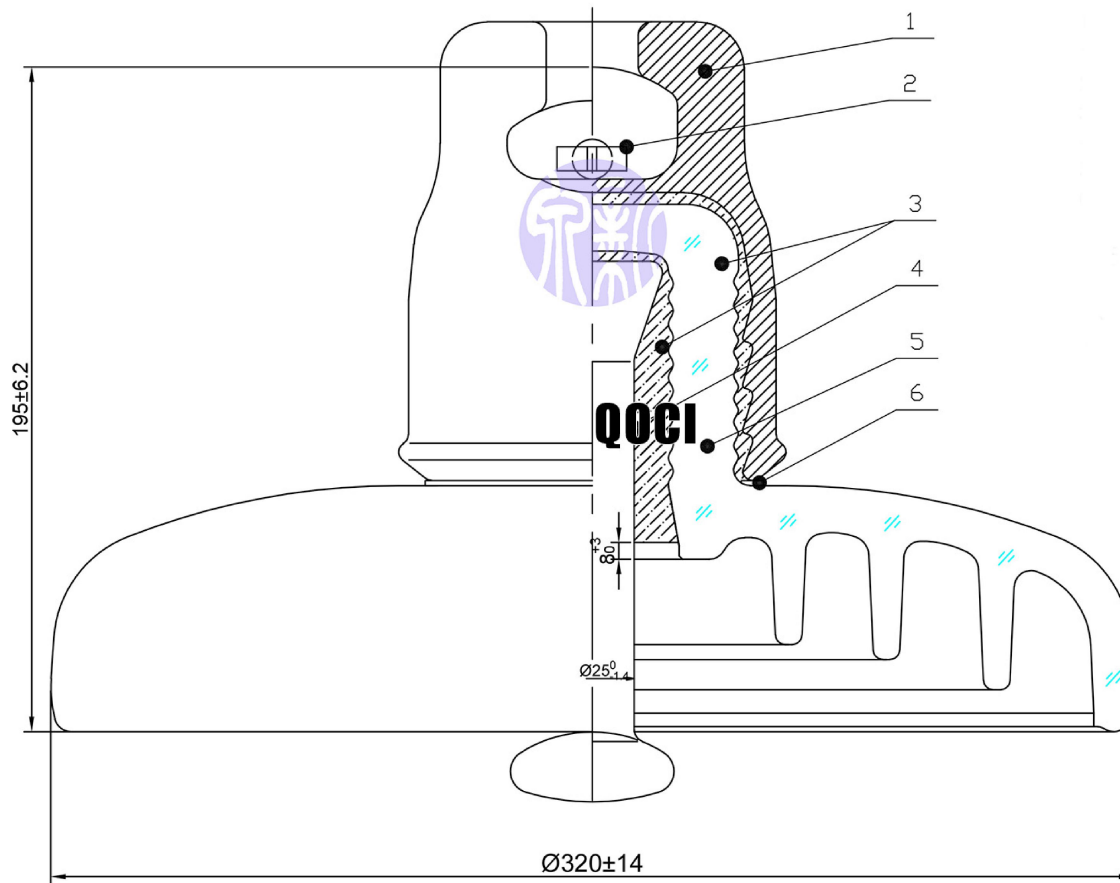

Dielectric



Regular pin



Pin with zinc sleeve



Split pin(R)



Split pin(W)

IEC designation		U300B/195
Mechanical failing load	kn	300
Diameter D	mm	320
Height H	mm	195
Creepage distance L	mm	485
Socket coupling	mm	24
Wet power frequency withstand voltage	kv	50
Dry lightning impulse withstand voltage	kv	130
Power frequency puncture voltage	kv	130
Radio interference voltage(10kV 1MHz)	μv	50
Corona visual test	kv	18/22
Power frequency electric arc voltage	ka	0.12s/20Ka
Impulse puncture voltage	P.U	2.8
Net weight per unit	kg	10.6