


STANDARD PROFILE

420kn Suspension Tempered Glass Insulator U420b



IEC designation		U420B/205
Mechanical failing load	kn	420
Diameter D	mm	360
Height H	mm	205
Creepage distance L	mm	550
Socket coupling	mm	28
Wet power frequency withstand voltage	kv	80
Dry lightning impulse withstand voltage	kv	140
Power frequency puncture voltage	kv	140
Radio interference voltage(10kv 1MHz)	μv	50
Corona visual test	kv	18/22
Power frequency electric arc voltage	ka	0.12s/20Ka
Impulse puncture voltage	P.U	2.8
Net weight per unit	kg	16

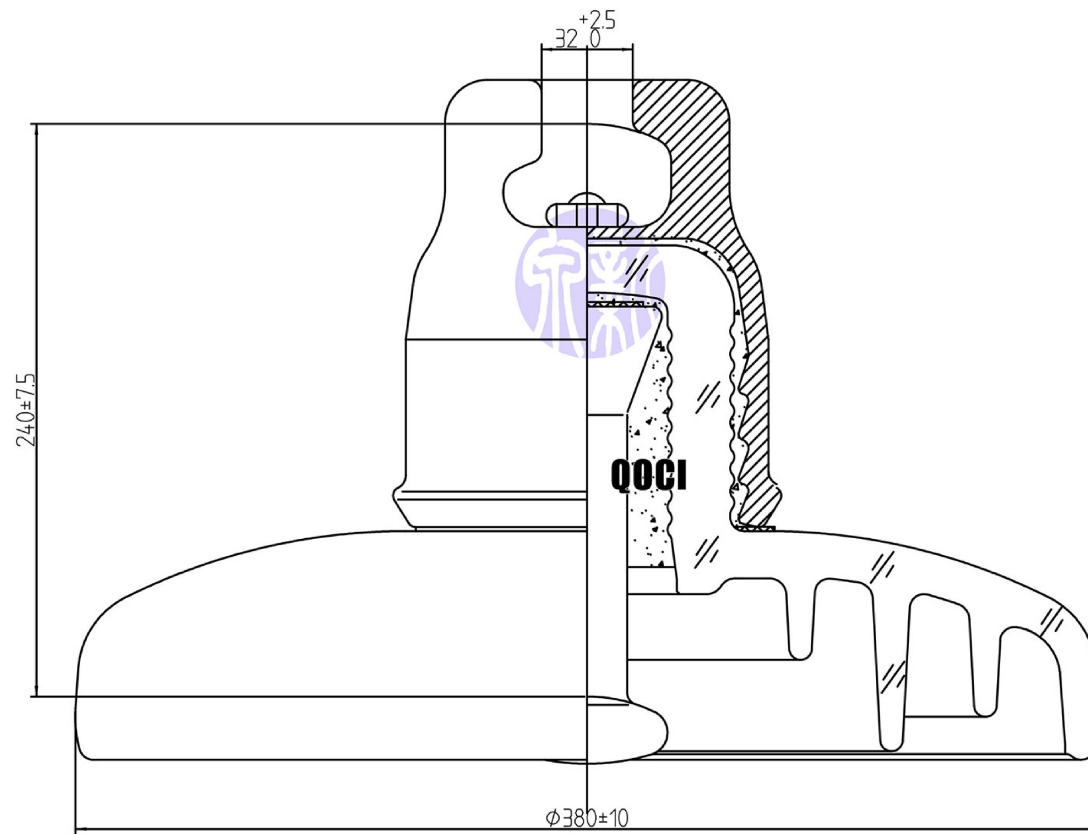