


TECHNICAL DATA

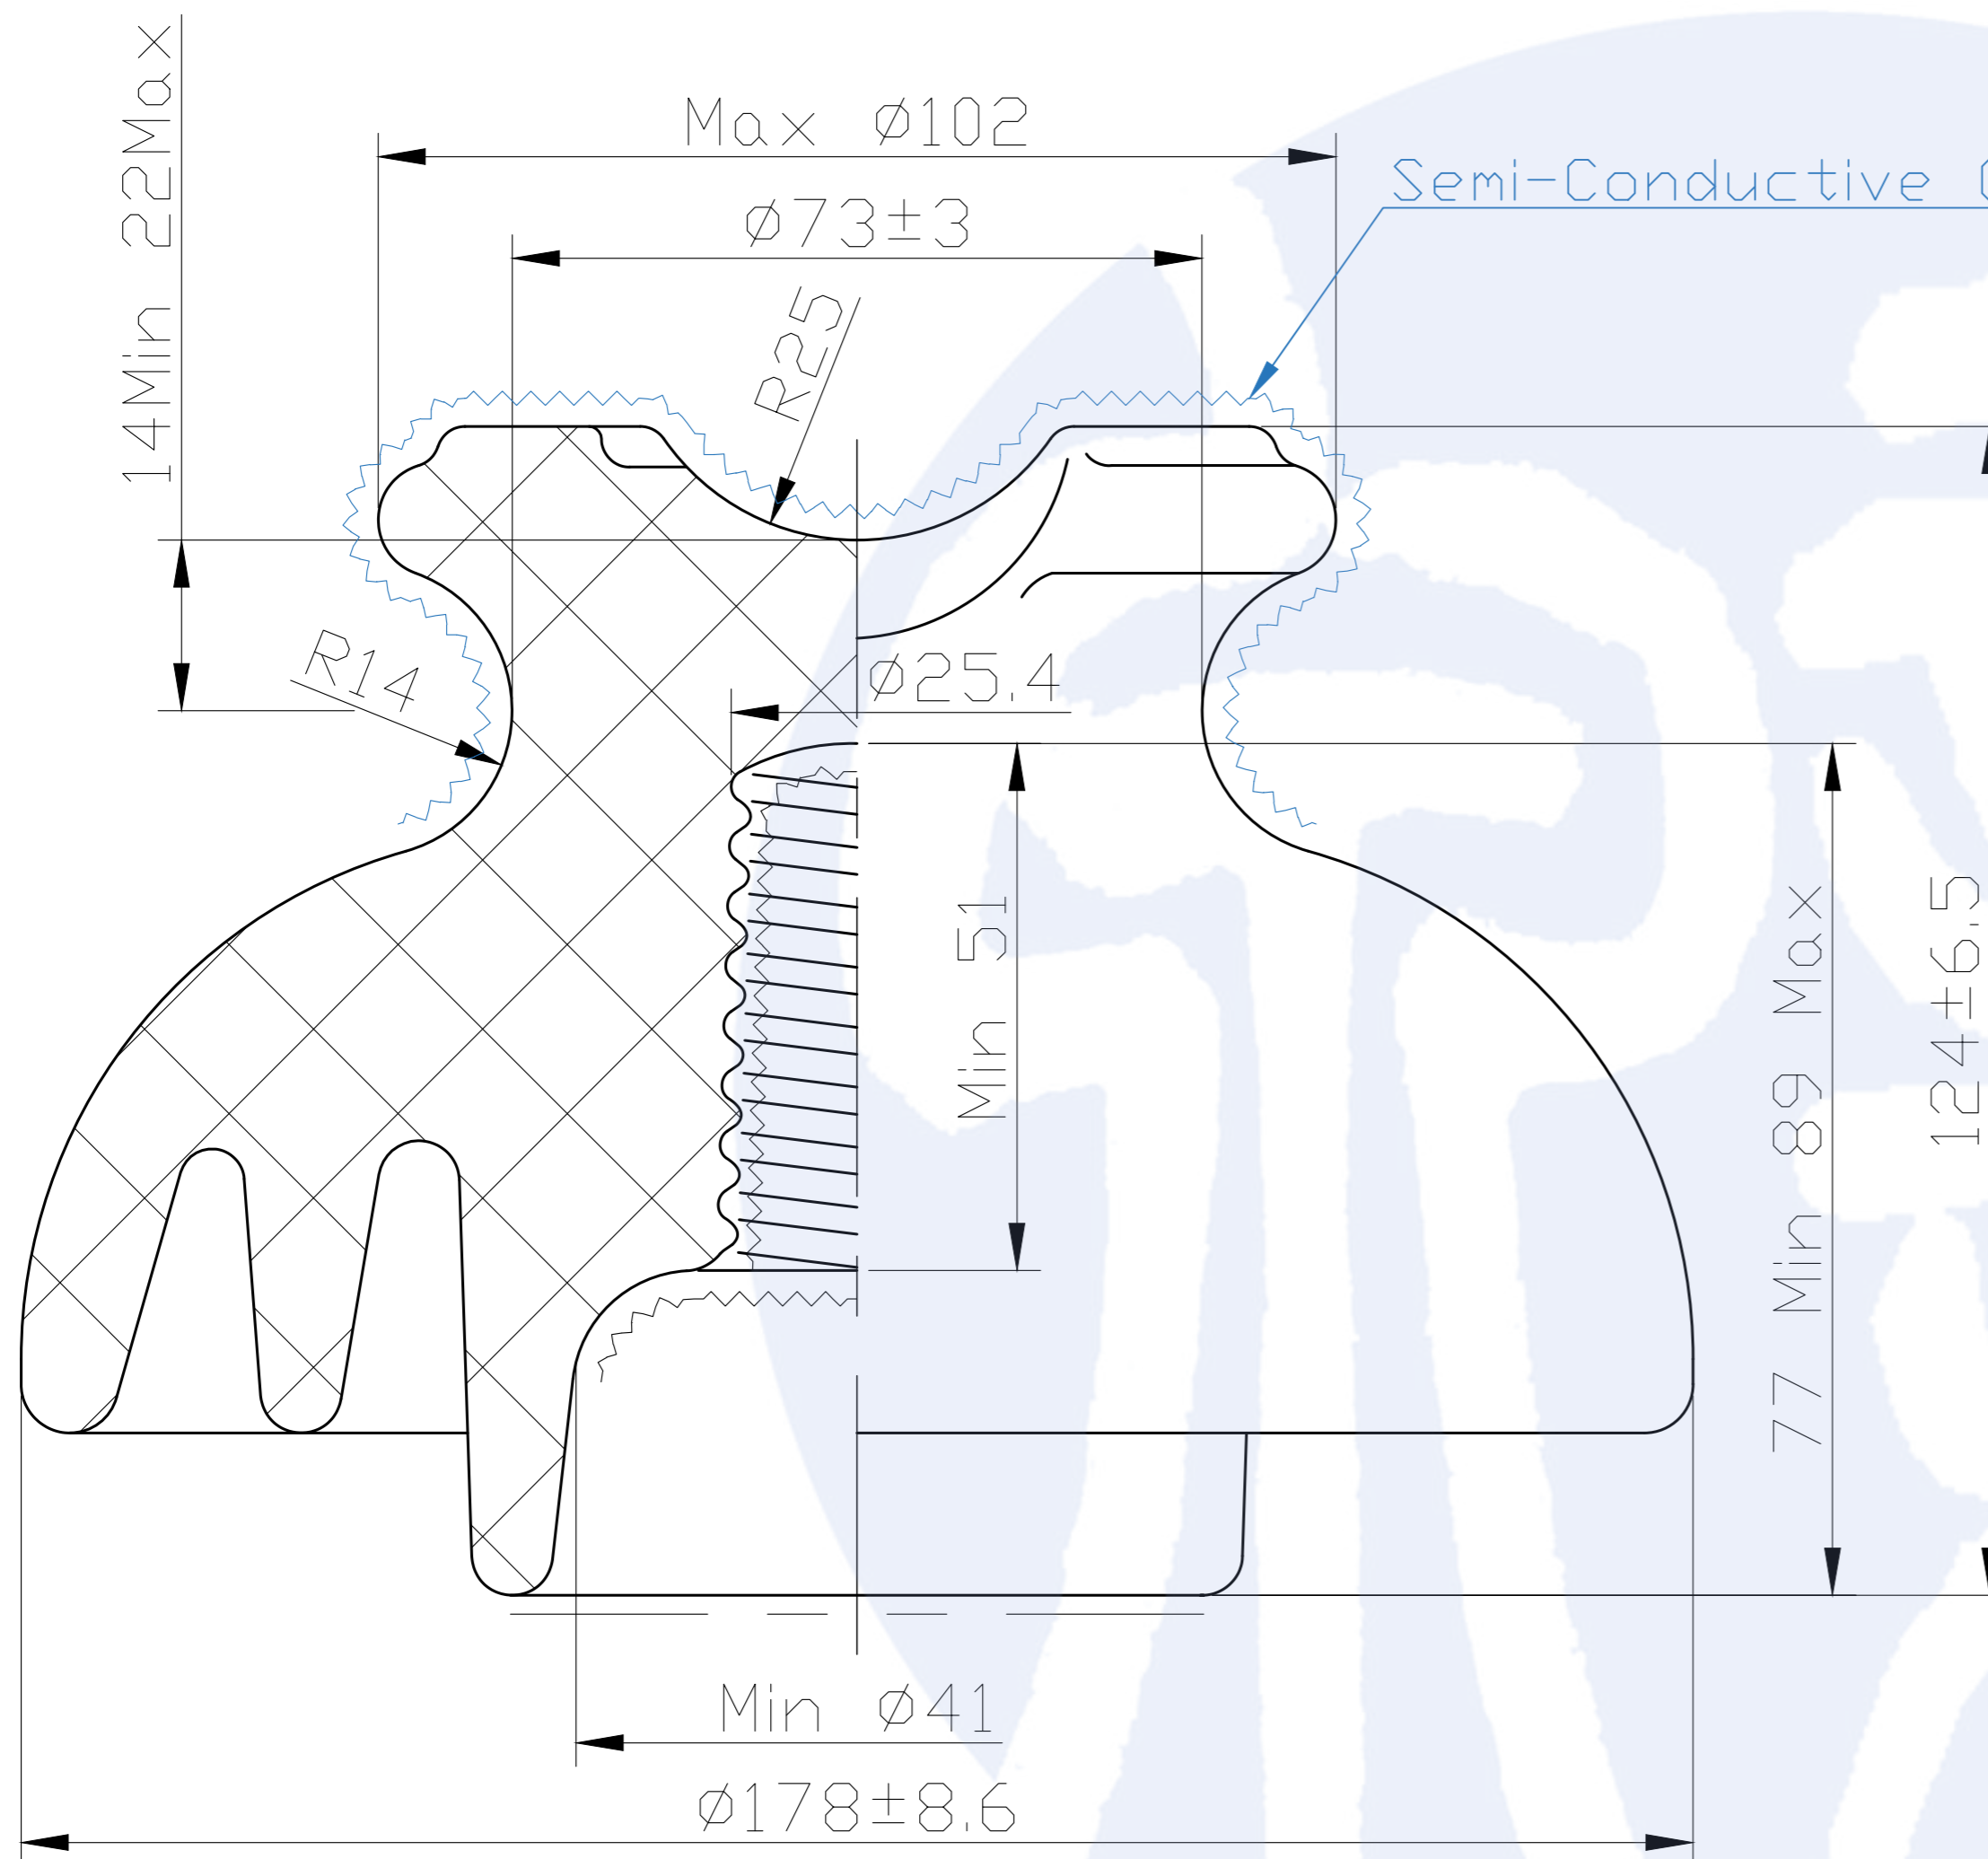

Type	ANSI 55-5
Standard Applied	ANSI C29.5
Main Dimensions D:	178mm
H:	124mm
Leakage Distance	305mm
Dry Arcing Distance	159mm
Cantilever Strength Load	13kN
Low Frequency Dry Flashover Voltage	80kV
Low Frequency Wet Flashover Voltage	45kV
Critical Impulse Flashover (Positive)	130kV
(Negative)	150kV
Low Frequency Puncture Voltage	115kV
Radio-Influence Voltage	
Test Voltage to Ground	15kV
Maximum RIV, at 1000kHz	100 μ V

MATERIAL: PORCELAIN

Visual Dimensional and Inspection According to IEC 383



Jiangxi QOCI Electric CO.,LTD.

www.quanxinelectric.com

Design	Standard	Marker	
Num	Sigh		
Audit	Date	Weight	
Notes	Approved	Scale	1:1



Low&Medium Voltage
Pin Type
Porcelain Insulator

ANSI 55-5