


## TECHNICAL DATA

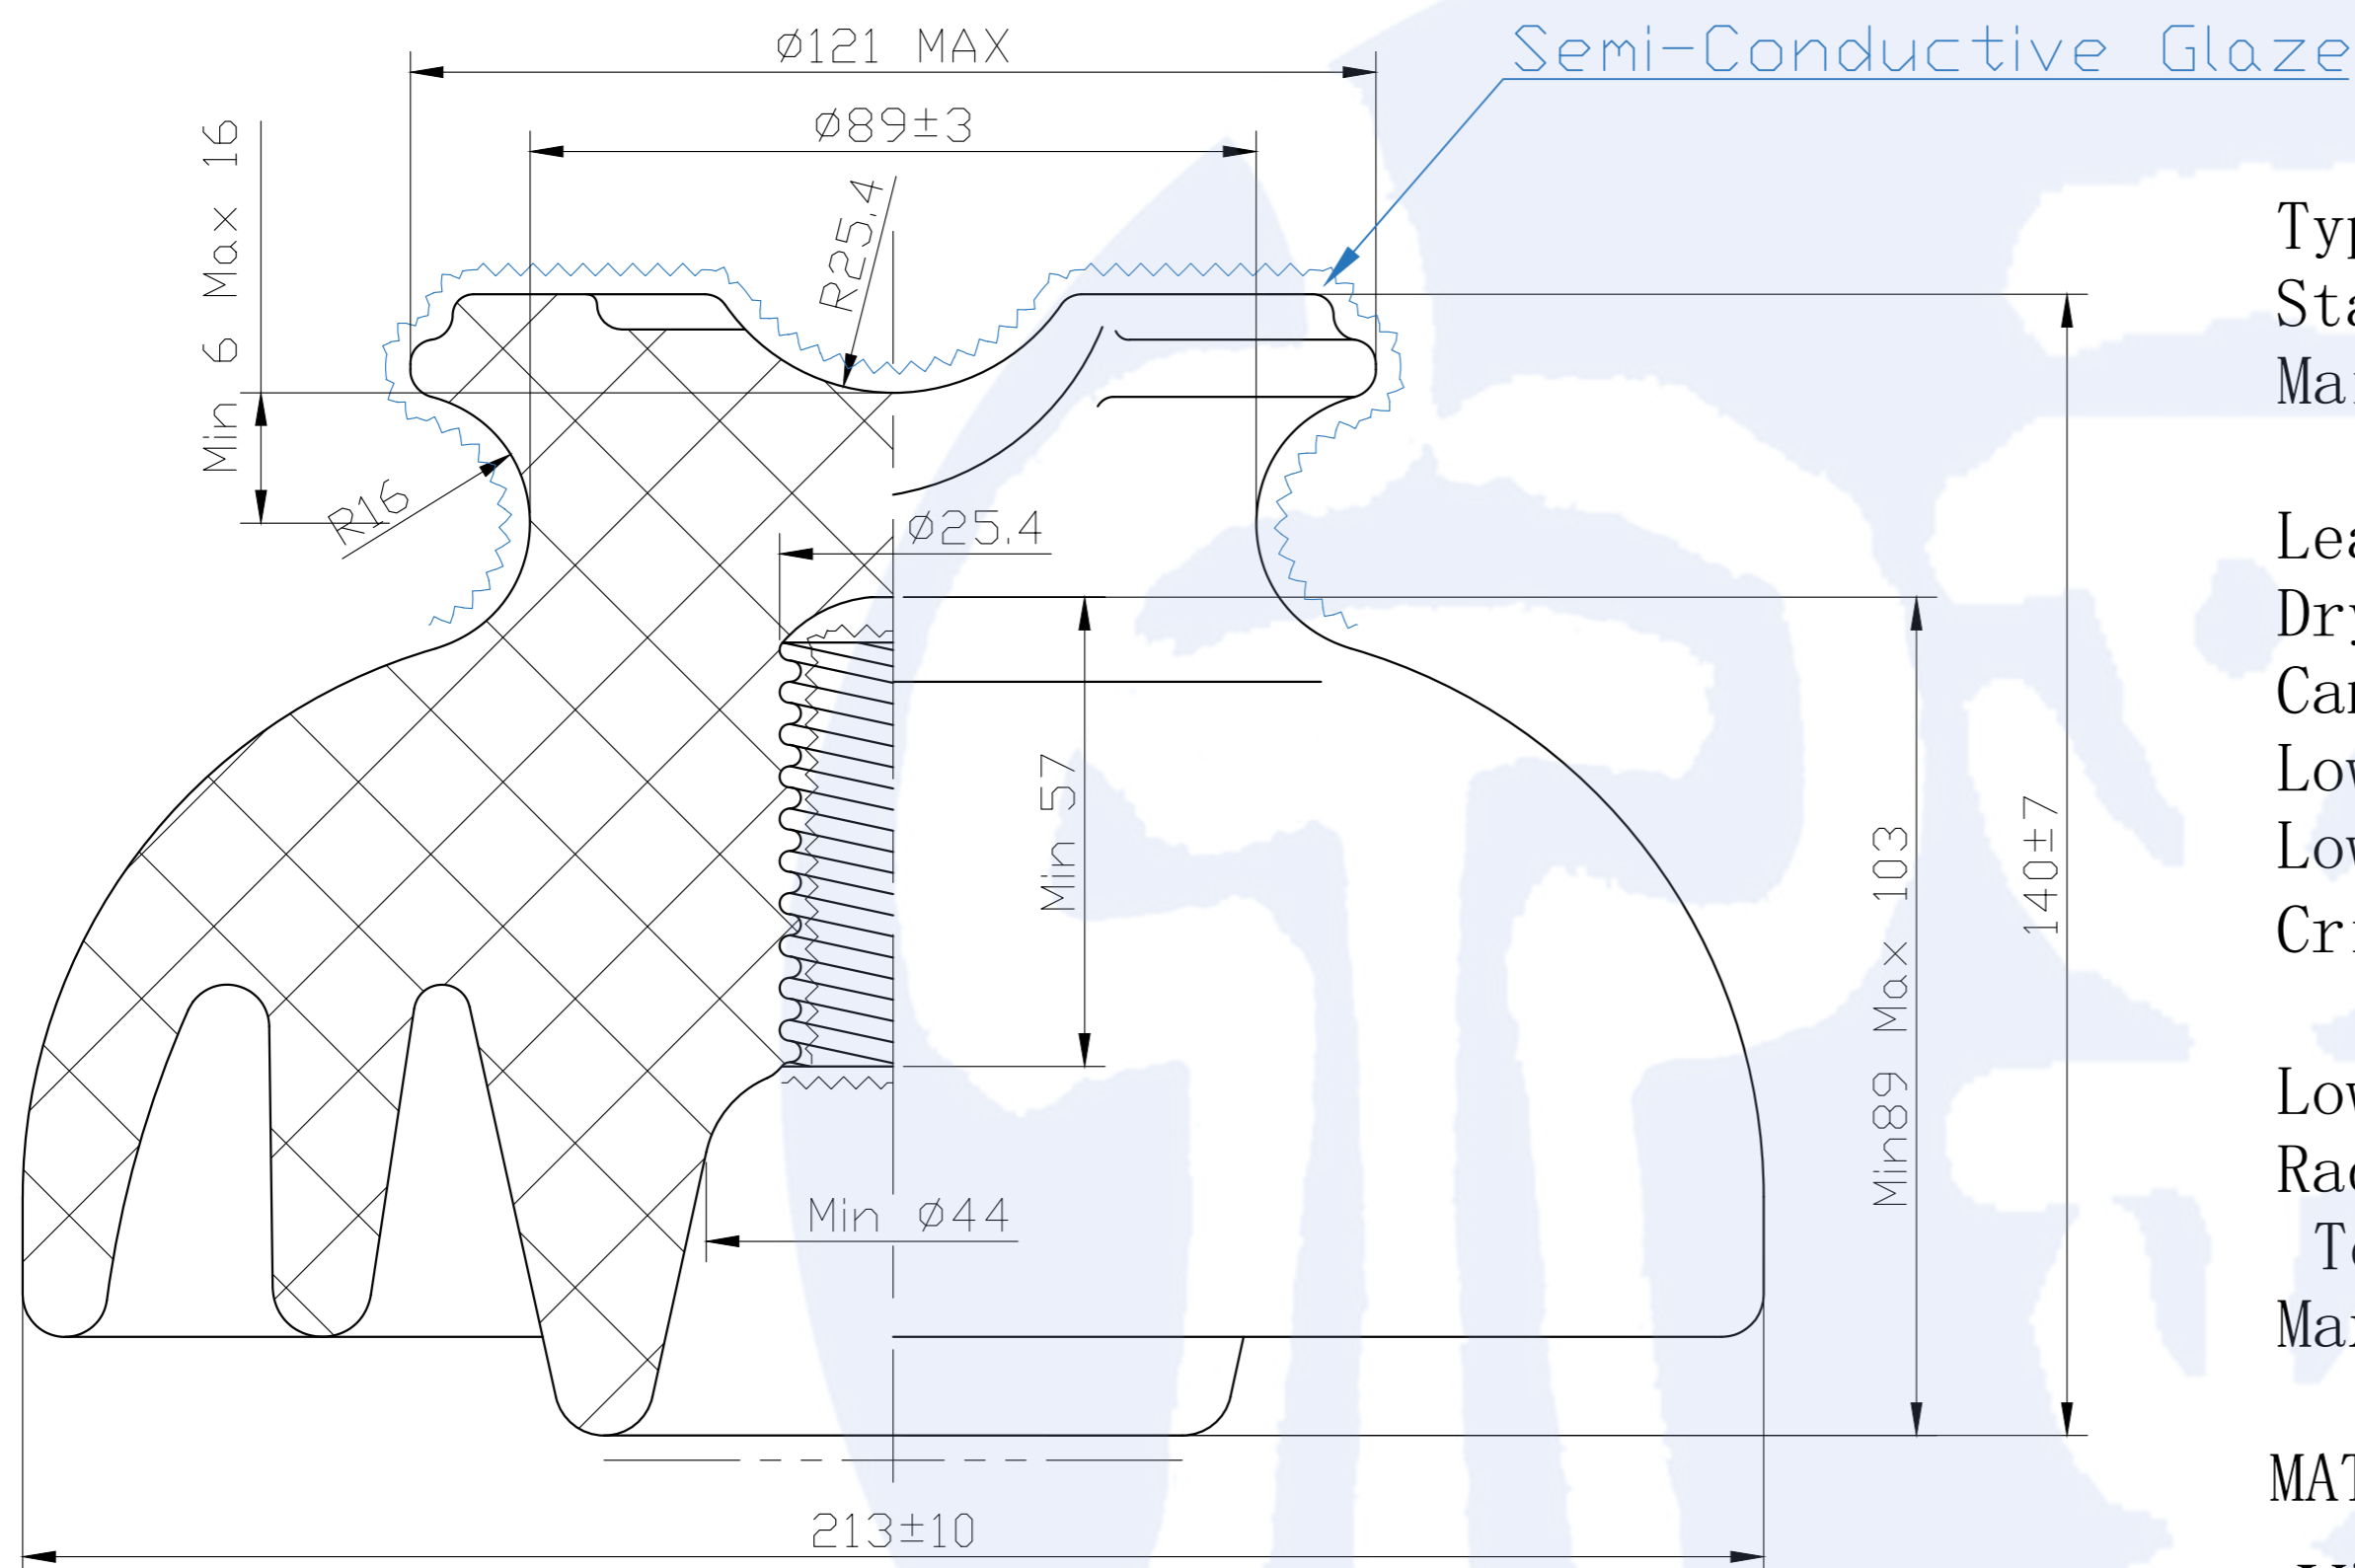

Type	ANSI 55-6
Standard Applied	ANSI C29.5
Main Dimensions D:	213mm
H:	140mm
Leakage Distance	381mm
Dry Arcing Distance	203mm
Cantilever Strength Load	13kN
Low Frequency Dry Flashover Voltage	100kV
Low Frequency Wet Flashover Voltage	50kV
Critical Impulse Flashover (Positive)	150kV
(Negative)	170kV
Low Frequency Puncture Voltage	135kV
Radio-Influence Voltage	
Test Voltage to Ground	22kV
Maximum RIV, at 1000kHz	100 $\mu$ V

MATERIAL: PORCELAIN

Visual Dimensional and Inspection According to IEC 383



**Jiangxi QOCI Electric CO.,LTD.**

[www.quanxinelectric.com](http://www.quanxinelectric.com)

Design	Standard	Marker	
Num	Sigh		
Audit	Date	Weight	
Notes	Approved	Scale	1:1



Low&Medium Voltage  
Pin Type  
Porcelain Insulator

**ANSI 55-6**