
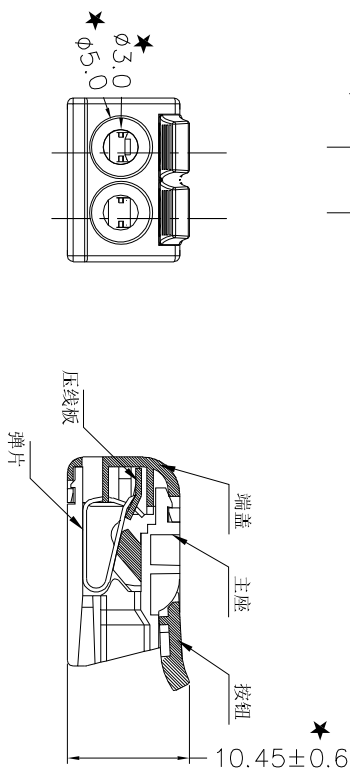


未注公差/General tolerances(mm)														
>0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~
3	6	10	18	30	50	80	120	180	250	315	400	500	~	~
±0.15	±0.20	±0.25	±0.30	±0.35	±0.40	±0.60	±0.80	±0.95	±1.00	±1.20	±1.60	±2.20	±2.50	±2t

符号/SIGN	描述/DESCRIPTION	修订者/DRAWN	日期/DATE

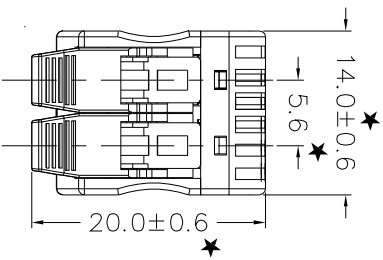

技术参数 Technical parameter:

● 产品标准/Rated Voltage	UL486C	GB13140	IEC60998
● 获得安规及标志 Access to Safety Mark			
● 证书号码/Certificate No	E348667	COC200 03236127	R5050 37370001
● 额定电压/Rated Voltage	500V	450V	450V
● 额定电流/Rated Current		32A	32A
● 线径范围/Wire range		0.2~4mm ²	0.2~4mm ²
● 硬质导线/Solid wire(AWG)		24~12AWG	
● 软质导线/Stranded wire(AWG)		24~12AWG	
● 剥线长度/Wire strip length	14mm	11mm	14mm
● 绝缘耐压/Withstanding Voltage	1600V	2500V	2500V
● 温度范围/Operating temperature		-40℃~105℃	
● 焊接温度/Soldering temperature		/	
● 关键尺寸/Critical dimension			★

⑤	压线/Crimping Plate	紫铜		1
④	弹片/Leaf Spring	SUS301		1
③	按钮/Button	PA66		2
②	端盖/Cover	PC		1
①	主座/Housing	PC		1
ITEM 序号	NAME OF PART 零件名称	Material 材料	NOTES 备注	QTY 用量
1	2	3	4	5

	CAT NO./认证型号	CM-221	SHEET: 1/1
	PATE NO./成品料号	02.04.008.0001	SCALE: 1:1
	CUST NO./客户料号	/	REV.: A01
	APPROVED/审批	何跃雄 2021.12.15	MODEL: CM-221-2P 主体透明, 按钮蓝色
	CHECKED/核准	胡德权 2021.12.15	DRAWING NO./图号: CM-221-001
	DRAWN/制图	陈燕龙 2021.12.15	TYPE/图纸类型: CUSTOMER_DRAWING
	SIZE: A4	mm inch	7
	6	8	