
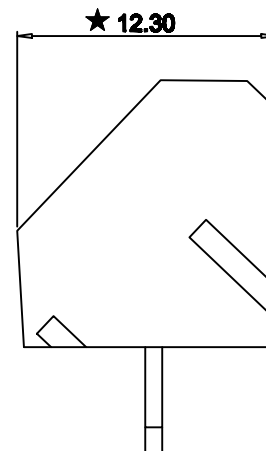
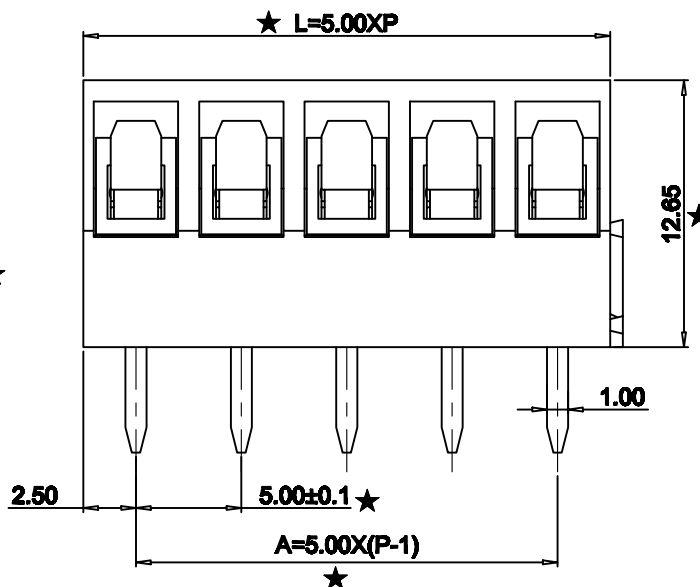
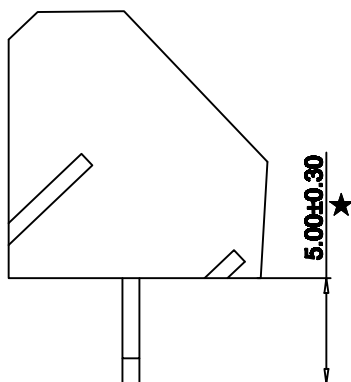


	2		1	
REV	CONTENT		CHK	DATE
4	Pin header	Copper alloy	Sn plated	
3	Screw	Steel	M2.5/Zn Plated	
2	Cage	Copper alloy	M2.5/Ni plated	
1	Housing	PA66	UL94V-0	
ITEM	NAME OF PART	MATERIAL	NOTES	
UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		300/15	/	300/10
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)		/	250/24	/
工频耐压/Withstanding Voltage(V/Min)		/	AC2000	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M2.5, 0.4/3.54		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)		0.5~2.5/22~12		
间距/Pitch(mm)/线数范围/Poles		5.0/N=02~24P		
剥线长度/Stripping length(mm)		4~5		
使用温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		

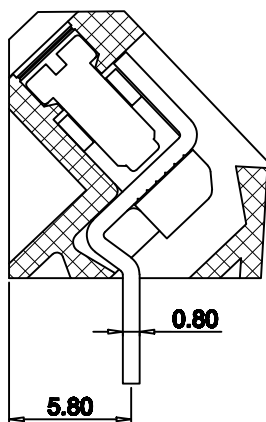

Total Pitch Tolerances in mm								Nominal dimension range in mm								$\perp$		$\equiv$	$-$ //			
over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 250	over 250 to 350	over 0 to 30	over 30 to 53	over 53 to 70	over 70 to 90	over 90 to 115	over 115 to 150	over 150 to 200	over 200 to 250	over 250 to 320	over 0 to 10	over 10	all	over 0 to 100	over 100 to 150	over 150
± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.60	± 0.70	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.5

ITEM	NAME OF PART		NO. OF PART		Q'TY	MATERIAL			NOTE				
DWG.	SK	DATE			SIZE	A4	UNITS	mm	SHEET/OF	1 / 1			
CHK.		DATE			SCALE								
APP.		DATE			NAME	CM-330-5.0							
 Xiamen Fucon					DWGNO.								