

FILE: ZB02/

REV

CONTENT

CHK

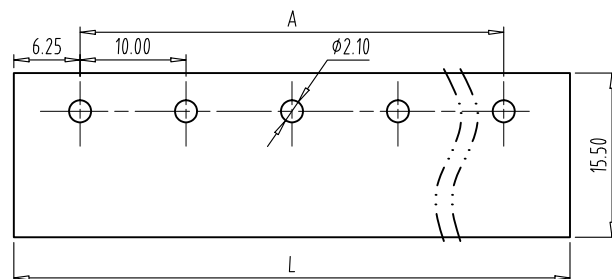
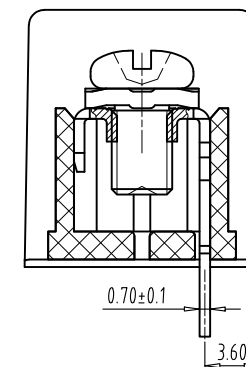
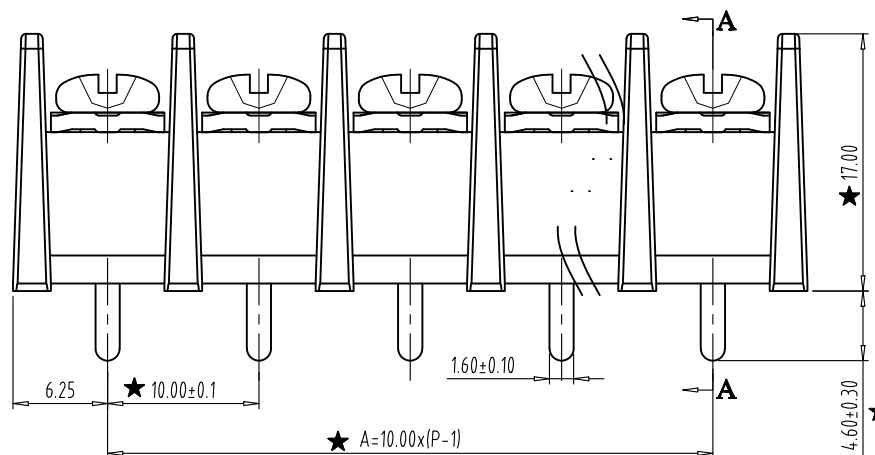
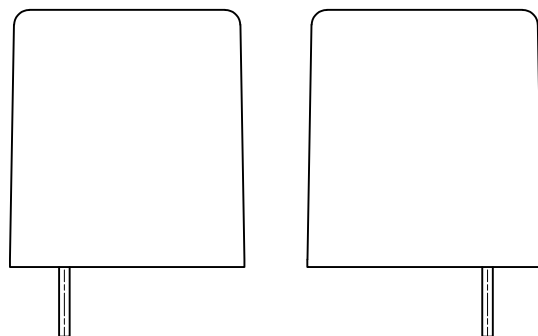
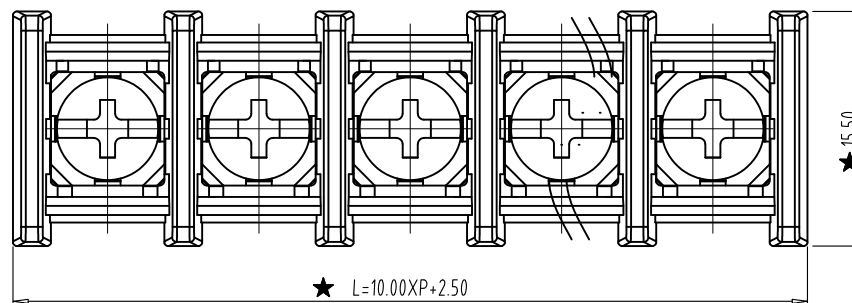
DATE

V0.0

CONTENT

SK

2014-12-19

**PCB LAYOUT****NOTES:**

1. Rating: 300V 20A
2. Insulation Withstands Voltage: AC2000V/MIN
3. Insulation Resistance:
500MΩ or more at DC500V
4. Using Temperature Range: -40°C/+105°C
5. Screw Torque Value: 1.2N.m
6. Suitable Electric Wire: 12-22AWG
- 7, "★" the important dimension.

ITEM	NAME OF PART		NO. OF PART		Q"TY	MATERIAL			NOTE	
DWG.	SK	DATE	2014-12-19		SIZE	A4	UNITS	mm	SHEET/OF	1 / 1
CHK.		DATE			SCALE	2:1		10.0		
APP.		DATE			NAME	CM-55S-B				
Xiamen Fucon Electronics Co.,LTD										
					DWGN0.					

Total Pitch Tolerances
in mmNominal dimension range
in mm

A	Total Pitch Tolerances								Nominal dimension range								$\perp$		$\div$	$-$ //				
	in mm								in mm															
	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 0	over 10		over 0	over 100	over 150
	to 30	to 53	to 70	to 90	to 115	to 150	to 250	to 350	to 500	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10		all	to 100	to 150	to 150
	± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.60	± 0.70	± 0.85	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.5