

未注公差/General tolerances(mm)

0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	0.1/10 ±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

A

A

B





B

C


C

D

D

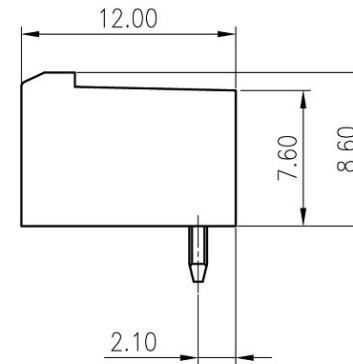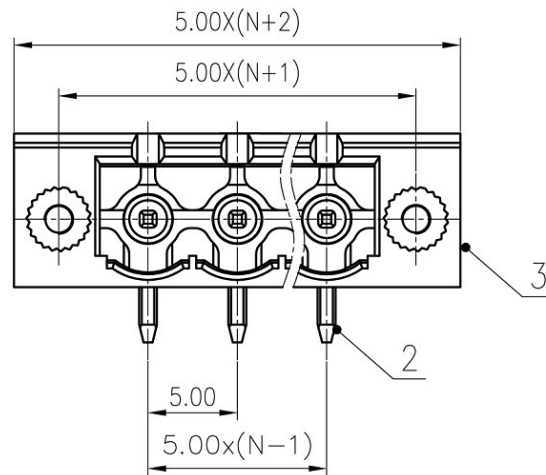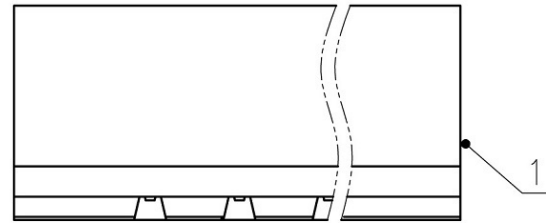

PCB LAYOUT

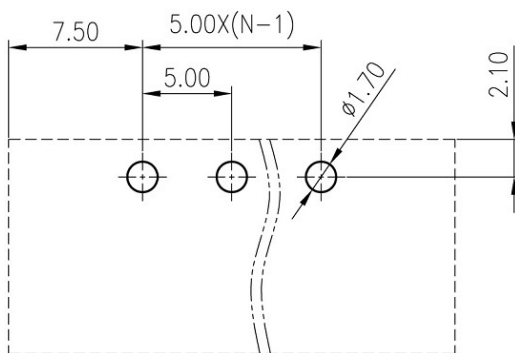

3	Nut	Copper alloy	M2.5
2	Pin header	Copper	Sn Plated
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
额定电压/电流/Rated Voltage(V)/Current(A)		300/15	/
IEC 标准/IEC Standard:		D	
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2
额定电压/电流/Rated Voltage(V)/Current(A)		/	320/20
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		/	4
间距/Pitch(mm)/线数范围/Poles		5.08/N=02~22P	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

MATERIAL: FUCON

MAT NO.: /

STATUS: /

APPD: He Yue 2020.03.03

CHKD: Li long 2020.03.03

DRFT: Huang Ge 2020.03.03

SURFACE: /

Xiamen Fucon Electronics Co.,LTD

NAME:

CM-2EDG-ZMR-5.0

DRAWING NO.:

REV

TO

SIZE: A4

mm
(inch)

TYPE: CUSTOMER DRAWING

SCALE: 2.5:1

SHEET

1/1

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------