


1		2		3			
未注公差/General tolerances(mm)							
>0	>3	>6	>10	>18	>30	>50	>80
~	~	~	~	~	~	~	~
3	6	10	18	30	50	80	120
~	~	~	~	~	~	~	~
>120	>180	>250	>315	>400	>500	0.1/10	
~	~	~	~	~	~	±2℃	
±0.15	±0.20	±0.25	±0.30	±0.35	±0.40	±0.60	±0.80
~	~	~	~	~	~	~	~
±0.95	±1.00	±1.20	±1.60	±2.20	±2.50		

5	6	7	8
符号/SIGN	描述/DESCRIPTION	修订者/DRAWN	日期/DATE

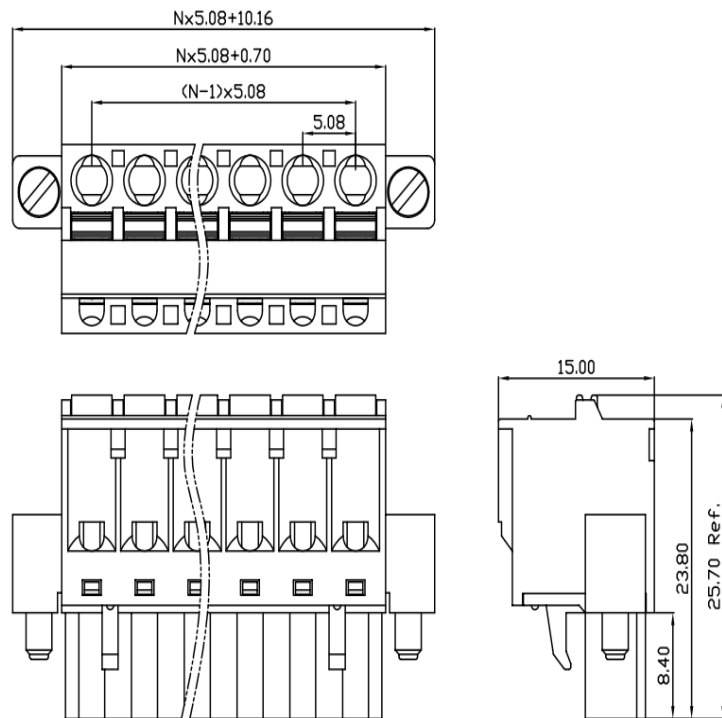

ITEM	NAME OF PART	MATERIAL	NOTES
5	Spring	Stainless steel	/
4	Clamp	Copper alloy	Sn Plated
3	Button	PA66	UL94V-0
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
UL 标准/UL Standard:		B	C D
额定电压/电流/Rated Voltage(V)/Current(A)		300/10	/ 300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	III/2 II/2
额定电压/电流/Rated Voltage(V)/Current(A)		/	320/20 /
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		/	4 /
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)		0.2~2.5/26~12	
间距/Pitch(mm)/线数范围/Poles		5.08/N=02~24P	
剥线长度/Stripping length(mm)		9-10	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

⑥	法兰螺钉	C1018	/	2
⑤	端盖	PA66	/	1
④	导电件	C5191	/	N
③	方块	H59	/	N
②	螺钉	C1018	/	N
①	主座	PA66	/	1
EM 序号	NAME OF PART 部件名称	Material 材料	NOTES 备注	QTY 用量

	CAT NO./认证型号	/	SHEET: 1/1
	PATE NO./成品料号	XX.XX.XXX.	SCALE: 1:1
	CUST NO./客户料号		REV.: A01
APPROVED/审批	王轩 2022.12.15	MODEL:	F2.5T25-5.08
CHECKED/核准	凌家民 2022.12.15		
DRAWN/制图	王轩 2022.12.15	DRAWING NO./图号:/	
	SIZE: A4	TYPE/图纸类型: CUSTOMER_DRAWING	