


未注公差/General tolerances(mm)														
>0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10 ±2°
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500		
±0.15	±0.20	±0.25	±0.30	±0.35	±0.40	±0.60	±0.80	±0.95	±1.00	±1.20	±1.60	±2.20	±2.50	

5	6	7	8
符号/SIGN	描述/DESCRIPTION	修订者/DRAWN	日期/DATE

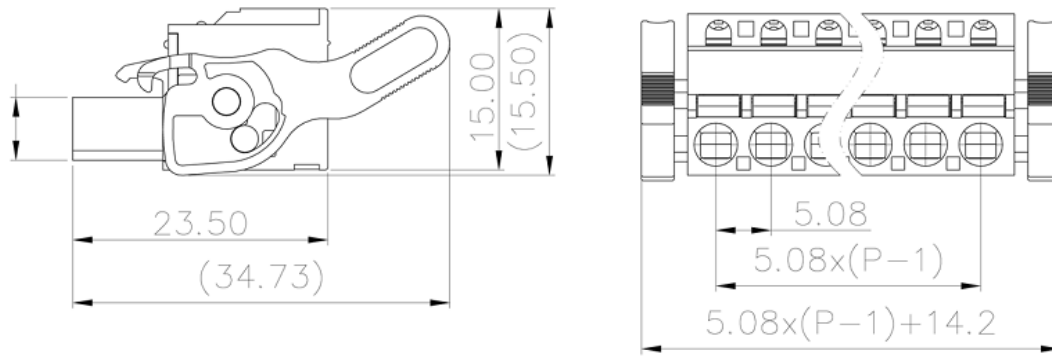

技术参数 Technical parameter:

● 产品标准/Rated Voltage	UL1059(B)	IEC60947	GB14048
● 获得安规及标志 Access to Safety Mark			
● 证书号码/Certificate No	XXXXXXXX	XXXXXXXXXX	XXXXXX XXXXXX
● 额定电压/Rated Voltage		320V	
● 额定电流/Rated Current		20A	
● 线径范围/Wire range		0.2-2.5mm ²	
● 硬质导线/Solid wire(AWG)		26-12AWG	I
● 软质导线/Stranded wire(AWG)			
● 剥线长度/Wire strip length	6-7mm	6-7mm	6-7mm
● 绝缘耐压/Withstanding Voltage	1600V	2500V	2500V
● 螺钉规格/Screw	M3		
● 额定扭力/Rated Toque			
● 温度范围/Operating temperature	-40℃~ 115℃		
● 焊接温度/Soldering temperature	260±5℃/5Sec		
● 关键尺寸/Critical dimension	★		

⑤	端盖COVER	PA66	/	1
④	导电件Clamp	C5191	/	XX
③	铜方块Cage	H59	/	XX
②	螺钉Screws	钢材	/	XX
①	主座HOUSING	PA66	/	1

	CAT NO./认证型号		SHEET: 1/1
	PATE NO./成品料号	XX.XX.XXX.XXXX	SCALE: 1:1
	CUST NO./客户料号	/	REV: A01
APPROVED/审批	王轩	2023.3.1	MODEL: F2.5T26-5.08
CHECKED/核准	凌家民	2023.3.1	
DRAWN/制图	魏兴烨	2023.3.1	DRAWING NO./图号:
SIZE: A4		TYPE/图纸类型: CUSTOMER_DRAWING	