

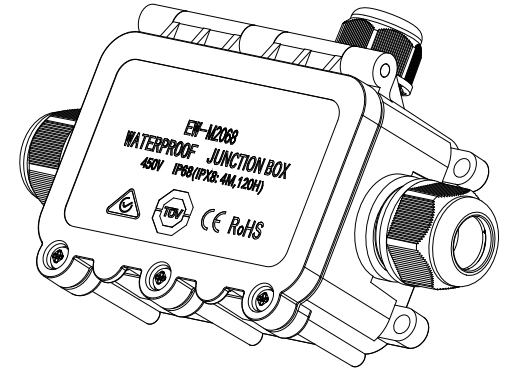


Customer picture

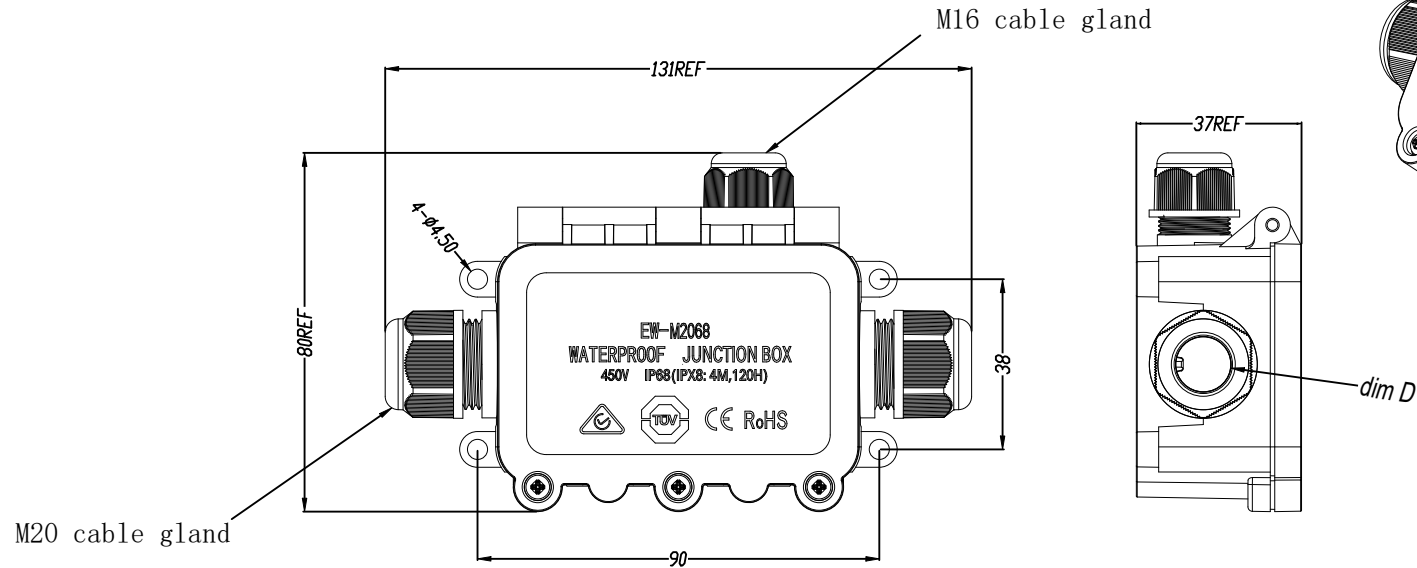

Technical reference:

- 1、Raw Material: PA66
- 2、Level of protection: IP68
- 3、Current rating: 40A
- 4、Voltage rating: AC 450V
- 5、Withstanding voltage: AC 2500V
- 6、Flame-resistant rating: UL94 V-0
- 7、Cable gague: 0.5mm<sup>2</sup>~6mm<sup>2</sup>
- 8、Operating temperature: -40~+105°C
- 9、Certification: RoHS/TUV/SAA/CE
- 10、Number of product cores:

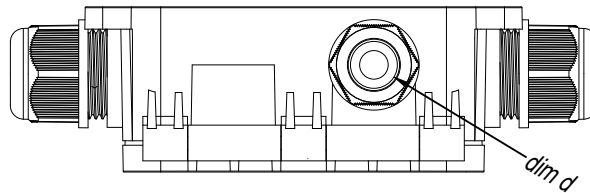

Ø6.5 mm	Ø3.5~7 mm	Ø8.5 mm	Ø5~9 mm
Ø9.8 mm	Ø7~10 mm	Ø11.5 mm	Ø9~12 mm
Rubbers Diameter d	Outer Cable Diameter	Rubbers Diameter D	Outer Cable Diameter

					TOLERANCE UNSPECIFIED	UNIT	SCALE	SHEET	REV	P/N	EW-M2068-3T	DESIGN		
					X. ±0.35	mm	1:1	1/1	A1	TITLE	Waterproof connector	CHKD		
		NEW VERSION RELEASE	HGH	6.21	X.X ±0.20							REVIEW		
MARK	ECN	CHANG DESCRIPTION	SIGNATURE	DATE							FUCON Xinmen Fucon Electronics Co.,LTD	APPD		