
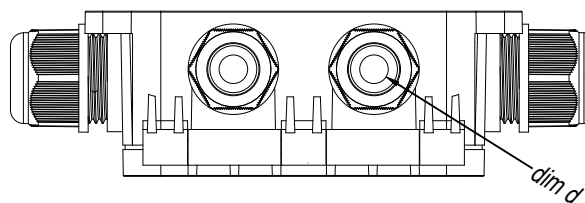
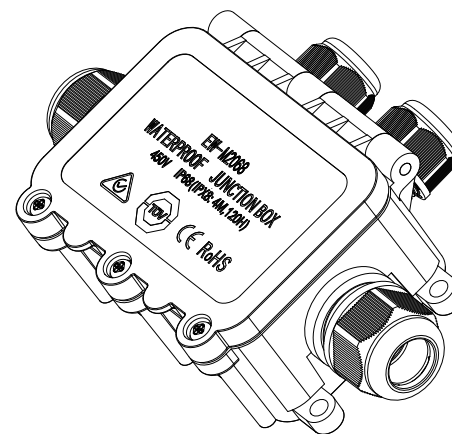


Customer picture

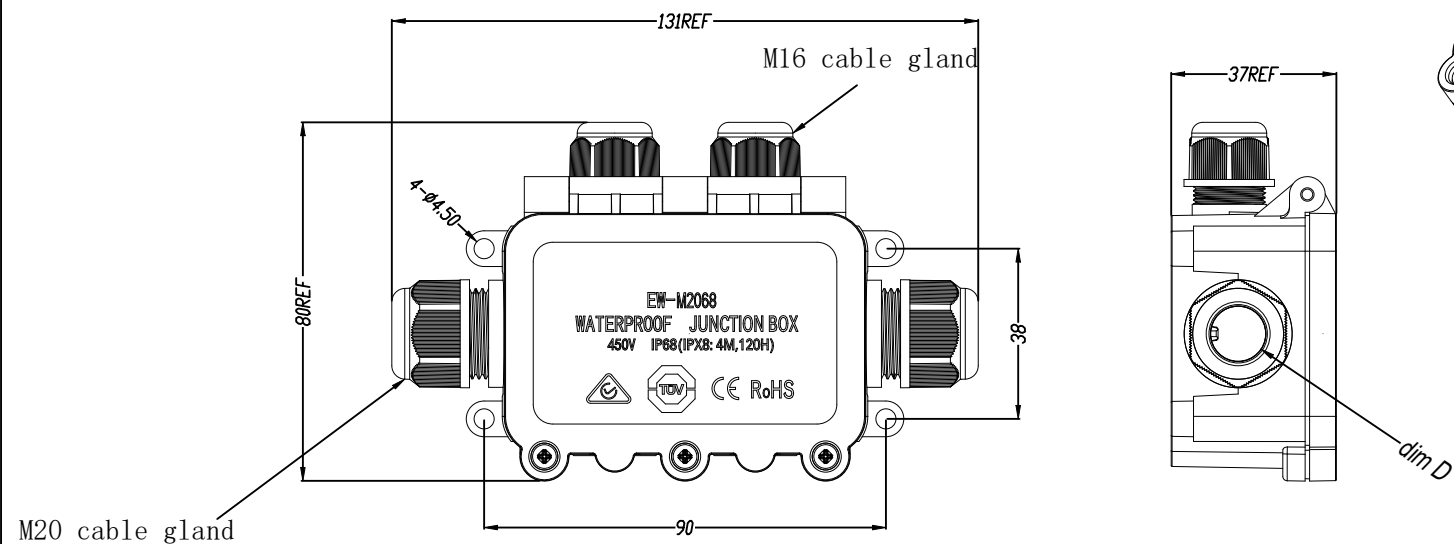

Technical reference:

- 1、Raw Material: PA66
- 2、Level of protection: IP68
- 3、Current rating: 40A
- 4、Voltage rating: AC 450V
- 5、Withstanding voltage: AC 2500V
- 6、Flame-resistant rating: UL94 V-0
- 7、Cable gague: 0.5mm²~6mm²
- 8、Operating temperature: -40~+105℃
- 9、Certification: RoHS/TUV/SAA/CE
- 10、Number of product cores:

Ø6.5 mm	Ø3.5~7 mm	Ø8.5 mm	Ø5~9 mm
Ø9.8 mm	Ø7~10 mm	Ø11.5 mm	Ø9~12 mm
Rubbers Diameter d	Outer Cable Diameter	Rubbers Diameter D	Outer Cable Diameter

					TOLERANCE UNSPECIFIED	UNIT	SCALE	SHEET	REV	P/N	EW-M2068-4TA	DESIGN		
					X. ± 0.35 X. X ± 0.20	X. ° $\pm 3^\circ$ X. X° $\pm 2^\circ$	mm	1:1	1/1	A1	TITLE	Waterproof connector	CHKD	
		NEW VERSION SELESE	HGH	6. 21			  FUCON Xinmen Fucon Electronics Co.,LTD					REVIEW		
MARK	ECN	CHANG DESCRIPTION	SIGNATURE	DATE								APPD		