

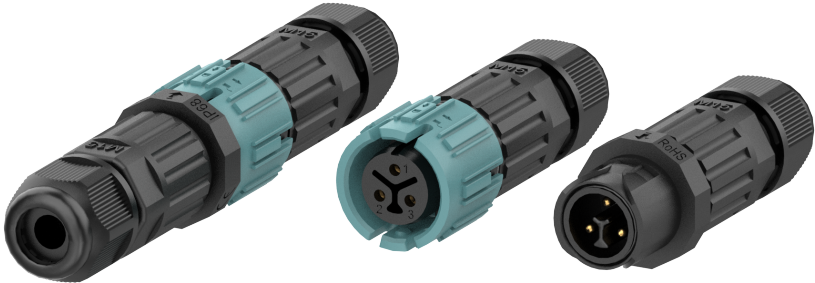
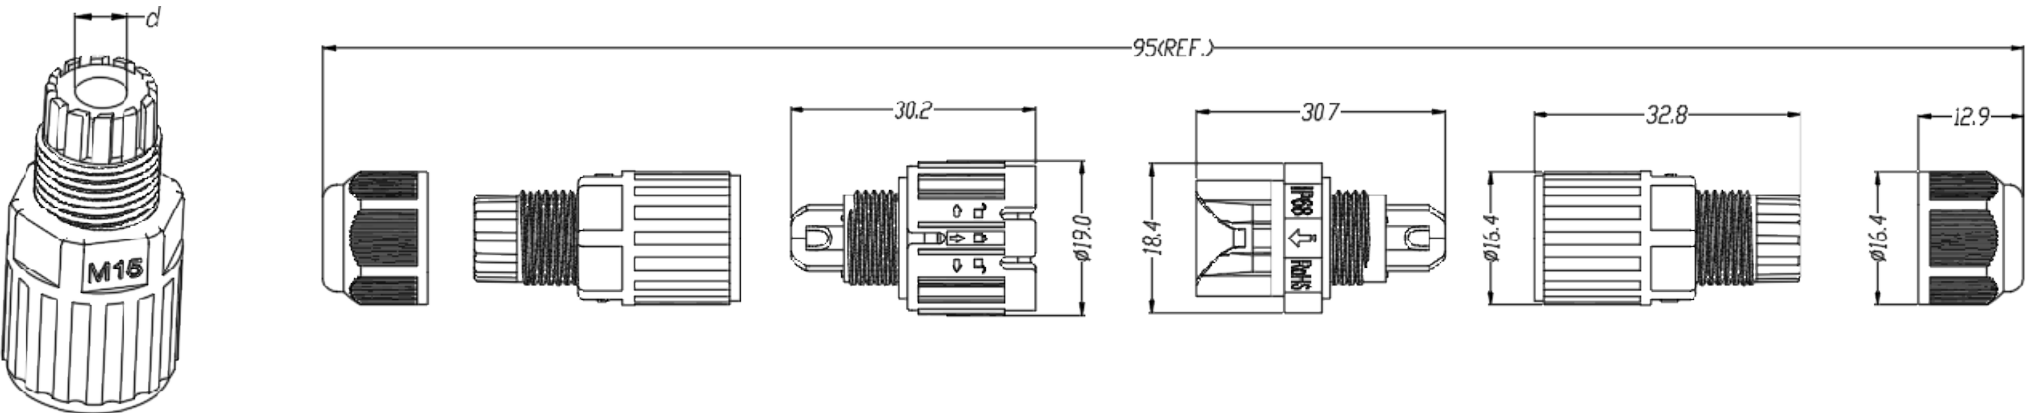


1	2		3	4	5	6	7	8	
Raw Material		PA66、SILICONE、COPPER ALLOY		3 PIN		REV	DESCRIPTION	DESIGN	DATE
Certification		CQC/RoHS/CE		 		A0	NEW DRAWING	EDDIE	2022/4/4
Flame-resistant rating		UL94 V-0		Female connector Male connector					
Level of protection		IP68							
Voltage rating/Current rating		450 V / 10 A							
Withstanding voltage		2500 V							
Cable gague		0.5~1.5mm ²							
Operating temperature		-40~105 °C							
Part Number		Rubbers Diameter(d)	Outer Cable Diameter						
EW-M15MF-03201BB6		φ 6.5 mm	φ 3.5~7 mm						
EW-M15MF-03201BB4		φ 4.5 mm	φ 2.5~4.5 mm						
Rubbers Diameter									
21.8 g	42x30x34 cm	600 PCS	14.08Kg	TOLERANCE UNSPECIFIED	UNIT	mm	DRAW	P/N	EW-M15MF-03201BB##
Weight	MEAS	Each carton number	G. W.	X. ±0.35	X.XX ±0.10	X.XX ±0.05	X.XXX ±0.03	SCALE	1:1
				X. X ±0.20	X.XXX ±0.05	X.XXX ±0.03	X.XXX ±0.01	CHKD	D/N
					SHEET	1/1	APPD	TITLE	EW-M15MF-3P WATERPROOF CONNECTOR
1	2	3	4	5	6	7	8	