

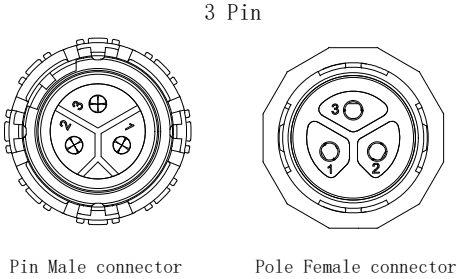
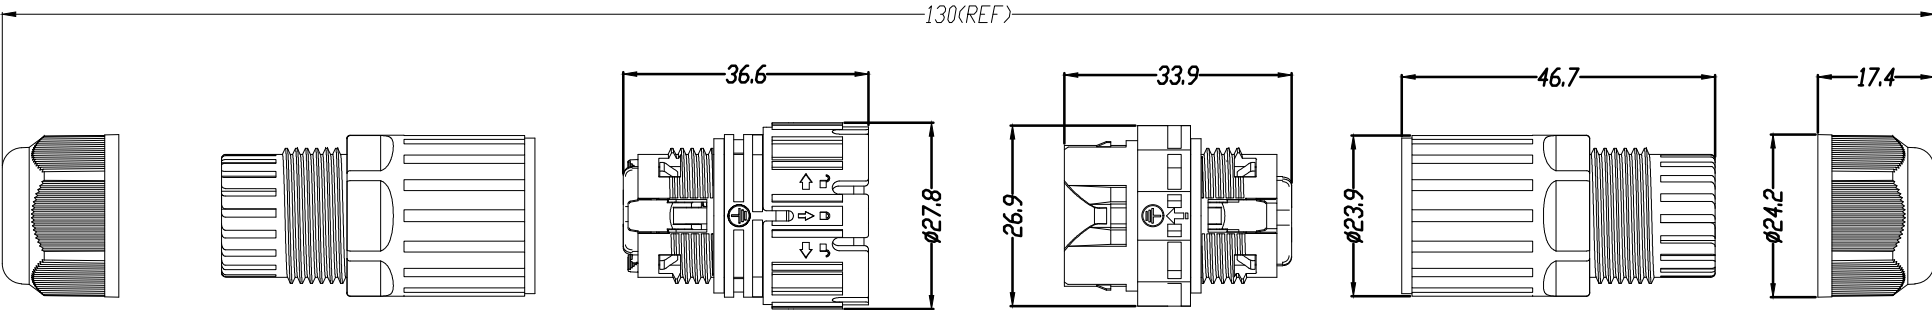


REV	DESCRIPTION	DESIGN	DATE
AO	NEW DRAWING	EDDIE	2021.03.31

Raw Material	PA66、COPPER ALLOY、SILICONE
CERTIFICATION	CQC/UL/TUV/RoHS/CE
Flame-resistant rating	UL94 V-0
Level of protection	IP68
Voltage rating/Current rating	450V / 16A
Withstanding voltage	2500V
Cable gague	0.5mm <sup>2</sup> ~2.5mm <sup>2</sup>
Operating temperature	-40℃ ~+105℃

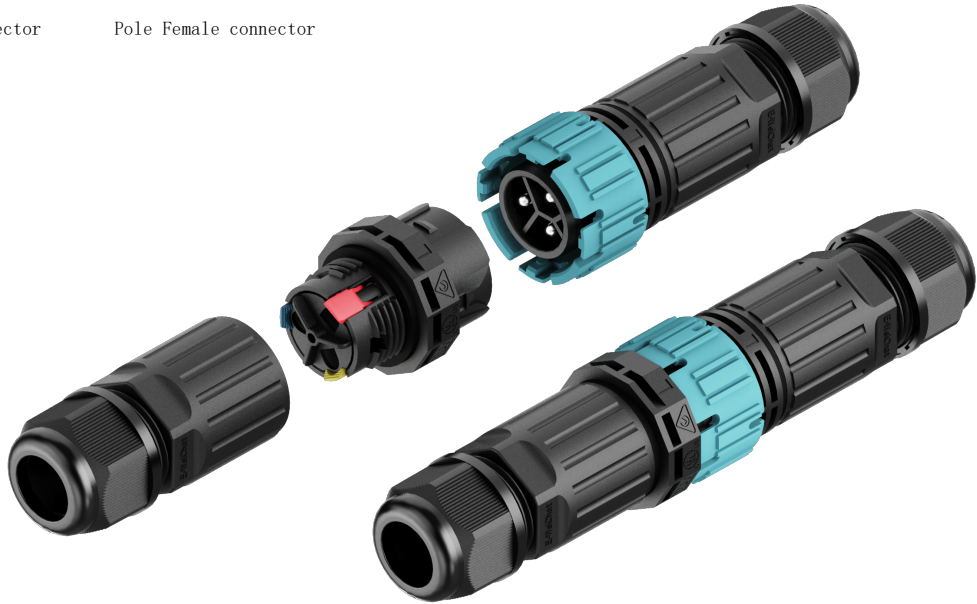

Part Number	Rubbers Diameter	Outer Cable Diameter
EW-P23MF-03301BB11	∅11.5mm	∅9-12mm
EW-P23MF-03301BB8	∅8.5mm	∅5-9mm



Weight	MEAS	Each carton number	G. W.
54.35g	42x30x34cm	250 pcs	14.6kg

TOLERANCE UNSPECIFIED			
X. ±0.35	X.XX ±0.10	X.° ±3°	
X.X ±0.20	X.XXX ±0.05	X.X° ±2°	
		X.XX° ±1°	

UNIT	mm	DRAW	EDDIE / 2022.03.31	PART NO	EW-P23MF-03301BB##
SCALE	1:1	CHKD		DWG NO	EW-P23MF-03301BB##
SHEET	1/1	APPD		TITLE	EW-P23MF_WATERPROOF_CONNECTOR

