Raw Material	PA66、SILICONE、COPPER ALLOY
Certification	CQC/RoHS/CE
Flame-resistant rating	UL94 V-0
Level of protection	IP68
Voltage rating/Current rating	450 V / 20 A
Withstanding voltage	2500 V
Cable gague	0.5～2.5mm²
Operating temperature	-40～105 ℃

6 PIN

Pole Female connector

Pin Male connector

REV	DESCRIPTION	DESIGN	DATE
A0	NEW DRAWING	Andy.Pi	2022/4/9

The color of the product is subject to the actual product, the picture is for reference only

Part Number	Rubbers Diameter(d)	Outer Cable Diameter
EW-M28MF-06201BB14	Φ14 mm	Φ10～14 mm
EW-M28MF-06201BB12	Φ12 mm	Φ9～12 mm
EW-M28MF-06201BB8	Φ8.5 mm	Φ5～9 mm

Rubbers Diameter

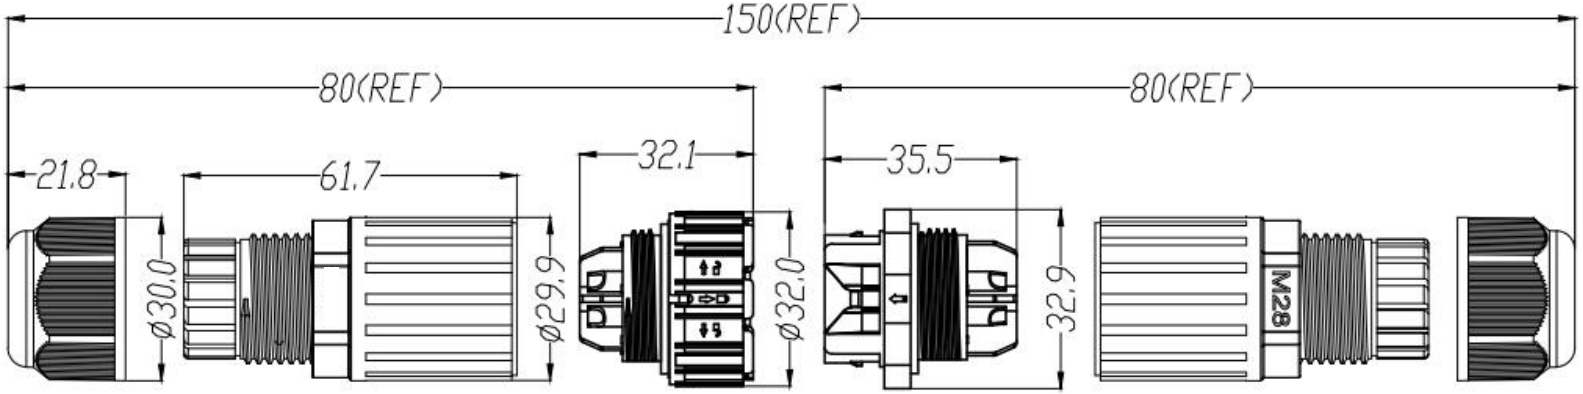

46 g	42x30x26 cm	500 PCS	23.7 Kg
Weight	MEAS	Each carton number	G.W.

TOLERANCE UNSPECIFIED				UNIT	mm	DRAW		P/N	EW-M28MF-06201BB##	FUCON
X. ±0.35	X.XX ±0.10	X.° ±3°		SCALE	1:1	CHKD		D/N	EW-M28MF-06201BB##	
X.X ±0.20	X.XXX ±0.05	X.X° ±2°	X.XX° ±1°	SHEET	1/1	APPD		TITLE	EW-M28MF-6P WATERPROOF CONNECTOR	