

DK17A Female Angle Seat Valves

INSTRUCTION MANUAL




dc DELCO

Specialized Control Valve Manufacturer



Main Parts Materials

Actuator material	PolyamidePA, stainless steel
Body material	304,316,316L
Spool material	304,316,316L
Seat material	PTFE,F46
PTFE	-30°~180°C
F46	-30°~220°C
Ambient temp	-30°~80°C
Controlling pressure	0.3~0.8BMPa
Working pressure	0-1.6MPa
Connection type	Thread
Control type	Single acting, Double acting
Applicable medium	water neutral gas or liquid, alcohol, oil, organic solvent, steam.
Optional accessory	Solenoid valve, limit switch box, positioner, etc.

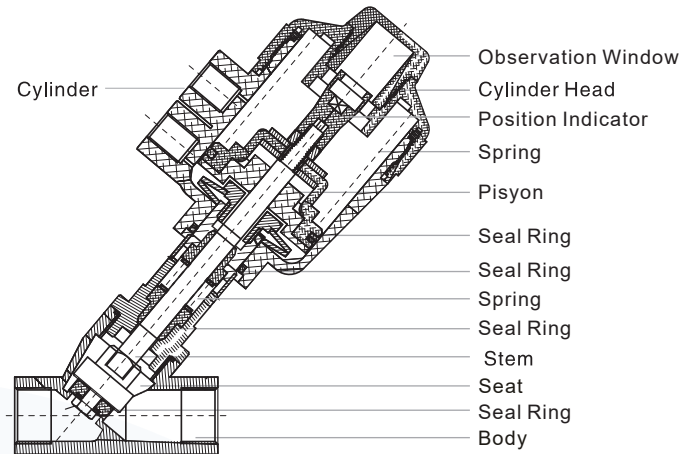


Technical Parameters


Size	Inner Diameter	Kv Valve	The Cylinder Bore	The Max Pressure Differential	Air Supply
DN10	10	3.7	50	0-16bar	4-7bar
DN15	15	4.2	50		
DN20	20	8	50		
DN25	25	19	50		
DN32	32	27.5	63		
DN40	40	42	63		
DN50	50	55	63		
DN65	65	90	80		
DN80	80		80		

Main Outline and Connecting Flange Size

Size	G	L	L1	D	H	KG
DN10	3/8"	135	65	64	110	0.8
DN15	1/2"	173	85	64	137	1.0
DN20	3/4"	178	95	64	145	1.2
DN25	1"	182	105	64	150	1.5
DN32	1-1/4"	220	120	64	185	2.6
DN40	1-1/2"	228	130	80	192	4.5
DN50	2"	235	150	80	198	6.3
DN65	2-1/2"		185			
DN80	3"		220			

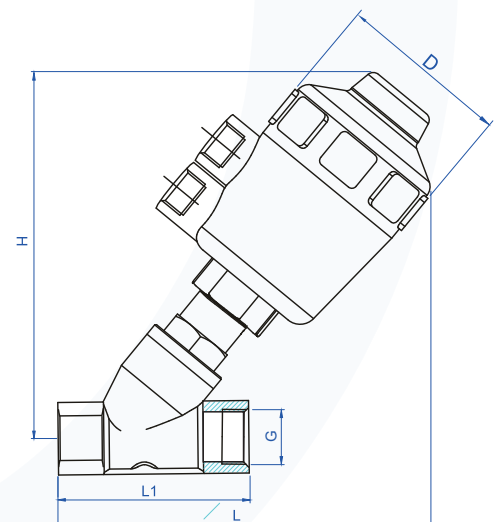

Uses and Stuctural Features of Product

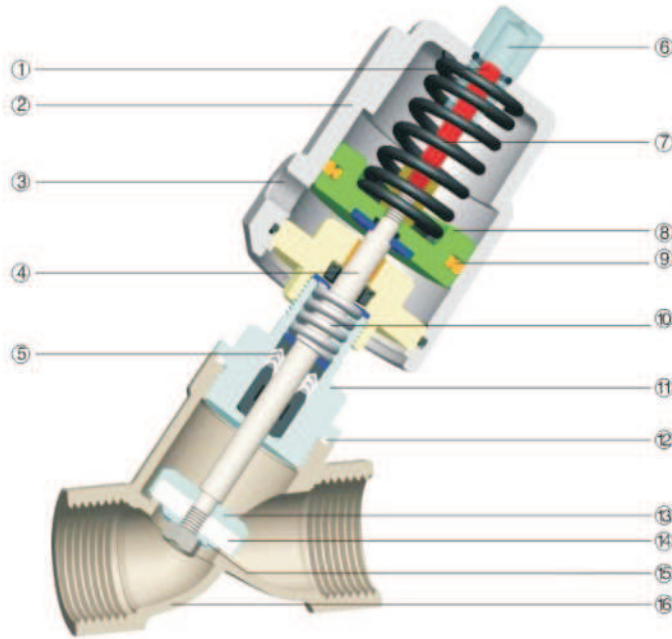

- ① Indication Rod(nylon)
- ② Actuator(CF8)
- ③ Pilot Port(1/8")
- ④ Stem(AISI316/304)
- ⑤ Stem Seal(PTFE)
- ⑥ Cap(PC)
- ⑦ Spring(Steel 65Mn)
- ⑧ Piston(Alu,alloy)
- ⑨ Piston Seal (Viton)
- ⑩ Seal Spring(AISI304)
- ⑪ ConnectingPiece(CF8M/CF8)
- ⑫ Body Seal (PTFE)
- ⑬ Valve core(CF8M/CF8)
- ⑭ Seat(PTFE)
- ⑮ Gasket(AISI316/304)
- ⑯ Body(CF8M/CF8)

Products Performance Specifucation



Applications

- ◆ Beer & Drinks Filling Machinery
- ◆ Textile Printing & Dyeing
- ◆ Gas Industry
- ◆ Pharmacy & Medical Equipment
- ◆ Chemical Industry
- ◆ Disinfection
- ◆ Frothing Equipment
- ◆ Waters/Sewage Disposal

Advantages

- ◆ Large Flux,low Resistance,No Water-hammer
- ◆ Y-type Shape Enlarged The Flowing Section, which Could Raise The Flux By 30% And Make Flow More Smooth
- ◆ Super Long Life
- ◆ Which Help The Stem Adjust And Lubricate Itself Automatically.
- ◆ The Cylinder Material Is Stainless Steel. lubricating Automatically 360°Rolling Freely.

Techical Data

Fluid Pressure	Max 1.6 MPa (232PSI)
Control Pressure	0.3-0.8MPa (43.5-116PSI)
Control Fluid	Neutral Gas,Air
Body Material	DF8M/CF8
Seals Material	PTFE
Actuator Material	CF8
Actuator Size	40mm, 50mm, 63mm, 90mm, 125mm
Applicable Fluid	Water,Alcohol,Oil,Fuel,Steam,Neutral gas or liquid,Organic Solvent,Acid and lye
Fluid Viscosity	Max 600mm/s
Fluid Temperature	-10°C--+180°C, 25°C--+220°C
Ambient Temperature	-10°C--+180°C
Control Type	Normally Closed, Normally Open, Double Acting
Connection	Threaded (BSP,BSPT,NPT) ,Welded, Flanged, Tri-Clamp

Warning: When tightening any connections to the valve, **DO NOT** use the actuator as leverage. Doing so may damage the joint between the actuator & valve.

Connection to Fluid Supply

1. Connect the fluid supply & outlet to the lower ports
2. Connect the controlling air supply to the ports on the actuator body, For double acting valves, air supplied to the lower port will open the valve, and air supplied to the upper port will close the valve

General Notes

This valve is designed to be controlled by air flow on/v. Any kind of compatible fluid may flow through the main valve body.

Fluid can flow either way through the main valve body, However, it is optimal to have the flow enter from the higher port (above seat). To reduce water hammering, the flow orientation may be switched to have the flow enter from the lower port (below seat). Please review the specification charts on pages 4 & 5 for the working pressure limits for each orientation.

The pin on top of the valve inside of the top cap (see page 2) acts as a position indicator for the valve. The pin will pop up into the top cap when the valve is open.

Reference Figures



Figure 1

2KS-1/2. Single Actuator port, with two valve Body ports.



Figure 2

2KD-1/2. Double Actuator port, with two valve Body ports.

Seeking For Global Distributors



dc DELCO

Specialized Control Valve Manufacturer



DELCO VALVE CO.LTD

Phone: +86-159 8960 2972

Website: www.delcofluid.com / www.delcovalves.com / www.delcovalve.ru

E-mail: sales@delcofluid.com

Address: Building 8A#, Tiansheng Industrial Park, Wanjiang Street, Dongguan, China

