COMMERCIAL ROLL FLOORING

RUBBER FLOORING

Biiflor China

Grandly produced by the facilities of the floor department

Biiflor ·China commercial floor

Won the Top 10 International Brands in the Elastic Flooring Industry for 2022/2023

Australia

—— Facing the future

sustainable development

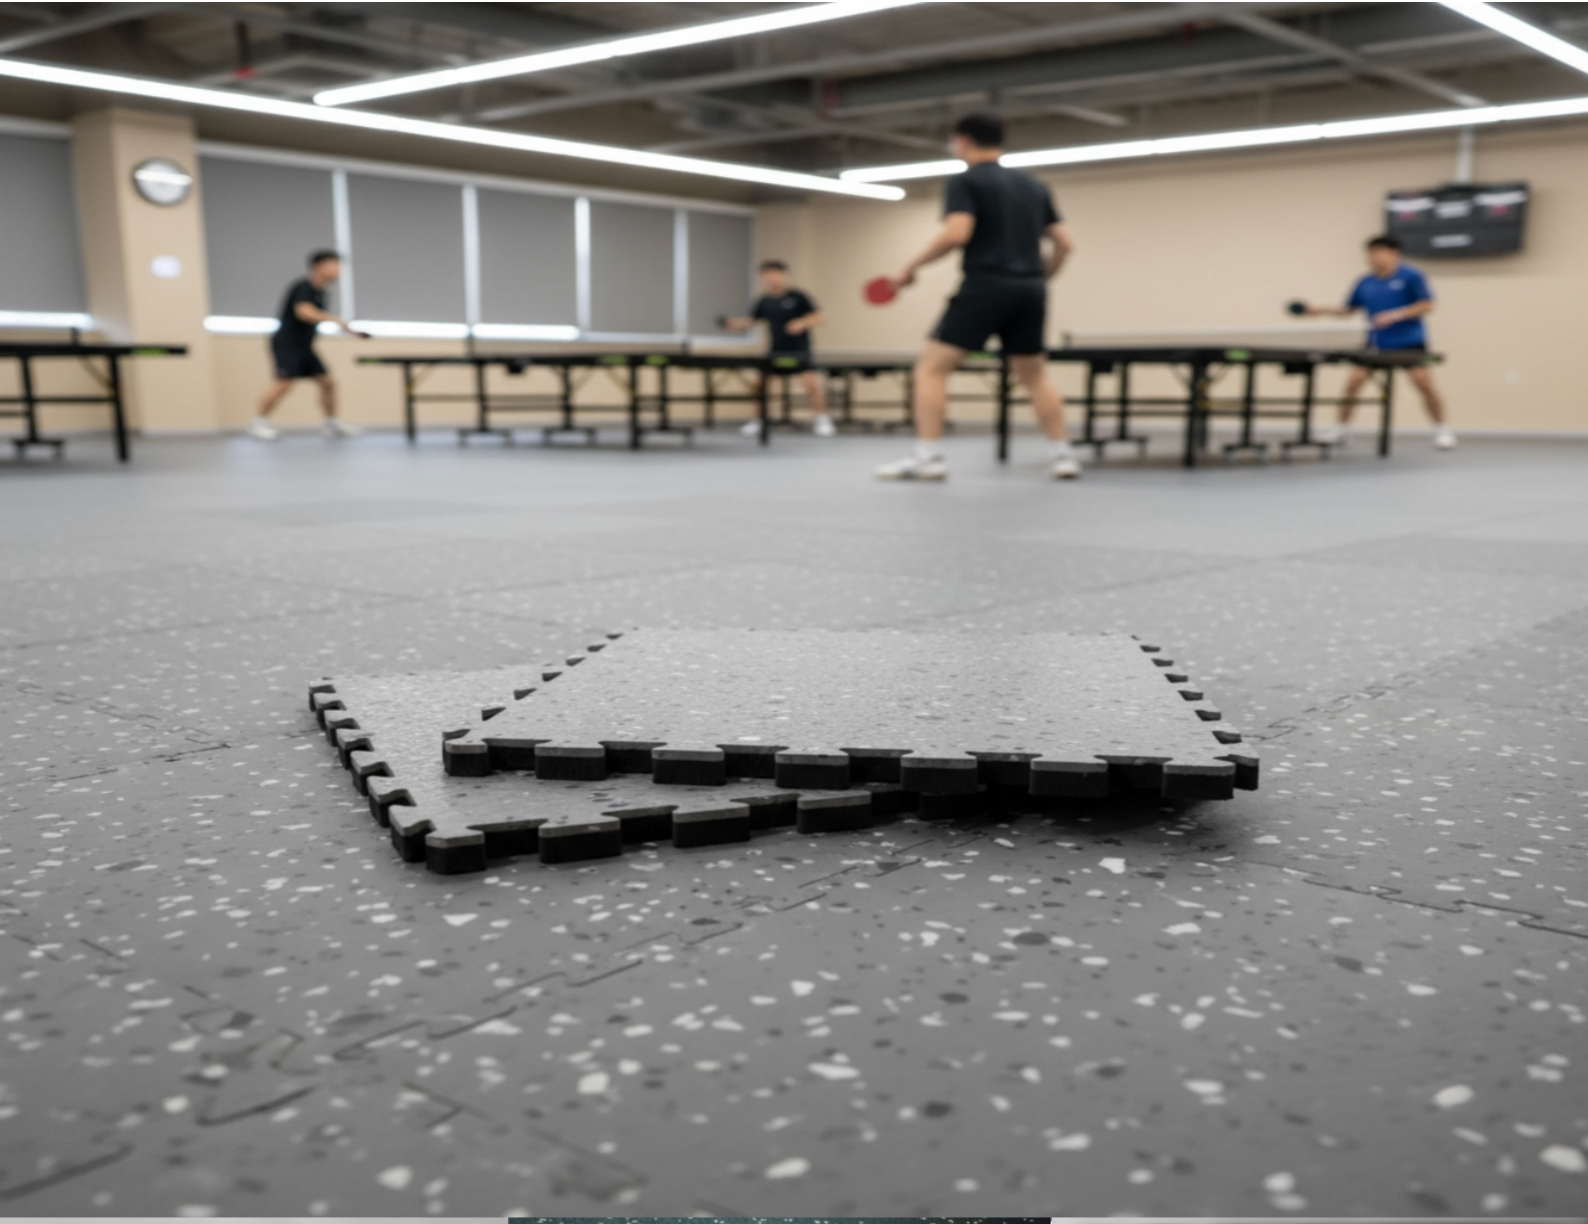

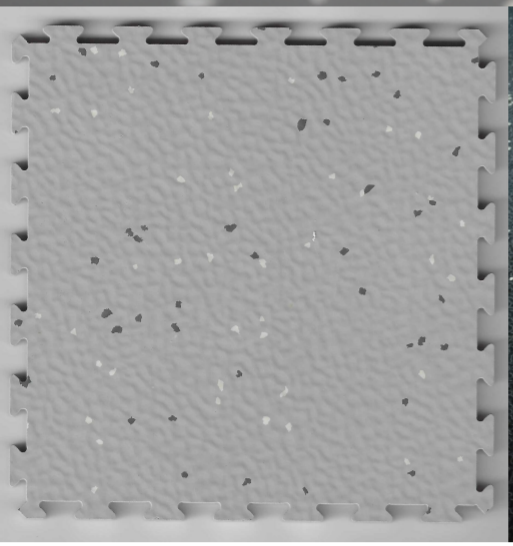



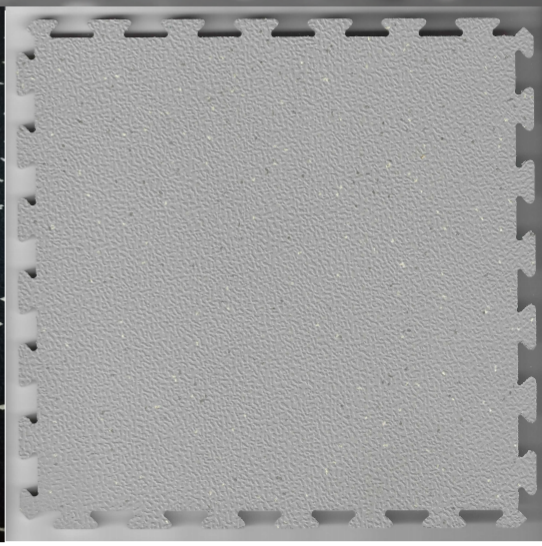

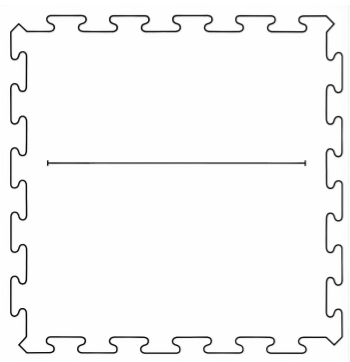

Size:
500mm*500mm
600mm*600mm
1000mm*1000mm
Customize

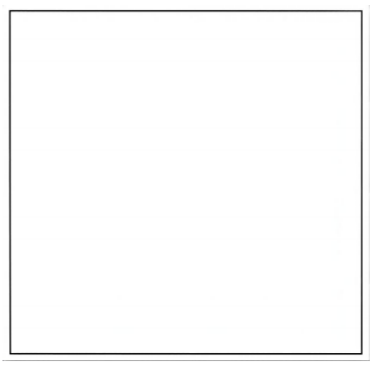

Size:
500mm*500mm
600mm*600mm
1000mm*1000mm
Customize

OEM,ODM Service

RUBBER FLOORING

Orange Peel Texture

Customizable in other colors and size

THICKNESS：5.0MM-20.0MM
SIZE：500MM*500MM
600MM*600MM
1000MM*1000MM
EDGE TYPE：INTERLOCKING/STRAIGHT

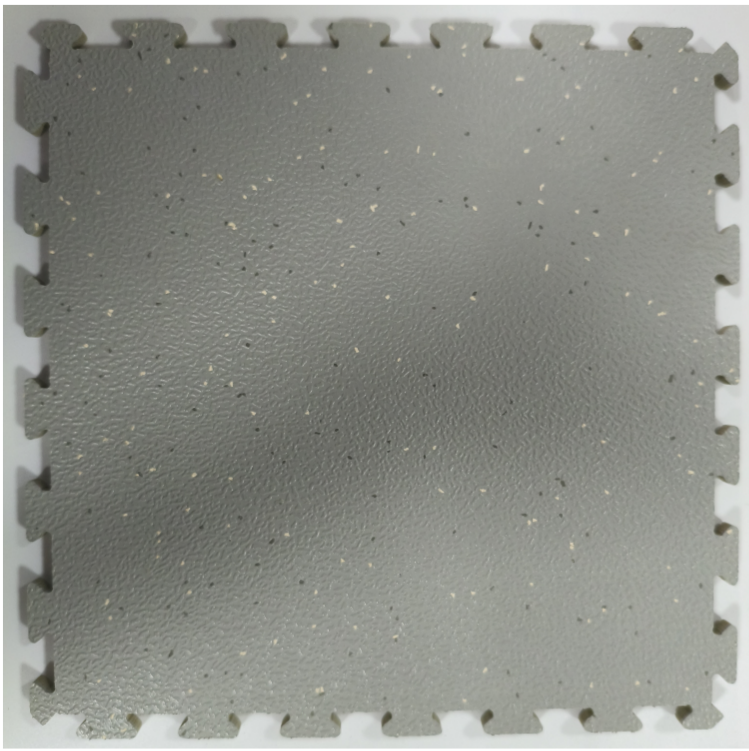

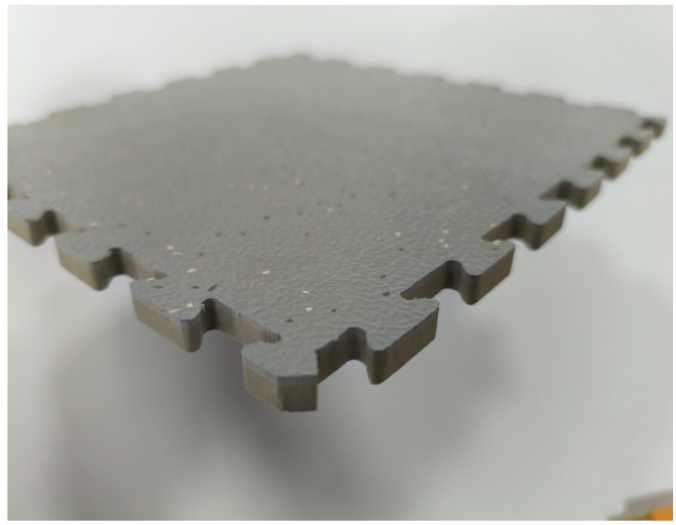



RUBBER FLOORING

Hammered Texture

Customizable in other colors and size

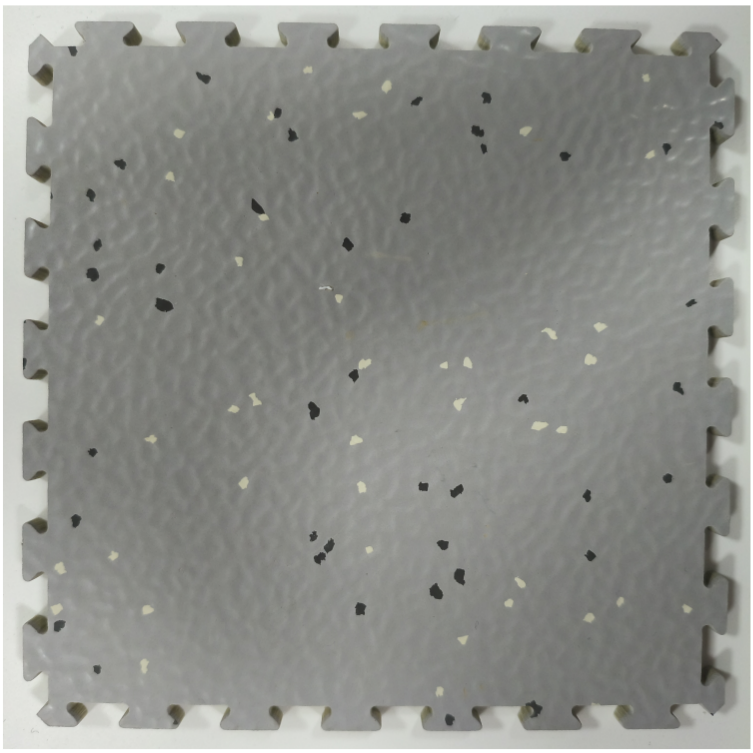

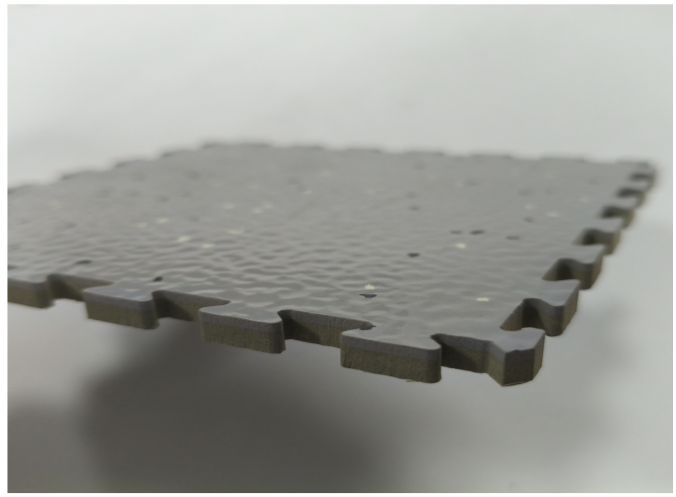

OEM,ODM Service

RUBBER FLOORING

Pure Color Hammered Texture

Customizable in other colors and size

THICKNESS：5.0MM-20.0MM
SIZE：500MM*500MM
600MM*600MM
1000MM*1000MM
EDGE TYPE：INTERLOCKING/STRAIGHT

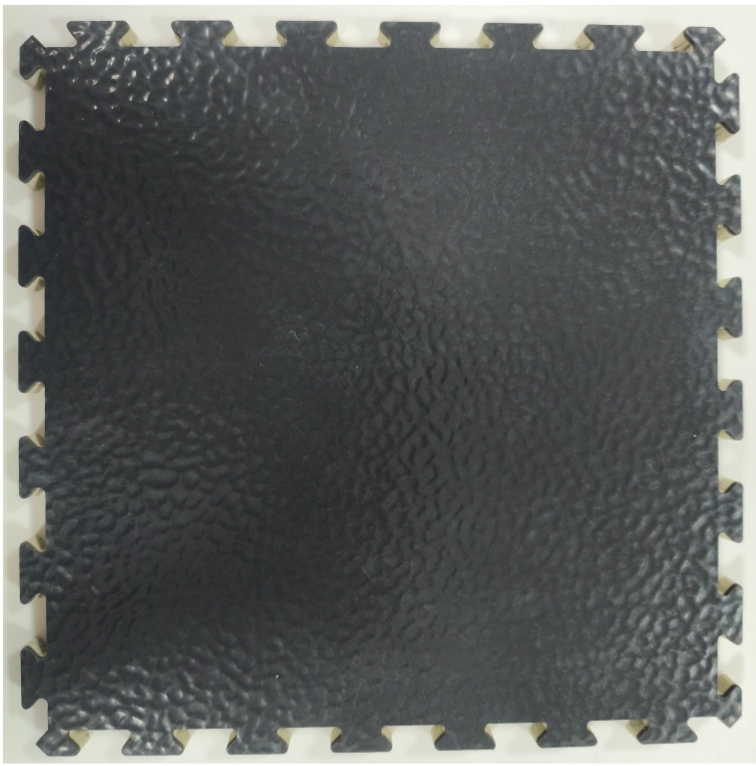

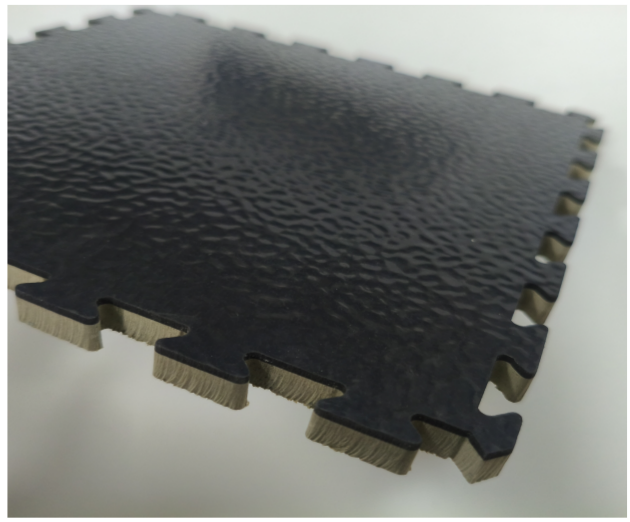

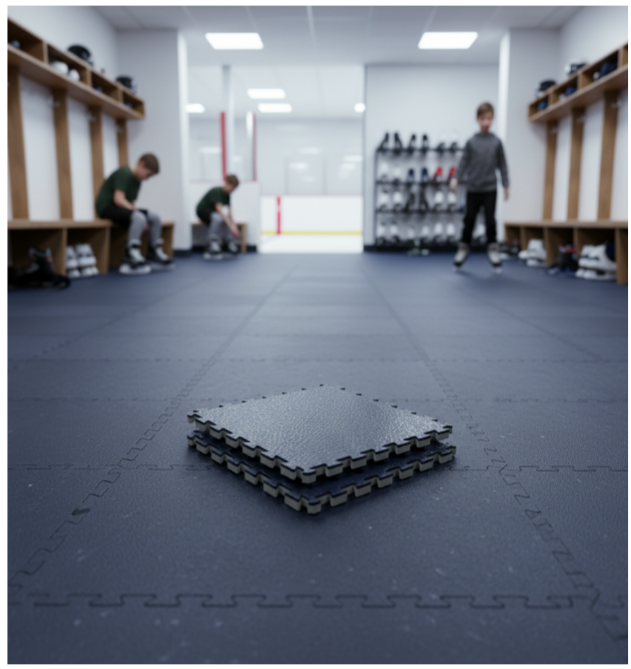

RUBBER FLOORING

Gemstone Texture

Customizable in other colors and size

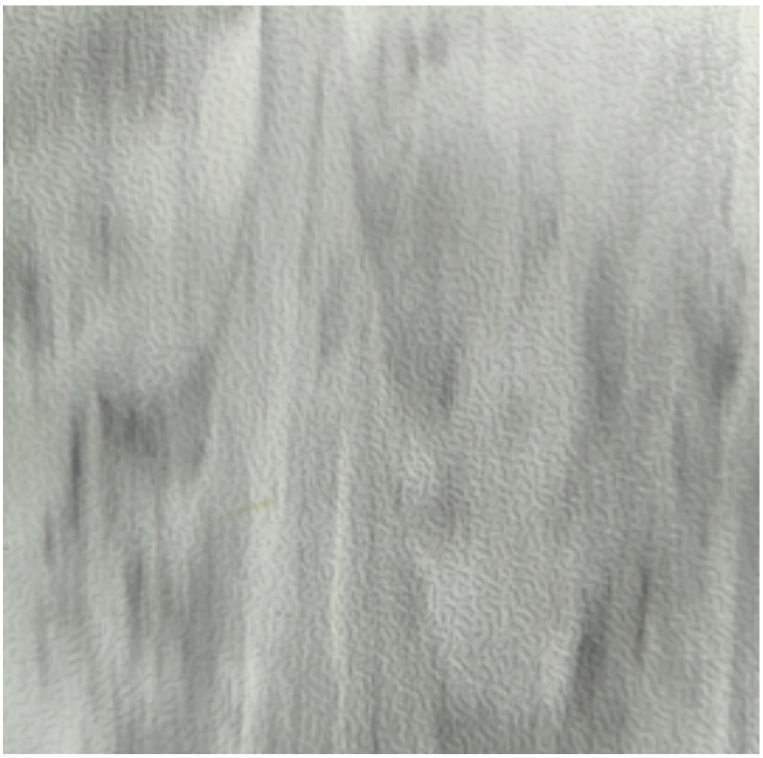

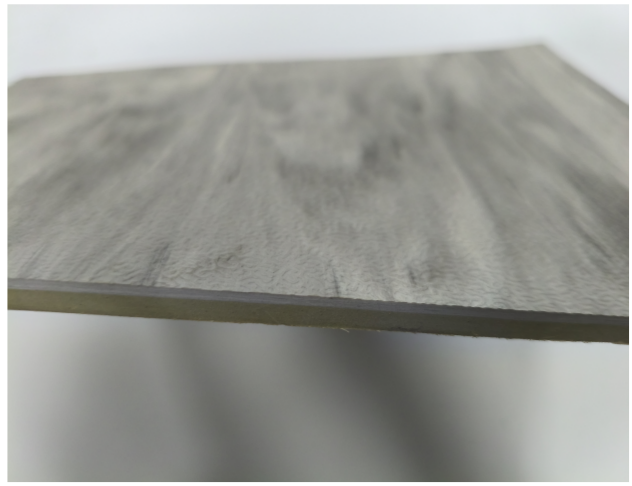

OEM,ODM Service

RUBBER FLOORING

Composite Flower Series

Customizable in other colors

THICKNESS: 2.0~4.0mm
WIDTH: 1.0m / 1.2m / 1.22m
LENGTH: 10 / 15m





3045



3080



3044



3055



3036



3050



3081



3063



3059

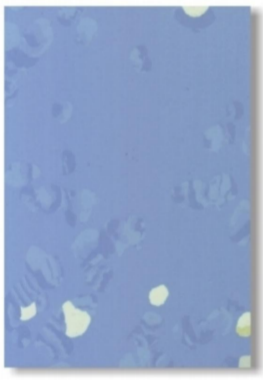

3037



3049

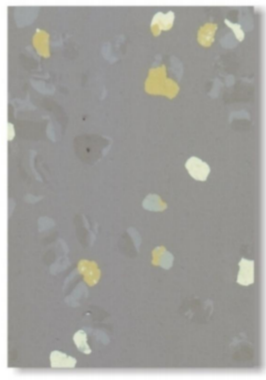

3030



3067



3056



3039



3053



3031



3064



3060

OEM,ODM Service

The sample is only for color selection purposes

RUBBER FLOORING

Monochrome Flat Series

Customizable in other colors

THICKNESS: 2.0~4.0mm
WIDTH: 1.0m / 1.2m / 1.22m
LENGTH: 10 / 15m



5019	5023	5015	5010
5020	5025	5016	5011
5021	5026	5017	5012
5022	5027	5018	5013

OEM,ODM Service

The sample is only for color selection purposes

RUBBER FLOORING

Small Floral Series

Customizable in other colors

THICKNESS: 2.0~4.0mm
WIDTH: 1.0m / 1.2m / 1.22m
LENGTH: 10 / 15m





6021



6010



6025



6034

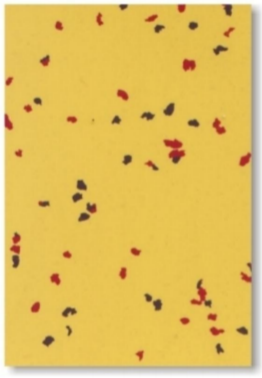

6017



6004

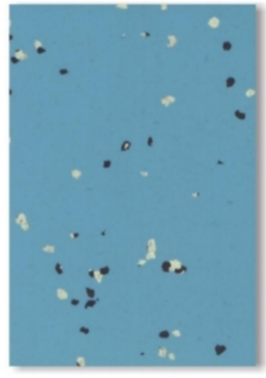

6026



6033



6001



6007

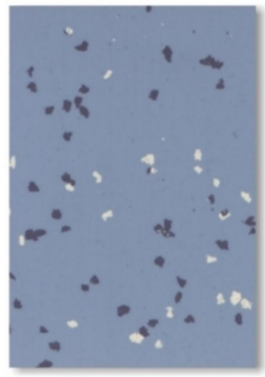

6029



6014



6024

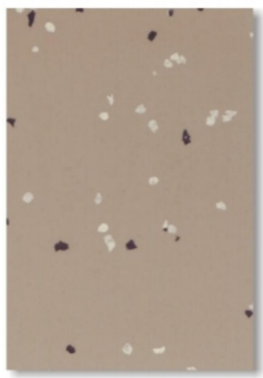

6016



6027



6013

OEM,ODM Service

The sample is only for color selection purposes

RUBBER FLOORING

Two Tone Flower Series

Customizable in other colors

THICKNESS: 2.0~4.0mm
WIDTH: 1.0m / 1.2m / 1.22m
LENGTH: 10 / 15m





7017



7021



7004



7016



7018



7022



7010



7030



7019



7023



7012

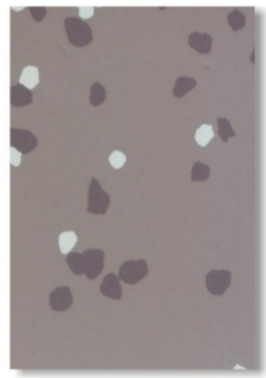

7031



7020

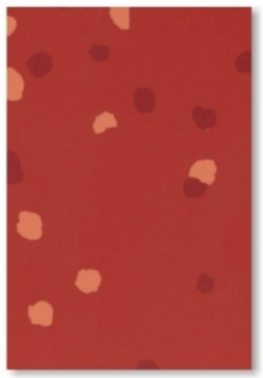

7028



7006



7032

OEM,ODM Service

The sample is only for color selection purposes

RUBBER
FLOORING

Circular Floating Point Series

size:

600*600mm
1000*1000mm

thickness:

2.5~10.0mm

3.0mm=5.4kg/m²

Customizable in other colors



10031



10021



10028



10113

ENVIRONMENT PROTECTION

FIREPROOF

WEAR RESISTANT

EASY INSTALLATION



10012



10033

Rich color design

Excellent durability and comfort, while also possessing antibacterial and sanitary functions

Does not produce harmful gases

Low VOC (volatile organic compound) emissions, environmentally friendly

Widely used in airports, education systems, medical systems, and cultural facilitiesSystem, sports system, ship&rail transit systemLarge scale systems such as elderly care systems, power systems, and office systemspublic place.



10024



10017

OEM,ODM Service

RUBBER
FLOORING

Hammer pattern floral series

size:

600*600mm
1000*1000mm

thickness:

2.5~10.0mm

3.0mm=5.4kg/m²

Customizable in other colors

ENVIRONMENT PROTECTION

FIREPROOF

WEAR RESISTANT

EASY INSTALLATION

- Rich color design
- Excellent durability and comfort, while also possessing antibacterial and sanitary functions
- Does not produce harmful gases
- Low VOC (volatile organic compound) emissions, environmentally friendly

Widely used in airports, education systems, medical systems, and cultural facilitiesSystem, sports system, ship&rail transit systemLarge scale systems such as elderly care systems, power systems, and office systemspublic place.

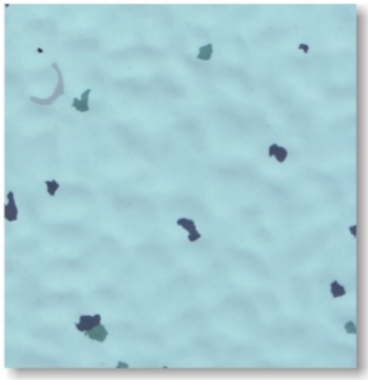

10015

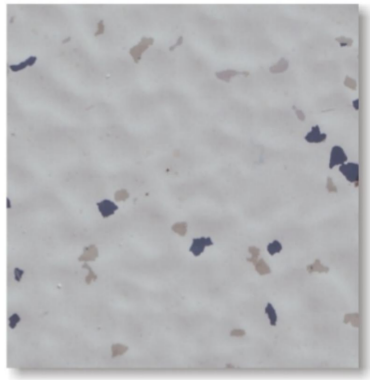

10019

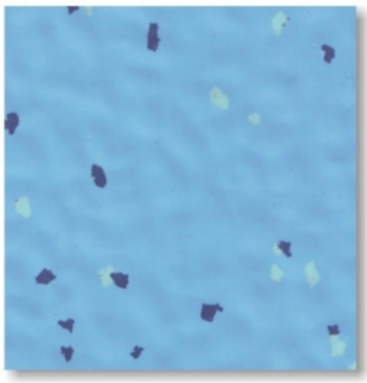

10016

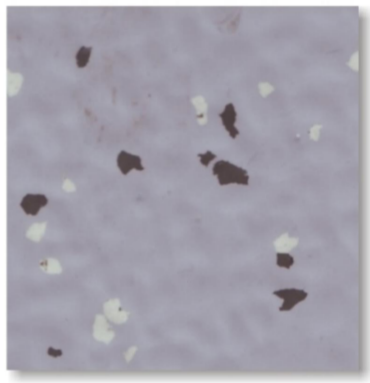

10023

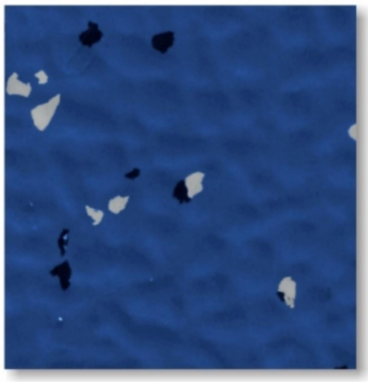

10021

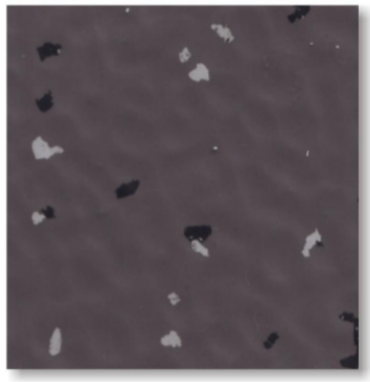

10026

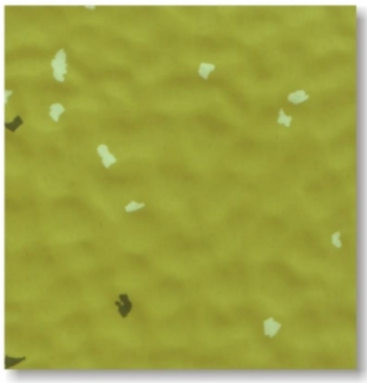

10011

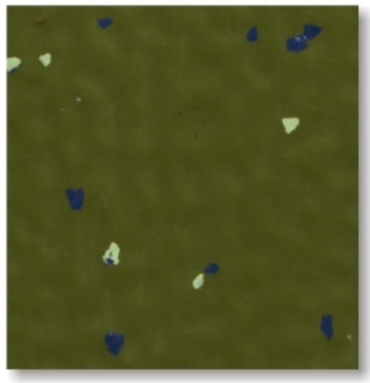

10013

OEM,ODM Service

RUBBER
FLOORING

Particle series

size:

1000*1000mm

thickness:

3.0~10.0mm

3.5mm=6.3kg/m²

Customizable in other colors

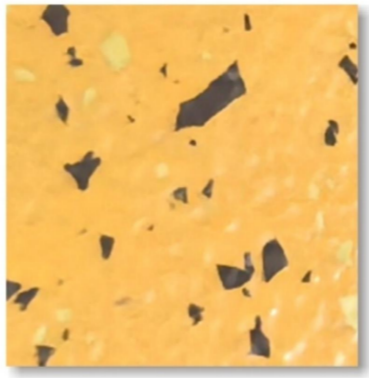

10085

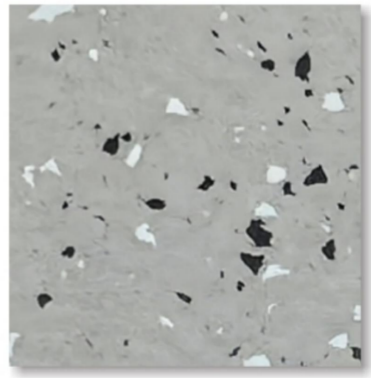

10096

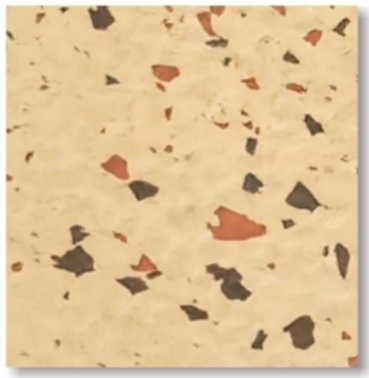

10092

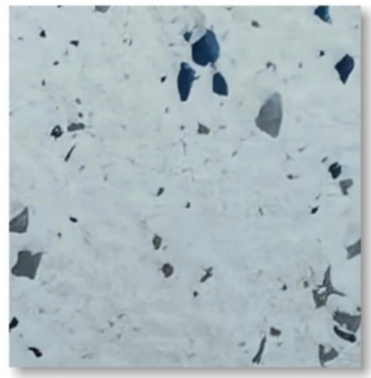

10079

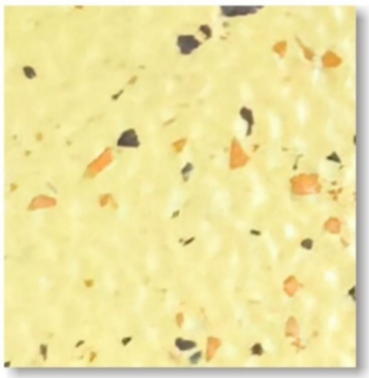

10084

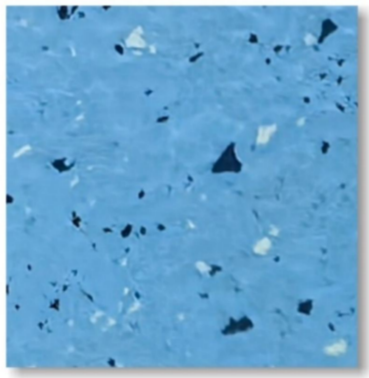

10074

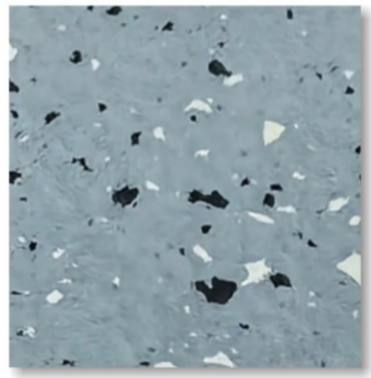

10083

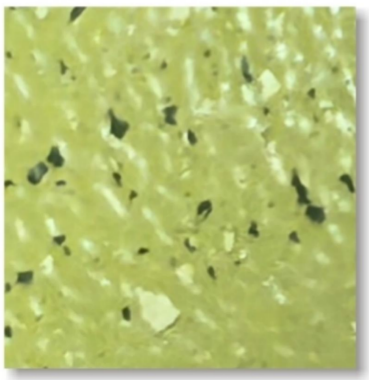

10070

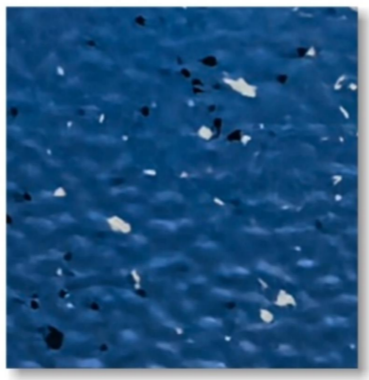

10078



10082

OEM,ODM Service

Durability and resistance to impacts

√ Industrial grade, withstand forklift and heavy-duty hand cart
√ Easy to clean and maintain thanks to itsvulcanised, non-porous design
√ Highly durable, T grade abrasion resistance, more than 20 years service life
√ Outstanding traction, slip resistance and impact absorption protect against injury
√ Non-glued, easy to install interlocking tiles

Ideal for active, multiuse space

①Factory, warehouse, assembly plant, high-pressure environment
②Physical therapy, healthcare, veterinary environments
③Sports and fitness facolotics, weight and loaker rooms
④Ice arena player tunnels and walkways
⑤Yoga and exercise studios
⑥Daycare centers, play zones, activity areas
⑦Commercial, industrial, airport spsaces



TECHNICAL SPECIFICATION

Testing items		Testing standards	Unit	Result
Flexibility		EN1817:2020&EN ISO24344:2012	20mmRound shaft, without cracks	7mmRound shaft, without cracks
Residual indentation		EN 433:1994&EN ISO24343-1:2023	≤ 0.15mm	0.02mm pass
Dimensional stability	Size change rate	EN1817:2020&EN 434&ISO23999-1	0.4%	≤ 0.1% pass
	buckling		–	0.0mm pass
Resisitance to burning cigarettes		EN1817:2020&EN 1999:1997	≥Level3	Level4 pass
Chemical resisitance	5%acetic acid	ISO 26987:2012&EN423	–	pass
	70%alcohol			pass
	5%hydrochloric acid			pass
	5%sulfuric acid			pass
	5%sodium hydroxide			pass
		EN 425:2012	No visible damage	pass
Colour fastness to light		EN ISO 105-B02:2014	≥Level3	Level6 pass
Hardness		EN1817:2020&ISO 48-4:2018	≥75 shore A	92 shore A pass
Tearing strength		ISO 34-1:2015	≥20kN/m	29kN /m pass
Abrasion resistance		EN1817:2020&ISO 4649-4:2002	≤250mm³	184.5mm³ pass
Heavy metal content	Soluble Lead (Pb)	HG/T 3747.1-2011&GB 18586-2001	≤20mg/㎡	pass
	Soluble cadmium (Cd)			pass
VCM			≤50g/㎡	pass
VOC		GB 18586-2001	≤10g/㎡	4.5g/㎡ pass
Asbestos		NIOSH 9000:2015 ISO 22262-1:2012	–	pass
N-nitrosamine		EN12868:2017	–	pass
Fire resistance		GB8624:2012 &EN13501-1	B_1_C	B_1(B-s1)
Slip resistance		DIN 51130:2014-02	–	R10
Toxicity of generated smoke		GB/T 20285-2006	LevelZA_1	Level ZA_1
Volume resistivity		IEC60093&GB/T 31838.2-2019	–	$2.2x10^{12}\Omega \cdot m$
Fungi resistance test		ISO 846:2019	–	Level 0 No Growth
Antibacterial Activity	Staphylococcus aureus	ISO 22196:2011	–	Antibacterial rate>99.99%
	Escherichia coli		–	Antibacterial rate>99.99%
SVHC	Reach219term	–	–	pass
	Ortho benzene plasticizer	EN 14372:2004	–	No
Sound insulation		ISO 10140-3	–	8dB
Smoke toxicity		DIN 53436	–	Non-toxic gases
Use class		EN ISO 10874	–	34 (commercial) 43 (industrial)
TVOC (7 days)		ISO 16000-9:2006/COR1-2007& ISO 16000-6:2011&ISO 16000-3:2011	–	0.0405mg(㎡·h)

BETTER INDOOR AIR QUALITY

RECYCLABLE

COMPOSITION 100% ACCORD WITH "REACH"

GREEN COMPOSITION

HEALTH

The sample is only for color selection purposes